

VTD-BD SERIES

DC Voltage Transducers

VTD-BD Series Voltage Transducers are high-performance transducers for sensing voltage in DC powered installations. Applicable for use on circuits to 600 VDC, VTD-BD voltage transducers provide a fully isolated +/- 5 VDC or +/- 10 VDC output signal in response to DC voltages that change polarity. Housed in an easy-to-install DIN rail or panel mount case, the VTD-BD Series comes in a variety of ranges to suit many primary voltages.




Voltage Transducer Applications

Voltage Monitoring

- Detect below normal or “brown out” voltage conditions; protect against possible motor overheating.
- Identify conductor loss conditions by detecting voltage reduction in one motor lead.
- Monitor over voltage conditions associated with regenerative voltage to help in diagnosing/avoiding motor drive issues.
- Detect voltage conditions that may cause stress in or damage to soft starter components (SCRs).

DC Voltage Transducer

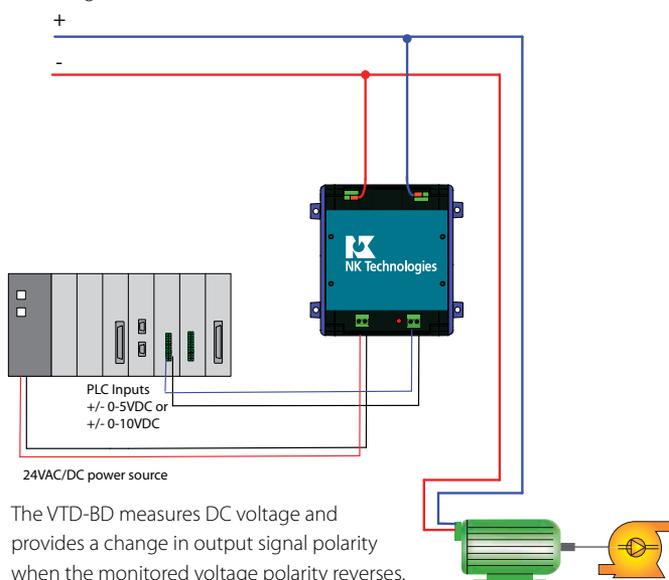

The VTD-BD measures DC voltage and provides a change in output signal polarity when the monitored voltage polarity reverses. Positive on upper right terminal creates a positive output signal; positive on upper left terminal creates a negative output signal.

Voltage Transducer Features

Wide Input Range Selection

- Six ranges of input voltages to best fit your requirements, from +/- 0–15 VDC to +/- 0–600 VDC.

+/- 5 VDC or +/- 10 VDC Sensor Powered Outputs

- Industry standard outputs makes use with existing controllers, data loggers and SCADA equipment easy and reliable.

Input/Output Isolation

- Input and output circuitry electrically isolated for improved safety of use.

DIN Rail* or Panel Mount Case

- Enclosure mounts quickly for an attractive installation.

*For information on the DIN rail accessories kit, see page 122.

OEMs


Test & Evaluation Units for OEMs

Free program expedites evaluation process. See page 1 for details.

- For additional Application Examples, go to www.nktechnologies.com/applications





Voltage Transducer Dimensions

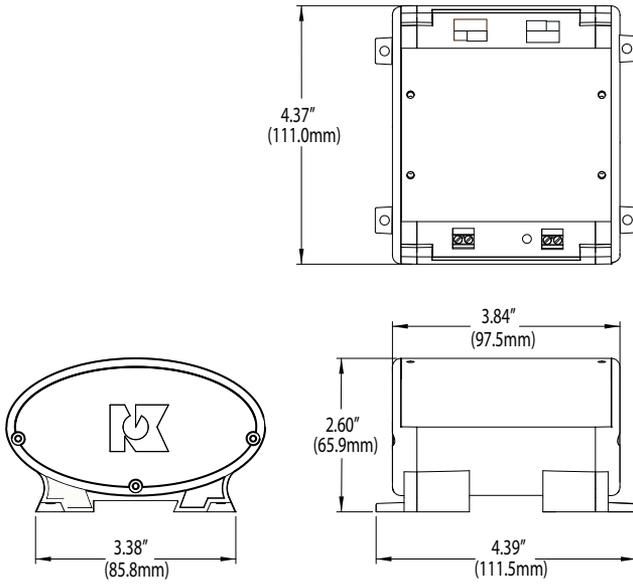

Voltage Transducer Specifications

Power Supply	24 VAC/DC (22–26V)
Input Range (+/-)	15 V, 25 V, 50 V, 150 V, 300 V, 600 VDC
Input Impedance	>160K Ω
Power Consumption	<2VA
Output	<ul style="list-style-type: none"> • +/-5 VDC • +/-10 VDC
Output Impedance	>10K Ω
Response Time	500 ms (10–90% step change)
Accuracy	1.0% of FS
Isolation Voltage	2500 V
Frequency Range	DC
Mounting	DIN rail or panel mounting
Case	UL94 V-0 Flammability Rated
Environmental	-4 to 122°F (-20 to 50°C) 0–95% RH, non-condensing
Listings	Designed to meet UL, cUL and CE

Voltage Transducer Connections

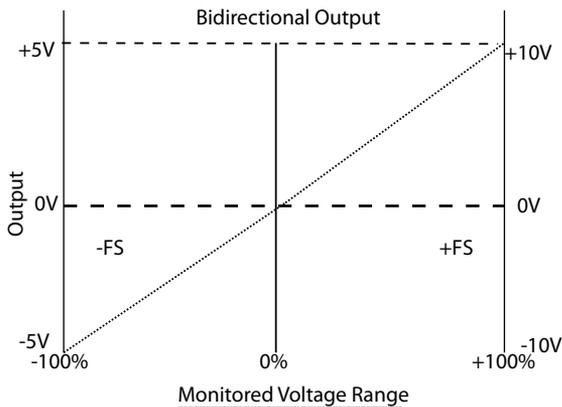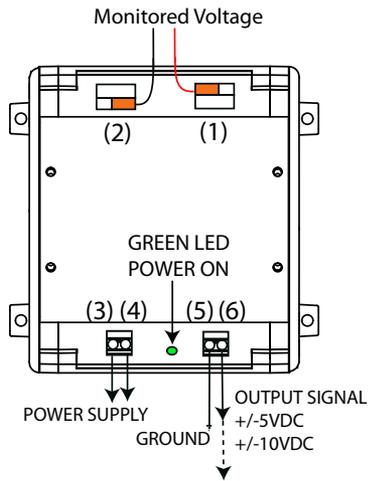

Voltage Transducer Ordering Information

Sample Model Number: VTD0-010-24U-BD-OS
DC voltage transducer with 15 V range, +/-10 VDC proportional output; 24 V externally powered, bidirectional output with a DIN rail compatible case.



(1) Nominal Range

0	+/-15 V
1	+/-25 V
2	+/-50 V
3	+/-150 V
4	+/-300 V
5	+/-600 V

(2) Output Signal

005	+/-5 VDC
010	+/-10 VDC

(3) Supply Voltage

24U	24 VAC/DC external power supply
-----	---------------------------------

(4) Output Type

BD	Bidirectional output
----	----------------------

(5) Mounting

OS	DIN rail or panel mounting
----	----------------------------