



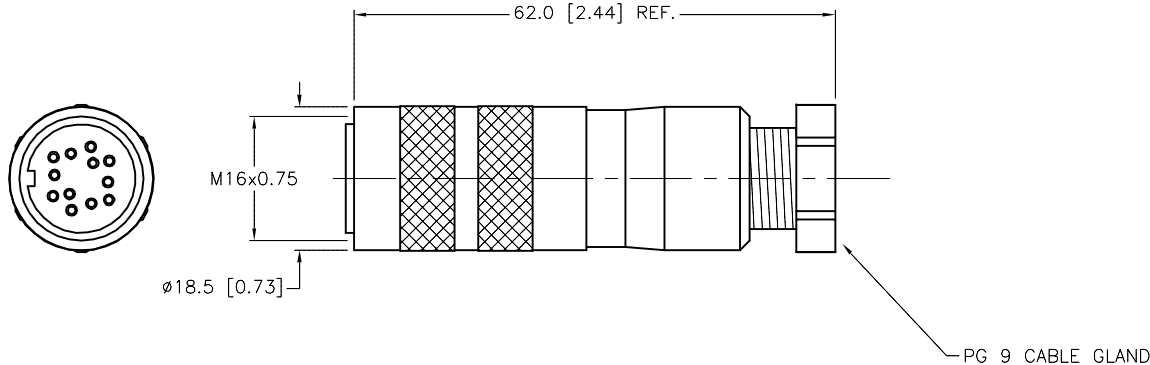
FEMALE END VIEW




 M16 connector

SPECIFICATIONS

CONTACT CARRIER MATERIAL	PBT
CONTACT MATERIAL/PLATING	BRONZE/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	3.0 A
RATED VOLTAGE [V]	60 V AC/DC
TEMPERATURE RANGE	-40°C to +95°C [-40°F to +203°F]
CABLE GLAND	PG 9 - ACCEPTS 6-8mm CABLE
TERMINATION TYPE	SOLDER CUP
PROTECTION CLASS	MEETS IEC IP67



SOURCE DRAWING - FOR REFERENCE ONLY

					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		<div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</div>			
					1.				<b>TURCK INC</b> <i>High Technology Sensors and Automation Controls</i>					
					2.									
					3.									
4.														
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RDS		DATE 04/05/16		DESCRIPTION  BKS 12-0	
					SEE SPECIFICATIONS				APVD M.B.		SCALE 1 = 1.0			
					FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT  <b>MILLIMETER [ INCH ]</b>		IDENTIFICATION NO.  U0882-20		REV  A	
					SEE SPECIFICATIONS									
A	DRAWING RELEASE			RDS	05/19/16									
REV	DESCRIPTION			BY	DATE		ECO NO.				FILE: U0882-20		SHEET 1 OF 1	