



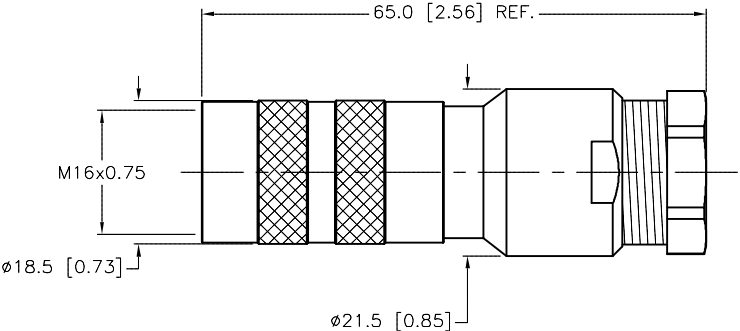
FEMALE END VIEW




 M16 connector

SPECIFICATIONS

CONTACT CARRIER MATERIAL	NYLON
CONTACT MATERIAL/PLATING	COPPER ALLOY/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	3.0 A
RATED VOLTAGE [V]	60 V AC/DC
TEMPERATURE RANGE	-30°C to +95°C [-22°F to +203°F]
PROTECTION CLASS	MEETS IEC IP67
CABLE RANGE	8-10mm CABLE
TERMINATION TYPE	SOLDER CUP
MAX. CONDUCTOR SIZE	24 AWG



SOURCE DRAWING - FOR REFERENCE ONLY

					RELATED DOCUMENTS		3RD ANGLE PROJECTION		<div>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</div>		<div><div><div>TURCK INC</div><div>High Technology Sensors and Automation Controls</div></div><div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</div></div>							
					1.													
					2.													
					3.													
4.					MATERIAL		<div>ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</div>		DRFT		RDS		DATE		06/13/16		DESCRIPTION  BKS 14-0/8-10MM	
FINISH					APVD				C.K.		SCALE		1=1.0					
										<div>CONTACT TURCK FOR MORE INFORMATION</div>		UNIT OF MEASUREMENT				IDENTIFICATION NO.		
MILLIMETER [ INCH ]				U2-27259								A						
									DO NOT SCALE THIS DRAWING				FILE: U2-27259				SHEET 1 OF 1	

A	DRAWING RELEASE			RDS	06/13/16	
REV	DESCRIPTION			BY	DATE	ECO NO.