



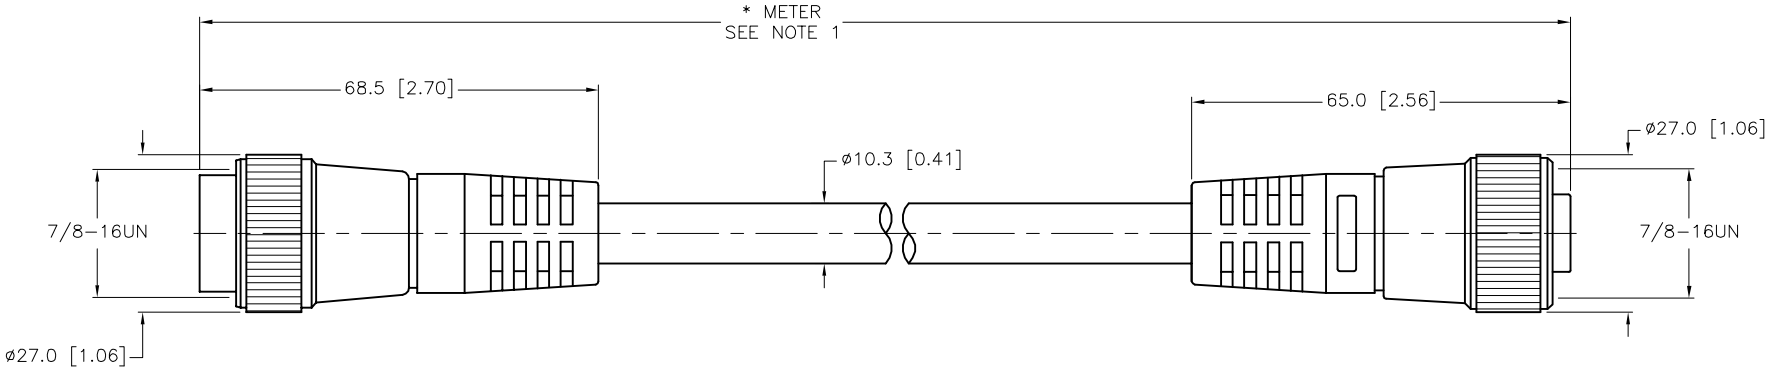


MALE END VIEW	FEMALE END VIEW	SPECIFICATIONS	
 <p>1 (LONG)</p> <p>1 = GREEN/YELLOW 2 = RED/BLACK 3 = RED/WHITE</p> 	 <p>1</p> <p>1 = GREEN/YELLOW 2 = RED/BLACK 3 = RED/WHITE</p> 	CONTACT CARRIER MATERIAL	TPU/YELLOW
		MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
		RATED CURRENT [A]	10.0 A
		RATED VOLTAGE [V]	600 V
		OUTER JACKET MATERIAL/COLOR	CPE/YELLOW
		CONDUCTOR INSULATION MATERIAL	EPDM
		NUMBER OF CONDUCTORS	3x16 AWG
		TEMPERATURE RATING	-50°C to +105°C (-58°F to 221°F)
		PROTECTION CLASS	NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K




CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

- "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
- "/S600" DESIGNATES HEAVY DUTY RUBBER JACKET AND CONDUCTOR INSULATION.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS					3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.							DRFT RDS		DATE 11/29/06	
MATERIAL					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=1.3	
FINISH					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT		DESCRIPTION	
SEE SPECIFICATIONS					DO NOT SCALE THIS DRAWING		MILLIMETER [INCH]		RYM RKM 35-*M/S600	
SEE SPECIFICATIONS									IDENTIFICATION NO.	
									REV	
I UPDATE PROTECTION CLASS									FILE: 777014965	
REV DESCRIPTION									SHEET 1 OF 1	
CBM 04/13/21 76628										
BY DATE ECO NO.										