






MALE END VIEW	FEMALE END VIEW	SPECIFICATIONS																									
(LONG)  1 = BARE (SHIELD) 2 = RED (+ VOLTAGE) 3 = BLACK (- VOLTAGE) 4 = WHITE (CAN_H) 5 = BLUE (CAN_L)	 1 = BARE (SHIELD) 2 = RED (+ VOLTAGE) 3 = BLACK (- VOLTAGE) 4 = WHITE (CAN_H) 5 = BLUE (CAN_L)	<table><tr><td>CONTACT CARRIER MATERIAL</td><td>TPU</td></tr><tr><td>MOLDED MATERIAL/COLOR</td><td>TPU/BLUE-GREY</td></tr><tr><td>COUPLING NUT MATERIAL/PLATING</td><td>BRASS/NICKEL</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>RATED CURRENT [A]</td><td>9.0 A</td></tr><tr><td>RATED VOLTAGE [V]</td><td>600 V</td></tr><tr><td>CABLE JACKET/COLOR</td><td>PVC/CHARCOAL GREY</td></tr><tr><td>CONDUCTOR INSULATION MATERIAL</td><td>FOAMED HDPE (DATA), PVC (POWER)</td></tr><tr><td>NUMBER OF CONDUCTORS [AWG]</td><td>2x18 AWG, 2x15 AWG, 18 AWG DRAIN</td></tr><tr><td>SHIELDING</td><td>FOIL & TINNED COPPER DOUBLE-SPIRAL SHIELD</td></tr><tr><td>TEMPERATURE RATING</td><td>-40°C to +75°C (-40°F to +167°F)</td></tr><tr><td>PROTECTION CLASS</td><td>NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K</td></tr></table>	CONTACT CARRIER MATERIAL	TPU	MOLDED MATERIAL/COLOR	TPU/BLUE-GREY	COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL	CONTACT MATERIAL/PLATING	BRASS/GOLD	RATED CURRENT [A]	9.0 A	RATED VOLTAGE [V]	600 V	CABLE JACKET/COLOR	PVC/CHARCOAL GREY	CONDUCTOR INSULATION MATERIAL	FOAMED HDPE (DATA), PVC (POWER)	NUMBER OF CONDUCTORS [AWG]	2x18 AWG, 2x15 AWG, 18 AWG DRAIN	SHIELDING	FOIL & TINNED COPPER DOUBLE-SPIRAL SHIELD	TEMPERATURE RATING	-40°C to +75°C (-40°F to +167°F)	PROTECTION CLASS	NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K	
CONTACT CARRIER MATERIAL	TPU																										
MOLDED MATERIAL/COLOR	TPU/BLUE-GREY																										
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL																										
CONTACT MATERIAL/PLATING	BRASS/GOLD																										
RATED CURRENT [A]	9.0 A																										
RATED VOLTAGE [V]	600 V																										
CABLE JACKET/COLOR	PVC/CHARCOAL GREY																										
CONDUCTOR INSULATION MATERIAL	FOAMED HDPE (DATA), PVC (POWER)																										
NUMBER OF CONDUCTORS [AWG]	2x18 AWG, 2x15 AWG, 18 AWG DRAIN																										
SHIELDING	FOIL & TINNED COPPER DOUBLE-SPIRAL SHIELD																										
TEMPERATURE RATING	-40°C to +75°C (-40°F to +167°F)																										
PROTECTION CLASS	NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K																										
																											

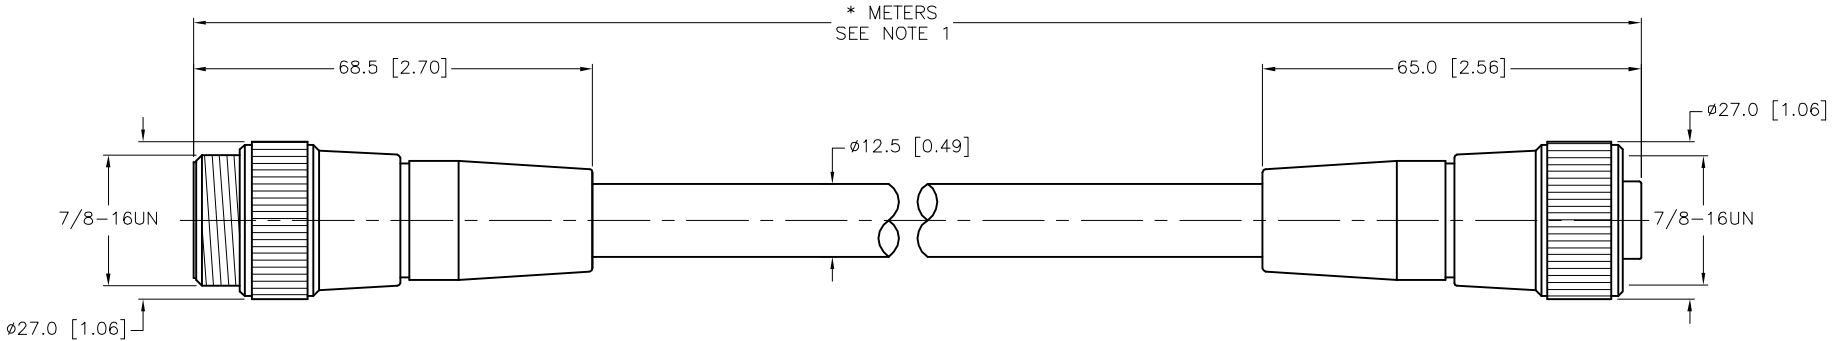


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

50-69mm±3.0mm 70-100mm±4.0mm OVER 100mm±5.0mm * UNLESS OTHERWISE SPECIFIED					RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us 														
NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.					MATERIAL SEE SPECIFICATIONS		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RDS		DATE 06/10/04		DESCRIPTION RSM RKM 5727-*M												
					FINISH SEE SPECIFICATIONS				APVD		SCALE NONE		IDENTIFICATION NO. REV G												
					<table><tr><td>G</td><td>UPDATE PROTECTION CLASS</td><td>CBM</td><td>04/13/21</td><td>76628</td></tr><tr><td>REV</td><td>DESCRIPTION</td><td>BY</td><td>DATE</td><td>ECO NO.</td></tr></table>					G	UPDATE PROTECTION CLASS	CBM			04/13/21	76628	REV	DESCRIPTION	BY	DATE	ECO NO.	UNIT OF MEASUREMENT MILLIMETER [INCH]		DO NOT SCALE THIS DRAWING	
										G	UPDATE PROTECTION CLASS	CBM	04/13/21	76628											
REV	DESCRIPTION	BY	DATE	ECO NO.																					