




FEMALE END VIEW	MALE END VIEW	SPECIFICATIONS	
 1 = WHITE 2 = BROWN 3 = GREEN 4 = YELLOW 5 = GREY 6 = PINK 7 = BLUE 8 = RED 	 1 = WHITE 2 = BROWN 3 = GREEN 4 = YELLOW 5 = GREY 6 = PINK 7 = BLUE 8 = RED 	CONTACT CARRIER MATERIAL	NYLON OR TPU
		MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
		CONTACT MATERIAL/PLATING	BRASS/GOLD
		COUPLING NUT MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED
		RATED CURRENT [A]	2.0 A
		RATED VOLTAGE [V]	60 VAC/75 VDC
		OUTER CABLE JACKET MATERIAL/COLOR	PVC/GREY
		CONDUCTOR INSULATION MATERIAL	PVC
		NUMBER OF CONDUCTORS [AWG]	8x24 AWG
		TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
		PROTECTION CLASS	NEMA 1,3,4,6P AND IEC IP68, IP69K

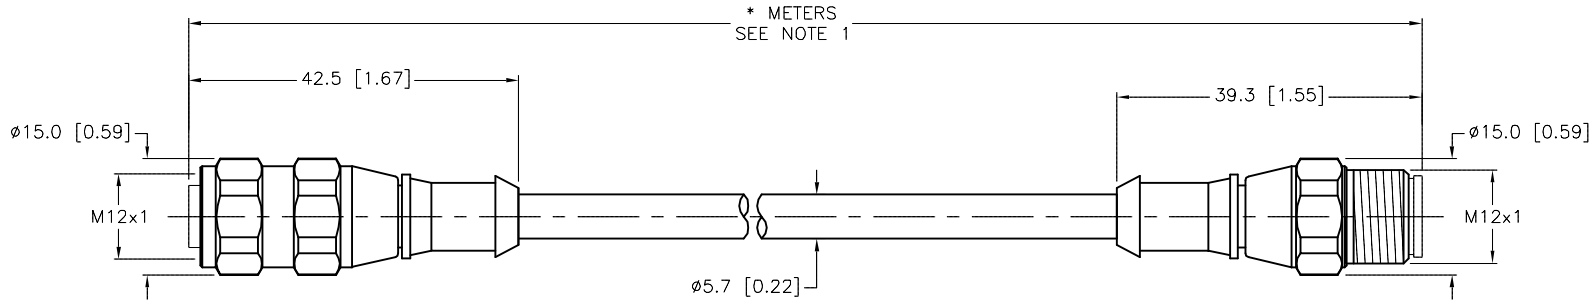


CABLE LENGTH	TOLERANCE *
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE *
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm
* UNLESS OTHERWISE SPECIFIED	

NOTES:

1."*" DESIGNATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RDS	DATE	04/03/15	DESCRIPTION RKV 8T--*--RSV 8T	
SEE SPECIFICATIONS		APVD	L.H.	SCALE	1=1.0		
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.	
SEE SPECIFICATIONS							
		DO NOT SCALE THIS DRAWING				REV A	
	FILE: 777035033				SHEET 1 OF 1		

A	DRAWING RELEASE	RDS	04/07/15	
REV	DESCRIPTION	BY	DATE	ECO NO.