




FEMALE END VIEW		MALE END VIEW		SPECIFICATIONS	
					
1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK		1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK			
					
				CONTACT CARRIER MATERIAL NYLON OR TPU	
				MOLDED HEAD MATERIAL/COLOR TPU/YELLOW	
				CONTACT MATERIAL/PLATING BRASS/GOLD	
				COUPLING NUT MATERIAL/FINISH STAINLESS STEEL/PASSIVATED	
				RATED CURRENT [A] 4.0 A	
				RATED VOLTAGE [V] 250 V	
				OUTER CABLE JACKET MATERIAL/COLOR PVC/GRAY	
				CONDUCTOR INSULATION MATERIAL PVC	
				NUMBER OF CONDUCTORS [AWG] 4x22 AWG	
				TEMPERATURE RANGE -40°C to +105°C (-40°F to +221°F)	
				PROTECTION CLASS MEETS NEMA 1,3,4,6P AND IEC IP67	

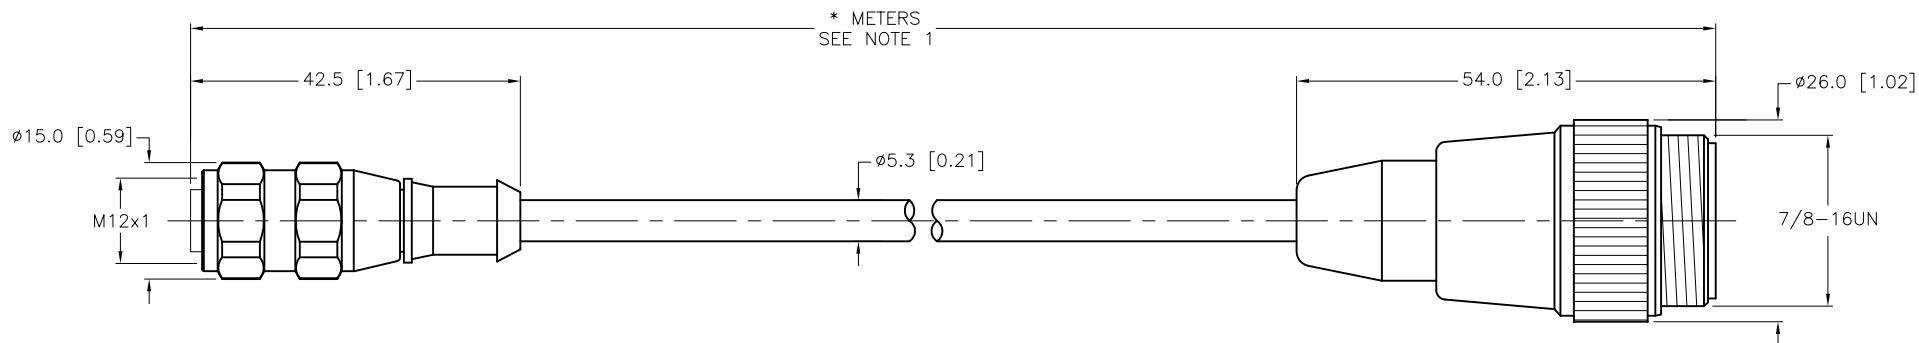

CABLE LENGTH	TOLERANCE
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

30–49mm±2.0mm 50–69mm±3.0mm 70–100mm±4.0mm OVER 100mm±5.0mm					RELATED DOCUMENTS 1. 2. 3. 4.					3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1–800–544–7769 (763) 553–7300 (763) 553–0708 fax turck.com		
NOTES: 1. "∗" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.					MATERIAL SEE SPECIFICATIONS					ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RDS DATE 07/18/11		DESCRIPTION RKV 4.4T–∗–RSV 40			
FINISH SEE SPECIFICATIONS					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]			APVD SCALE 1=1.0		IDENTIFICATION NO.		REV B			
DO NOT SCALE THIS DRAWING					FILE: 777027900					SHEET 1 OF 1							
B UPDATE CABLE DIAMETER		KMY 04/09/12		37143		REV DESCRIPTION		BY DATE		ECO NO.							