


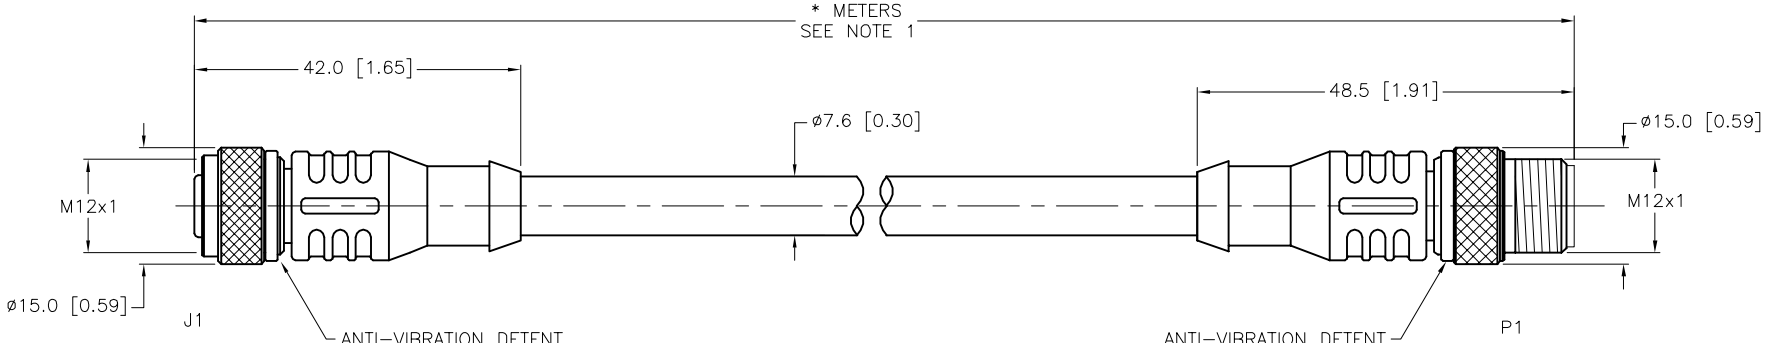



FEMALE END VIEW	MALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 <p>1 = BROWN 2 = WHITE 3 = BLUE 4 = BLACK 5 = GREY</p>	 <p>1 = BLACK 2 = WHITE 3 = BLUE 4 = BROWN 5 = GREY</p>		CONTACT CARRIER MATERIAL	NYLON OR TPU
			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	4.0 A
			RATED VOLTAGE [V]	250 V
			OUTER CABLE JACKET MATERIAL/COLOR	TPE/YELLOW
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBER OF CONDUCTORS [AWG]	5x18 AWG
			TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68

																			
<table border="1"> <thead> <tr> <th>CABLE LENGTH</th><th>TOLERANCE *</th></tr> </thead> <tbody> <tr> <td>ALL LENGTHS</td><td>+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER</td></tr> </tbody> </table> <table border="1"> <thead> <tr> <th>STRIP LENGTH</th><th>TOLERANCE *</th></tr> </thead> <tbody> <tr> <td>0-7mm</td><td>±0.5mm</td></tr> <tr> <td>8-29mm</td><td>±1.0mm</td></tr> <tr> <td>30-49mm</td><td>±2.0mm</td></tr> <tr> <td>50-69mm</td><td>±3.0mm</td></tr> <tr> <td>70-100mm</td><td>±4.0mm</td></tr> <tr> <td>OVER 100mm</td><td>±5.0mm</td></tr> </tbody> </table> <p>* UNLESS OTHERWISE SPECIFIED</p>		CABLE LENGTH	TOLERANCE *	ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER	STRIP LENGTH	TOLERANCE *	0-7mm	±0.5mm	8-29mm	±1.0mm	30-49mm	±2.0mm	50-69mm	±3.0mm	70-100mm	±4.0mm	OVER 100mm	±5.0mm
CABLE LENGTH	TOLERANCE *																		
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER																		
STRIP LENGTH	TOLERANCE *																		
0-7mm	±0.5mm																		
8-29mm	±1.0mm																		
30-49mm	±2.0mm																		
50-69mm	±3.0mm																		
70-100mm	±4.0mm																		
OVER 100mm	±5.0mm																		
<p>NOTES:</p> <p>1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.</p> <p>2. "/S1587" DESIGNATES "WELDLIFE" CABLE.</p> <p>3. "/S3343" DESIGNATES CUSTOM WIRING.</p>																			
<p style="text-align: right;">SOURCE DRAWING - FOR REFERENCE ONLY</p>																			
<p>RELATED DOCUMENTS</p> <p>1. 2. 3. 4.</p>	<p>3RD ANGLE PROJECTION</p> 																		
<p>MATERIAL</p> <p>SEE SPECIFICATIONS</p>	<p>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</p> <p>DRFT TV DATE 07/08/16</p> <p>APVD K.Y. SCALE 1=1.0</p>																		
<p>FINISH</p> <p>SEE SPECIFICATIONS</p>	<p>UNIT OF MEASUREMENT</p> <p>MILLIMETER [INCH]</p> <p>DO NOT SCALE THIS DRAWING</p>																		
<p>DESCRIPTION</p> <p>RKC 4.5T-*--RSC 4.5T/S1587/S3343</p>																			
<p>IDENTIFICATION NO.</p> <p>FILE: 777037853</p>																			
<p>REV</p> <p>A</p>																			
<p>SHEET 1 OF 1</p>																			