


MALE END VIEW


FEMALE END VIEW

SPECIFICATIONS




1 = WHITE #1
2 = WHITE #2
3 = WHITE #3
4 = WHITE #4
5 = WHITE #5
6 = YELLOW/BLACK #6
7 = YELLOW/BLACK #7
8 = YELLOW/BLACK #8
9 = YELLOW/BLACK #9
10 = YELLOW/BLACK #10
11 = PINK/BLACK #11
12 = PINK/BLACK #12
13 = PINK/BLACK #13

14 = PINK/BLACK #14
15 = PINK/BLACK #15
16 = ORANGE/BLACK #16
17 = ORANGE/BLACK #17
18 = ORANGE/BLACK #18
19 = ORANGE/BLACK #19
20 = ORANGE/BLACK #20
21 = BLUE/BLACK #21
22 = BLUE/BLACK #22
23 = BLUE/BLACK #23
24 = BLUE/BLACK #24
25 = BLUE/BLACK #25
26 = GREEN/BLACK #26



CONTACT CARRIER MATERIAL	NYLON or PBT
CONTACT MATERIAL/PLATING	BRASS/GOLD
CONNECTOR HOUSING MATERIAL/PLATING	BRASS/NICKEL
MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
RATED CURRENT [A]	3.0 A
RATED VOLTAGE [V]	150 V
OUTER JACKET MATERIAL/COLOR	TPE/BLACK
CONDUCTOR INSULATION MATERIAL	POLYESTER ELASTOMER
NUMBER OF CONDUCTORS [AWG]	30x22 AWG
PROTECTION CLASS	IEC IP67
TEMPERATURE	-40°C TO +105°C (-40°F TO +221°F)

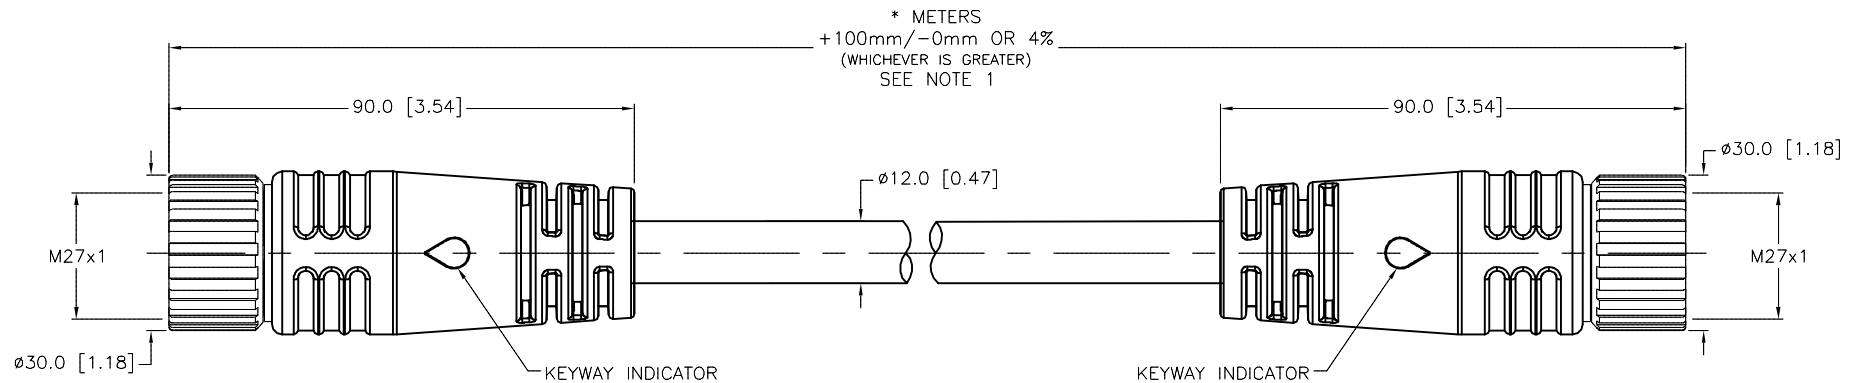

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH.
2. "/S101" DESIGNATES FLEXLIFE-20 AND C-TRACK RATED CABLE.
3. UNUSED CONDUCTORS ARE TRIMMED BACK TO CABLE JACKET ON BOTH ENDS.

RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC <i>High Technology Sensors and Automation Controls</i> 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	DESCRIPTION DSM DKM 26-2067-*/S101
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RDS	DATE	10/09/14
SEE SPECIFICATIONS		APVD	P.J.	SCALE	1=1.5
FINISH		UNIT OF MEASUREMENT		IDENTIFICATION NO.	
SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	MILLIMETER [INCH]		REV	
DO NOT SCALE THIS DRAWING		FILE: 777034098		SHEET 1 OF 1	

B	UPDATE WIRING	NF	03/30/15	48590
REV	DESCRIPTION	BY	DATE	ECO NO.