


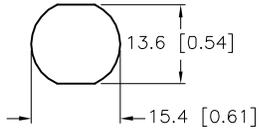


MALE END VIEW	FEMALE END VIEW	TYPICAL PANEL CUTOUT	SPECIFICATIONS	
 <p>1 = N/C 2 = GREEN (BUS_A) 3 = N/C 4 = RED (BUS_B) 5 = BARE (SHIELD)</p>	 <p>1 = N/C 2 = GREEN (BUS_A) 3 = N/C 4 = RED (BUS_B) 5 = BARE (SHIELD)</p>		CONTACT CARRIER MATERIAL	NYLON OR TPU
			MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
		CONTACT MATERIAL/PLATING		BRASS/GOLD
		COUPLING NUT MATERIAL/FINISH		STAINLESS STEEL/PASSIVATED
		RATED CURRENT [A]		4.0 A
		RATED VOLTAGE [V]		250 V
		OUTER JACKET MATERIAL/COLOR		PVC/VIOLET
		CONDUCTOR INSULATION MATERIAL		POLYETHYLENE
		NUMBER OF CONDUCTORS [AWG]		2x22 AWG, 22 AWG DRAIN
		SHIELD		ALUM.-POLYESTER FOIL & TINNED COPPER BRAIDED
		TEMPERATURE RANGE		-40°C to +80°C (-40°F to +176°F)
		PROTECTION CLASS		IEC IP67
		MAX. PANEL THICKNESS		3.0mm [0.12"] (P1), 5.5mm [0.216"] (J1)

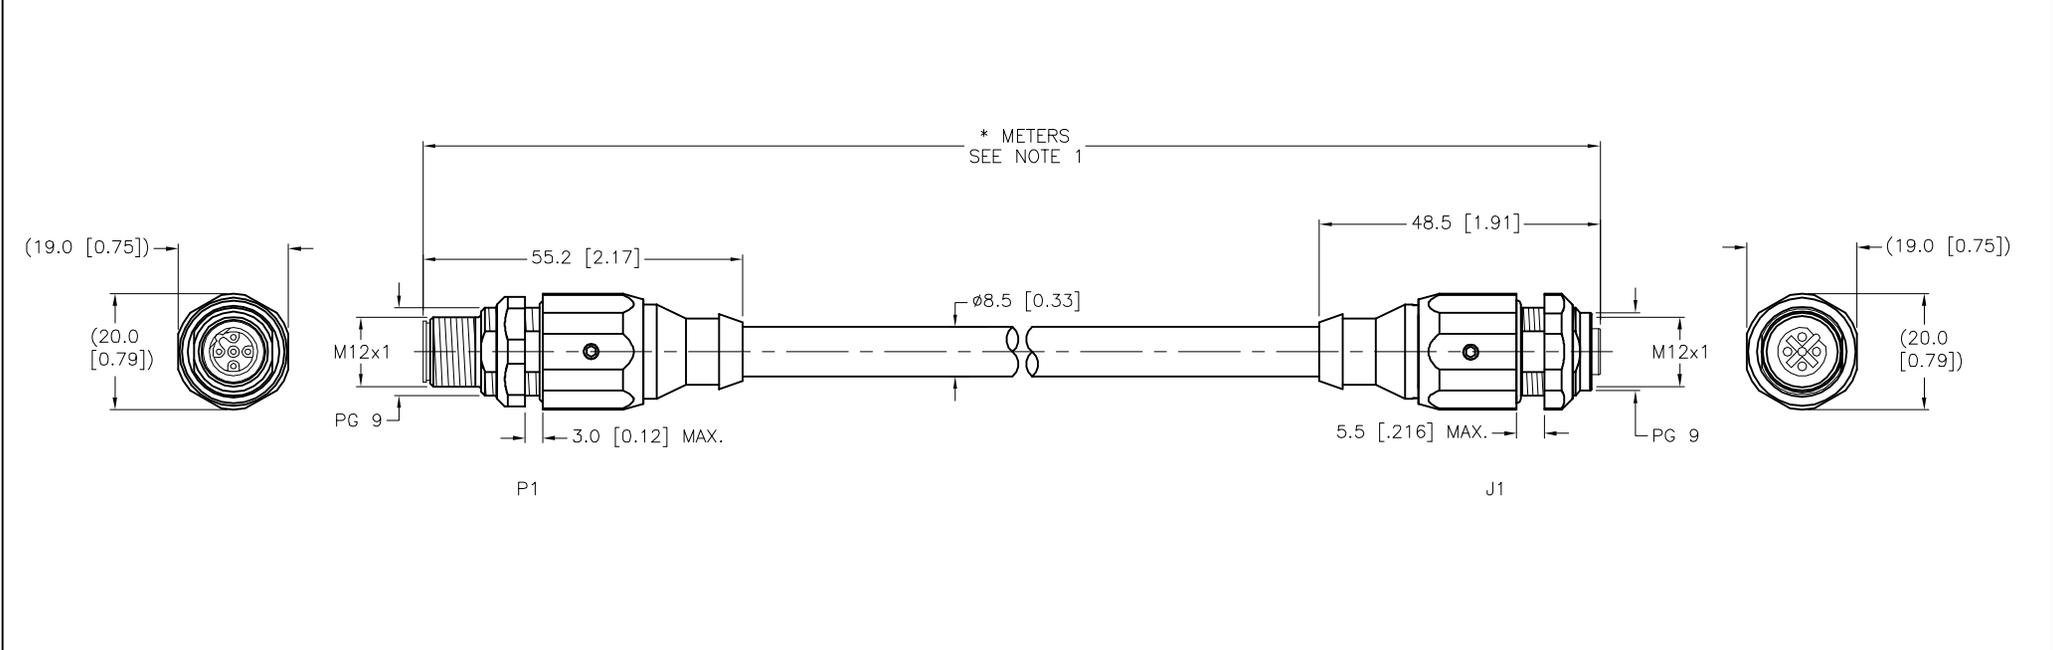


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

*UNLESS OTHERWISE SPECIFIED

NOTES:
1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
		MATERIAL	DRFT RDS APVD	DATE 10/19/09 SCALE 1=1.3	DESCRIPTION FSSDWEV FKSDWEV 455-*M
FINISH	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.	REV D
DO NOT SCALE THIS DRAWING		FILE: 777025414		SHEET 1 OF 1	

D	UPDATE PROTECTION CLASS	NF	10/04/23	79347
REV	DESCRIPTION	BY	DATE	ECO NO.