

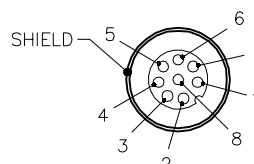

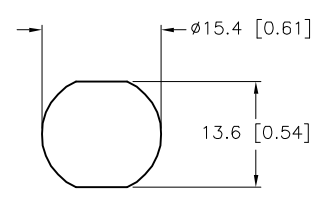
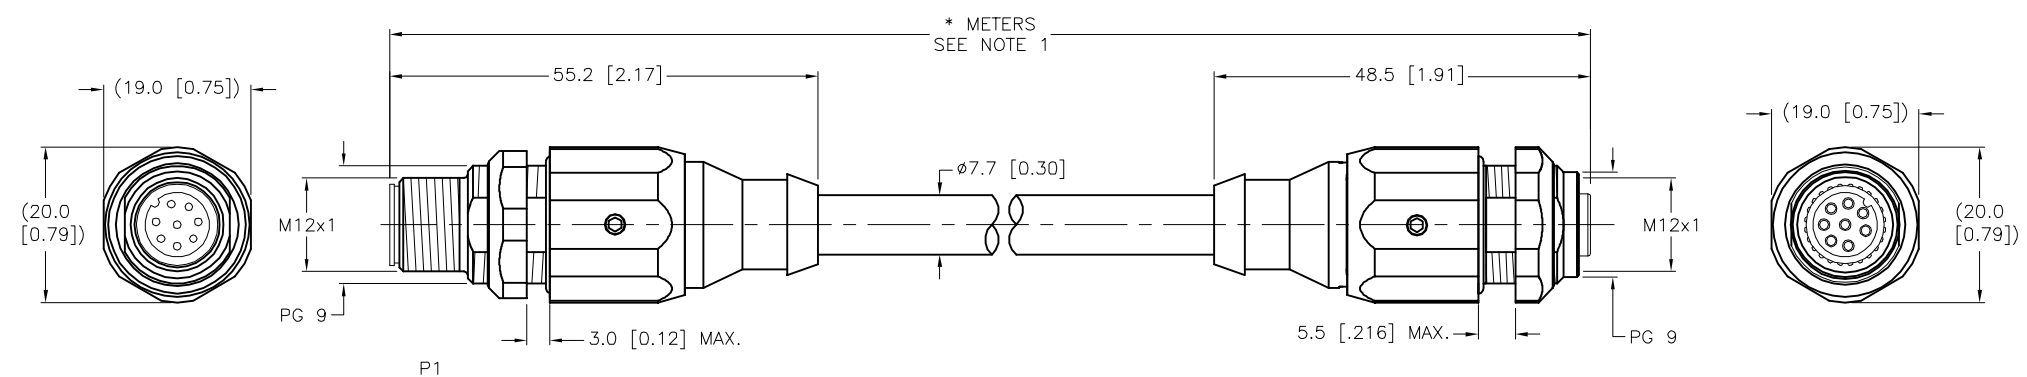





MALE END VIEW	FEMALE END VIEW	MOUNTING HOLE	SPECIFICATIONS	
 1 = WHITE/BBLUE 2 = WHITE/BROWN 3 = BROWN 4 = ORANGE (-TX) 5 = WHITE/GREEN (+RX) 6 = WHITE/ORANGE (+TX) 7 = BLUE 8 = GREEN (-RX) 	 1 = WHITE/BBLUE 2 = WHITE/BROWN 3 = BROWN 4 = ORANGE (-TX) 5 = WHITE/GREEN (+RX) 6 = WHITE/ORANGE (+TX) 7 = BLUE 8 = GREEN (-RX) 		CONTACT CARRIER MATERIAL	NYLON OR TPU
			MOLDED HEAD MATERIAL/COLOR	TPU/BLACK
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	2.0 A
			RATED VOLTAGE [V]	60 V
			OUTER CABLE JACKET MATERIAL/COLOR	TPE/TEAL
			CONDUCTOR INSULATION MATERIAL	HDPE
			NUMBER OF CONDUCTORS [AWG]	4UTPx24 AWG, STRANDED
			SHIELD	ALUM.-POLYESTER FOIL, TINNED-COPPER BRAIDED
			TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)
			PROTECTION CLASS	IEC IP67
			MAX. PANEL THICKNESS	3.0mm [0.12"] (P1), 5.5mm [0.216"] (J1)

																																					
<table><tr><th colspan="2">"841" RAW CABLE SPECIFICATIONS</th></tr><tr><td>CABLE PROPERTIES:</td><td>OIL, UV, WELD SLAG, AND ABRASION RESISTANT</td></tr><tr><td>VOLTAGE RATINGS (MAX):</td><td>600V</td></tr><tr><td>CATEGORY:</td><td>CAT 5e; (CABLE WILL MEET CAT 5e CHANNEL REQUIREMENTS TO 90M LENGTH)</td></tr><tr><td>POE COMPLIANT (802.3af):</td><td>UP TO 80M LENGTH WHEN INSTALLED PER RECOMMENDATIONS IN TIA TSB-184</td></tr><tr><td>FLEXLIFE:</td><td>10X CABLE OD MIN: 1 MILLION CYCLES (TICK TOCK) 20X CABLE OD MIN: 10 MILLION CYCLES (TICK TOCK) TORSION TEST: 3 MILLION CYCLES (1lb LOAD, 360°-71 CYCLES/min)</td></tr><tr><td>APPROVALS:</td><td>C(UL)US CMX-OUTDOOR-CM LISTED, AWM RECOGNIZED COMPLIANT WITH NEC ARTICLE 800 COMMUNICATIONS CABLES</td></tr></table>		"841" RAW CABLE SPECIFICATIONS		CABLE PROPERTIES:	OIL, UV, WELD SLAG, AND ABRASION RESISTANT	VOLTAGE RATINGS (MAX):	600V	CATEGORY:	CAT 5e; (CABLE WILL MEET CAT 5e CHANNEL REQUIREMENTS TO 90M LENGTH)	POE COMPLIANT (802.3af):	UP TO 80M LENGTH WHEN INSTALLED PER RECOMMENDATIONS IN TIA TSB-184	FLEXLIFE:	10X CABLE OD MIN: 1 MILLION CYCLES (TICK TOCK) 20X CABLE OD MIN: 10 MILLION CYCLES (TICK TOCK) TORSION TEST: 3 MILLION CYCLES (1lb LOAD, 360°-71 CYCLES/min)	APPROVALS:	C(UL)US CMX-OUTDOOR-CM LISTED, AWM RECOGNIZED COMPLIANT WITH NEC ARTICLE 800 COMMUNICATIONS CABLES																						
"841" RAW CABLE SPECIFICATIONS																																					
CABLE PROPERTIES:	OIL, UV, WELD SLAG, AND ABRASION RESISTANT																																				
VOLTAGE RATINGS (MAX):	600V																																				
CATEGORY:	CAT 5e; (CABLE WILL MEET CAT 5e CHANNEL REQUIREMENTS TO 90M LENGTH)																																				
POE COMPLIANT (802.3af):	UP TO 80M LENGTH WHEN INSTALLED PER RECOMMENDATIONS IN TIA TSB-184																																				
FLEXLIFE:	10X CABLE OD MIN: 1 MILLION CYCLES (TICK TOCK) 20X CABLE OD MIN: 10 MILLION CYCLES (TICK TOCK) TORSION TEST: 3 MILLION CYCLES (1lb LOAD, 360°-71 CYCLES/min)																																				
APPROVALS:	C(UL)US CMX-OUTDOOR-CM LISTED, AWM RECOGNIZED COMPLIANT WITH NEC ARTICLE 800 COMMUNICATIONS CABLES																																				
<table><tr><th>CABLE LENGTH</th><th>TOLERANCE*</th></tr><tr><td>ALL LENGTHS</td><td>+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER</td></tr><tr><th>STRIP LENGTH</th><th>TOLERANCE*</th></tr><tr><td>0-7mm</td><td>±0.5mm</td></tr><tr><td>8-29mm</td><td>±1.0mm</td></tr><tr><td>30-49mm</td><td>±2.0mm</td></tr><tr><td>50-69mm</td><td>±3.0mm</td></tr><tr><td>70-100mm</td><td>±4.0mm</td></tr><tr><td>OVER 100mm</td><td>±5.0mm</td></tr></table> <p>*UNLESS OTHERWISE SPECIFIED</p>		CABLE LENGTH	TOLERANCE*	ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER	STRIP LENGTH	TOLERANCE*	0-7mm	±0.5mm	8-29mm	±1.0mm	30-49mm	±2.0mm	50-69mm	±3.0mm	70-100mm	±4.0mm	OVER 100mm	±5.0mm																		
CABLE LENGTH	TOLERANCE*																																				
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER																																				
STRIP LENGTH	TOLERANCE*																																				
0-7mm	±0.5mm																																				
8-29mm	±1.0mm																																				
30-49mm	±2.0mm																																				
50-69mm	±3.0mm																																				
70-100mm	±4.0mm																																				
OVER 100mm	±5.0mm																																				
<p>NOTES:</p> <p>1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.</p>																																					
<table><tr><td rowspan="2">RELATED DOCUMENTS</td><td rowspan="2">3RD ANGLE PROJECTION</td><td rowspan="2">THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</td><td rowspan="2"></td><td colspan="2">3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</td></tr><tr></tr><tr><td rowspan="2">MATERIAL</td><td rowspan="2">ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</td><td>DRFT</td><td>RDS</td><td>DATE</td><td>03/16/09</td></tr><tr><td>APVD</td><td></td><td>SCALE</td><td>1=1.0</td></tr><tr><td rowspan="2">FINISH</td><td rowspan="3">CONTACT TURCK FOR MORE INFORMATION</td><td colspan="2">UNIT OF MEASUREMENT</td><td colspan="2">IDENTIFICATION NO.</td></tr><tr><td colspan="2">MILLIMETER [INCH]</td><td colspan="2">REV</td></tr><tr><td colspan="2">DO NOT SCALE THIS DRAWING</td><td colspan="2">J</td></tr><tr><td colspan="2"></td><td colspan="2">FILE: 777024144</td><td colspan="2">SHEET 1 OF 1</td></tr></table>		RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RDS	DATE	03/16/09	APVD		SCALE	1=1.0	FINISH	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT		IDENTIFICATION NO.		MILLIMETER [INCH]		REV		DO NOT SCALE THIS DRAWING		J				FILE: 777024144		SHEET 1 OF 1	
RELATED DOCUMENTS	3RD ANGLE PROJECTION					THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us																											
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RDS	DATE	03/16/09																																
		APVD		SCALE	1=1.0																																
FINISH	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT		IDENTIFICATION NO.																																	
		MILLIMETER [INCH]		REV																																	
DO NOT SCALE THIS DRAWING		J																																			
		FILE: 777024144		SHEET 1 OF 1																																	