

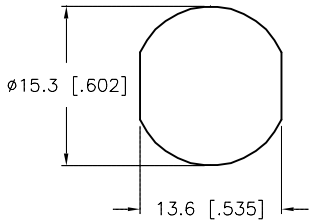
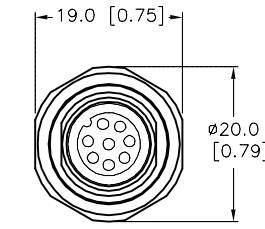
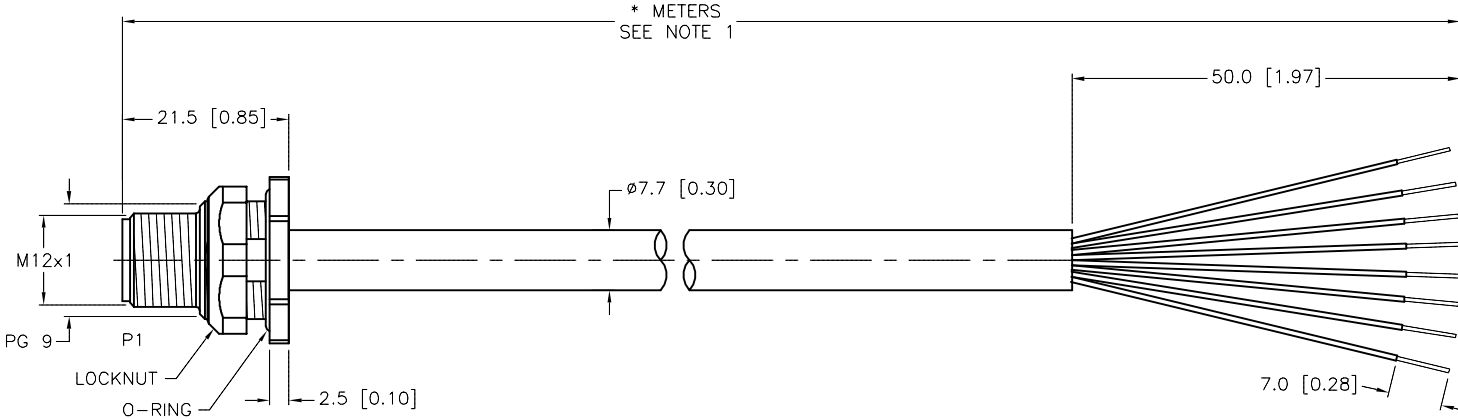








SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON OR TPU
MOLDED HEAD MATERIAL/CLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	2.0 A
RATED VOLTAGE [V]	60 V
OUTER CABLE JACKET MATERIAL/COLOR	TPE/TEAL
CONDUCTOR INSULATION MATERIAL	HDPE
NUMBER OF CONDUCTORS [AWG]	4UTP×24 AWG, STRANDED
SHIELDING	ALUM.-POLYESTER FOIL, TINNED-COPPER BRAIDED
TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP68
MAX. PANEL THICKNESS	3.0 [.12]

MALE END VIEW	TYPICAL PANEL CUTOUT
 <p>1 = WHITE/BLUE 2 = WHITE/BROWN 3 = BROWN 4 = ORANGE (-TX) 5 = WHITE/GREEN (+RX) 6 = WHITE/ORANGE (+TX) 7 = BLUE 8 = GREEN (-RX)</p> 	

 <p>END VIEW LOCKNUT NOT SHOWN</p>		 <p>* METERS SEE NOTE 1</p>																																			
<table><tr><th>CABLE LENGTH</th><th>TOLERANCE*</th></tr><tr><td>ALL LENGTHS</td><td>+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER</td></tr><tr><th>STRIP LENGTH</th><th>TOLERANCE*</th></tr><tr><td>0-7mm</td><td>±0.5mm</td></tr><tr><td>8-29mm</td><td>±1.0mm</td></tr><tr><td>30-49mm</td><td>±2.0mm</td></tr><tr><td>50-69mm</td><td>±3.0mm</td></tr><tr><td>70-100mm</td><td>±4.0mm</td></tr><tr><td>OVER 100mm</td><td>±5.0mm</td></tr><tr><td colspan="2">* UNLESS OTHERWISE SPECIFIED</td></tr></table>		CABLE LENGTH	TOLERANCE*	ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER	STRIP LENGTH	TOLERANCE*	0-7mm	±0.5mm	8-29mm	±1.0mm	30-49mm	±2.0mm	50-69mm	±3.0mm	70-100mm	±4.0mm	OVER 100mm	±5.0mm	* UNLESS OTHERWISE SPECIFIED		<table><tr><th colspan="2">"841" RAW CABLE SPECIFICATIONS</th></tr><tr><td>CABLE PROPERTIES:</td><td>OIL, UV, WELD SLAG, AND ABRASION RESISTANT</td></tr><tr><td>VOLTAGE RATINGS (MAX):</td><td>600V</td></tr><tr><td>CATEGORY:</td><td>CAT 5e; (CABLE WILL MEET CAT 5e CHANNEL REQUIREMENTS TO 90M LENGTH)</td></tr><tr><td>POE COMPLIANT (802.3af):</td><td>UP TO 80M LENGTH WHEN INSTALLED PER RECOMMENDATIONS IN TIA TSB-184</td></tr><tr><td>FLEXLIFE:</td><td>10X CABLE OD MIN: 1 MILLION CYCLES (TICK TOCK) 20X CABLE OD MIN: 10 MILLION CYCLES (TICK TOCK) TORSION TEST: 3 MILLION CYCLES (1lb LOAD, 360°-71 CYCLES/min)</td></tr><tr><td>APPROVALS:</td><td>C(UL)US CMX-OUTDOOR-CM LISTED, AWM RECOGNIZED COMPLIANT WITH NEC ARTICLE 800 COMMUNICATIONS CABLES</td></tr></table>		"841" RAW CABLE SPECIFICATIONS		CABLE PROPERTIES:	OIL, UV, WELD SLAG, AND ABRASION RESISTANT	VOLTAGE RATINGS (MAX):	600V	CATEGORY:	CAT 5e; (CABLE WILL MEET CAT 5e CHANNEL REQUIREMENTS TO 90M LENGTH)	POE COMPLIANT (802.3af):	UP TO 80M LENGTH WHEN INSTALLED PER RECOMMENDATIONS IN TIA TSB-184	FLEXLIFE:	10X CABLE OD MIN: 1 MILLION CYCLES (TICK TOCK) 20X CABLE OD MIN: 10 MILLION CYCLES (TICK TOCK) TORSION TEST: 3 MILLION CYCLES (1lb LOAD, 360°-71 CYCLES/min)	APPROVALS:	C(UL)US CMX-OUTDOOR-CM LISTED, AWM RECOGNIZED COMPLIANT WITH NEC ARTICLE 800 COMMUNICATIONS CABLES
CABLE LENGTH	TOLERANCE*																																				
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER																																				
STRIP LENGTH	TOLERANCE*																																				
0-7mm	±0.5mm																																				
8-29mm	±1.0mm																																				
30-49mm	±2.0mm																																				
50-69mm	±3.0mm																																				
70-100mm	±4.0mm																																				
OVER 100mm	±5.0mm																																				
* UNLESS OTHERWISE SPECIFIED																																					
"841" RAW CABLE SPECIFICATIONS																																					
CABLE PROPERTIES:	OIL, UV, WELD SLAG, AND ABRASION RESISTANT																																				
VOLTAGE RATINGS (MAX):	600V																																				
CATEGORY:	CAT 5e; (CABLE WILL MEET CAT 5e CHANNEL REQUIREMENTS TO 90M LENGTH)																																				
POE COMPLIANT (802.3af):	UP TO 80M LENGTH WHEN INSTALLED PER RECOMMENDATIONS IN TIA TSB-184																																				
FLEXLIFE:	10X CABLE OD MIN: 1 MILLION CYCLES (TICK TOCK) 20X CABLE OD MIN: 10 MILLION CYCLES (TICK TOCK) TORSION TEST: 3 MILLION CYCLES (1lb LOAD, 360°-71 CYCLES/min)																																				
APPROVALS:	C(UL)US CMX-OUTDOOR-CM LISTED, AWM RECOGNIZED COMPLIANT WITH NEC ARTICLE 800 COMMUNICATIONS CABLES																																				
NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.		SOURCE DRAWING - FOR REFERENCE ONLY																																			
<table><tr><td rowspan="2">RELATED DOCUMENTS 1. 2. 3. 4.</td><td rowspan="2">3RD ANGLE PROJECTION </td><td rowspan="2">THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</td><td rowspan="2"><p>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</p></td></tr><tr></tr><tr><td rowspan="2">MATERIAL</td><td rowspan="2">ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</td><td>DRFT NF</td><td>DATE 05/18/15</td></tr><tr><td>APVD L.H.</td><td>SCALE 1=1.0</td></tr><tr><td rowspan="2">FINISH</td><td rowspan="4">CONTACT TURCK FOR MORE INFORMATION</td><td colspan="2">UNIT OF MEASUREMENT MILLIMETER [INCH]</td></tr><tr><td colspan="2">DO NOT SCALE THIS DRAWING</td></tr><tr><td colspan="2">DESCRIPTION FSFD 841-*M</td><td colspan="2">IDENTIFICATION NO. REV B</td></tr><tr><td colspan="2">FILE: 777035490</td><td colspan="2">SHEET 1 OF 1</td></tr></table>		RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	 <p>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</p>	MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT NF	DATE 05/18/15	APVD L.H.	SCALE 1=1.0	FINISH	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]		DO NOT SCALE THIS DRAWING		DESCRIPTION FSFD 841-*M		IDENTIFICATION NO. REV B		FILE: 777035490		SHEET 1 OF 1		<table><tr><td>B</td><td>UPDATE EUROFAST</td><td>NF</td><td>01/18/16</td><td>53130</td></tr><tr><td>REV</td><td>DESCRIPTION</td><td>BY</td><td>DATE</td><td>ECO NO.</td></tr></table>		B	UPDATE EUROFAST	NF	01/18/16	53130	REV	DESCRIPTION	BY	DATE	ECO NO.
RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 							THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	 <p>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</p>																												
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT NF	DATE 05/18/15																																		
		APVD L.H.	SCALE 1=1.0																																		
FINISH	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]																																			
		DO NOT SCALE THIS DRAWING																																			
DESCRIPTION FSFD 841-*M		IDENTIFICATION NO. REV B																																			
FILE: 777035490		SHEET 1 OF 1																																			
B	UPDATE EUROFAST	NF	01/18/16	53130																																	
REV	DESCRIPTION	BY	DATE	ECO NO.																																	