
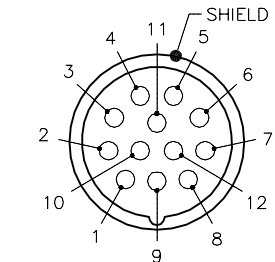
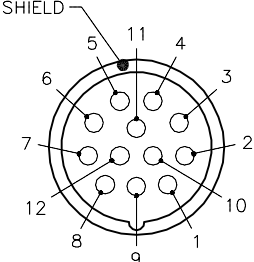
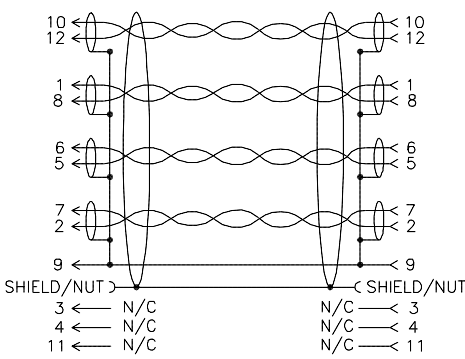
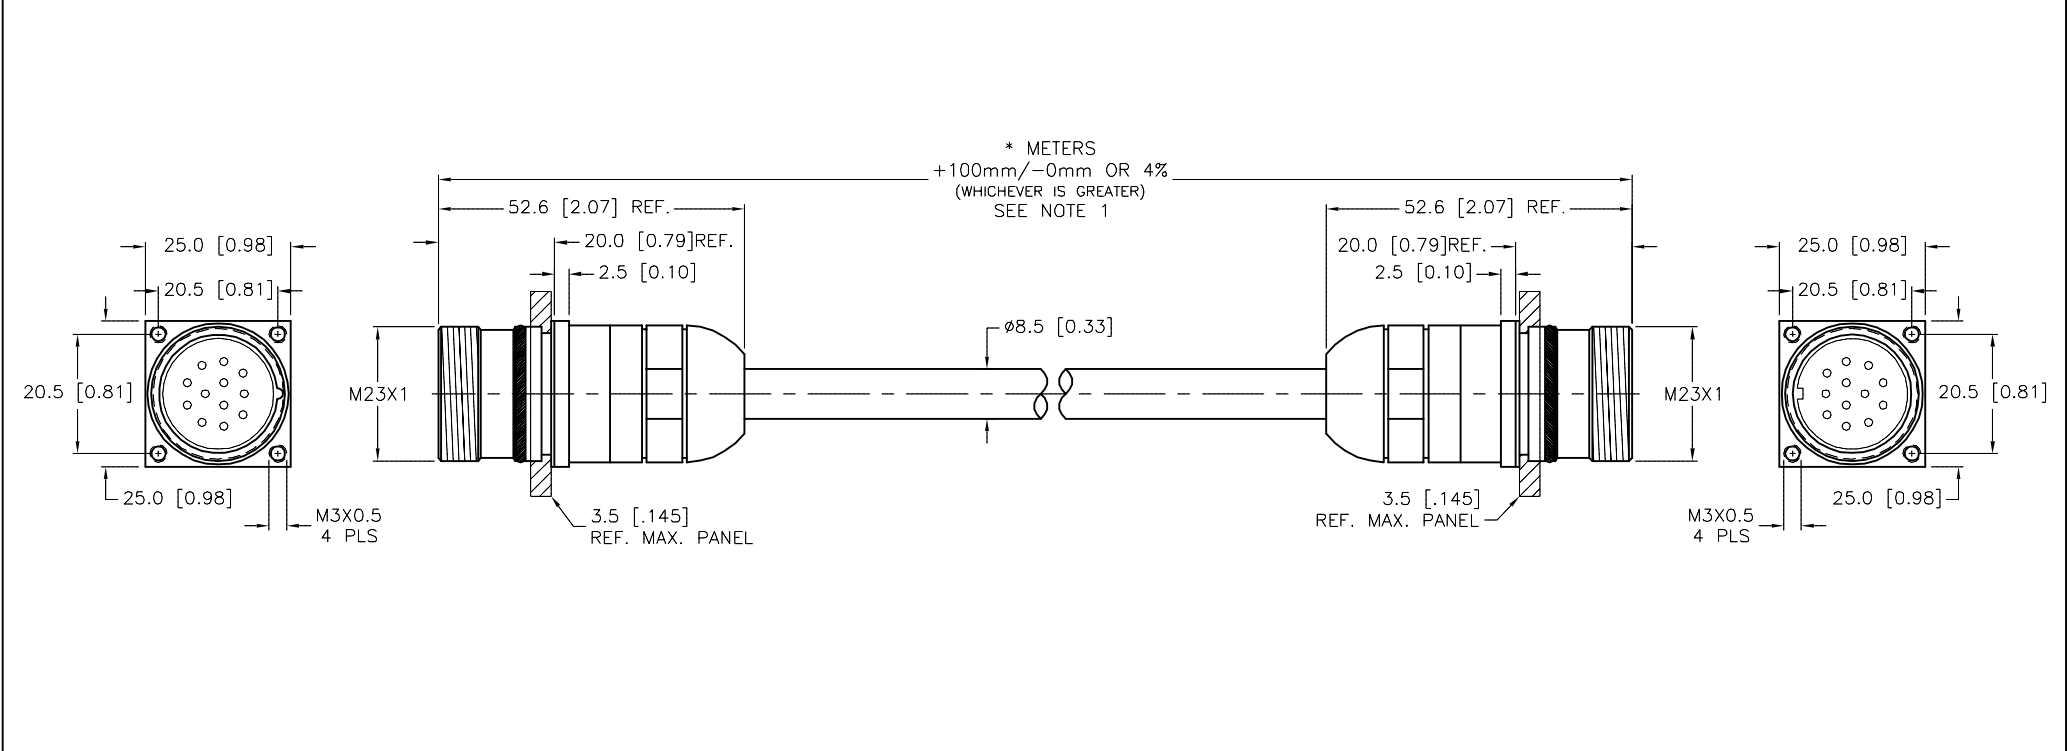


MALE END VIEW	FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
 <p>1 = BLACK 2 = BLUE 3 = N/C 4 = N/C 5 = GREEN 6 = BLACK 7 = BLACK 8 = WHITE 9 = DRAIN 10 = BLACK 11 = N/C 12 = RED</p>		 <p>SHIELD/NUT &lt; 3 ← N/C 4 ← N/C 11 ← N/C</p> <p>N/C &lt; 3 N/C &lt; 4 N/C &lt; 11</p>	CONTACT CARRIER MATERIAL	NYLON or PBT
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			HOUSING MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	6.0 A
			RATED VOLTAGE [V]	300 V
			OUTER JACKET MATERIAL/COLOR	PVC/GREY
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBER OF CONDUCTORS [AWG]	8x20 AWG, 4x SHIELDED TWISTED PAIR
			DRAIN/SHIELD	22 AWG TC COMMON DRAIN/FOIL SHIELD
			BRAIDED SHIELD	36 AWG BRAIDED SHIELD
			TEMPERATURE RANGE	-40°C to +80°C (-40°F to +176°F)
			PROTECTION CLASS	IEC IP67



SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS. 2. PANEL BORE 23mm +0.1. MAXIMUM PANEL THICKNESS 3.5 [.145].				RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION 		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
MATERIAL SEE SPECIFICATIONS				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT JBU DATE 01/17/03		DESCRIPTION CSSFDF CKSFDF 12-9-987-*		IDENTIFICATION NO.	
FINISH SEE SPECIFICATIONS				CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT <b>MILLIMETER [ INCH ]</b>		DO NOT SCALE THIS DRAWING		REV B	
RDS 07/28/04 11762				BY DATE ECO NO.		FILE: 777001885		SHEET 1 OF 1			