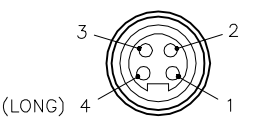

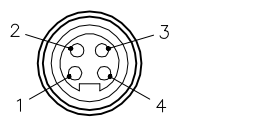

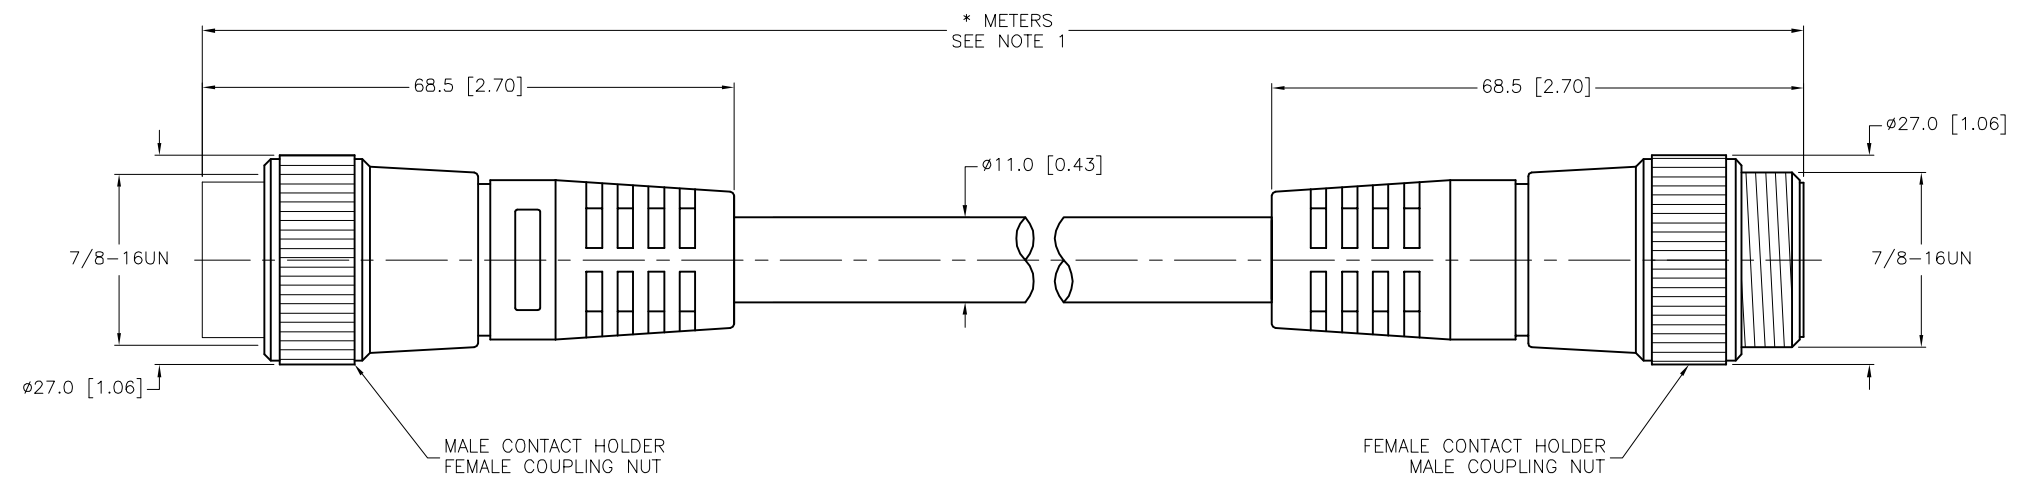








SPECIFICATIONS	
CONTACT CARRIER MATERIAL	TPU
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	10.0 A
RATED VOLTAGE [V]	600 V
OUTER CABLE JACKET MATERIAL/COLOR	CPE/YELLOW
CONDUCTOR INSULATION MATERIAL	EPDM
NUMBER OF CONDUCTORS [AWG]	4x16 AWG
TEMPERATURE RANGE	-50°C to +105°C (-58°F to +221°F)
PROTECTION CLASS	NEMA 1,3,4,6P,12 & IECIP67, IP68,IP69,IP69K

MALE END VIEW	FEMALE END VIEW
 <p>(LONG)</p> <p>1 = BLACK 2 = WHITE 3 = RED 4 = GREEN/YELLOW</p> 	 <p>1 = BLACK 2 = WHITE 3 = RED 4 = GREEN/YELLOW</p> 

 <p>* METERS SEE NOTE 1</p> <p>68.5 [2.70]</p> <p>7/8-16UN</p> <p>27.0 [1.06]</p> <p>MALE CONTACT HOLDER FEMALE COUPLING NUT</p> <p>68.5 [2.70]</p> <p>7/8-16UN</p> <p>27.0 [1.06]</p> <p>FEMALE CONTACT HOLDER MALE COUPLING NUT</p> <p>11.0 [0.43]</p>																																																																		
<table><tr><th>CABLE LENGTH</th><th>TOLERANCE*</th></tr><tr><td>ALL LENGTHS</td><td>+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER</td></tr><tr><th>STRIP LENGTH</th><th>TOLERANCE*</th></tr><tr><td>0-7mm</td><td>±0.5mm</td></tr><tr><td>8-29mm</td><td>±1.0mm</td></tr><tr><td>30-49mm</td><td>±2.0mm</td></tr><tr><td>50-69mm</td><td>±3.0mm</td></tr><tr><td>70-100mm</td><td>±4.0mm</td></tr><tr><td>OVER 100mm</td><td>±5.0mm</td></tr></table> <p>*UNLESS OTHERWISE SPECIFIED</p>					CABLE LENGTH	TOLERANCE*	ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER	STRIP LENGTH	TOLERANCE*	0-7mm	±0.5mm	8-29mm	±1.0mm	30-49mm	±2.0mm	50-69mm	±3.0mm	70-100mm	±4.0mm	OVER 100mm	±5.0mm																																												
CABLE LENGTH	TOLERANCE*																																																																	
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER																																																																	
STRIP LENGTH	TOLERANCE*																																																																	
0-7mm	±0.5mm																																																																	
8-29mm	±1.0mm																																																																	
30-49mm	±2.0mm																																																																	
50-69mm	±3.0mm																																																																	
70-100mm	±4.0mm																																																																	
OVER 100mm	±5.0mm																																																																	
<p>NOTES:</p> <p>1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.</p> <p>2. "/S600" DESIGNATES HEAVY DUTY RUBBER JACKET AND CONDUCTOR INSULATION.</p>																																																																		
<table><tr><td colspan="2">RELATED DOCUMENTS</td><td colspan="2">3RD ANGLE PROJECTION</td><td colspan="2">THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</td><td colspan="2"></td><td colspan="2">3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</td></tr><tr><td colspan="2">1.</td><td colspan="2" rowspan="2"></td><td colspan="2">DRFT KMY</td><td colspan="2">DATE 07/11/12</td><td colspan="2" rowspan="2">DESCRIPTION RYM RXM 46-*M/S600</td></tr><tr><td colspan="2">2.</td><td colspan="2">APVD E.S.</td><td colspan="2">SCALE 1=1.0</td></tr><tr><td colspan="2">3.</td><td colspan="2" rowspan="2">ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</td><td colspan="4">UNIT OF MEASUREMENT MILLIMETER [INCH]</td><td colspan="2" rowspan="2">IDENTIFICATION NO.</td></tr><tr><td colspan="2">4.</td><td colspan="4">CONTACT TURCK FOR MORE INFORMATION</td></tr><tr><td colspan="2">MATERIAL</td><td colspan="2">SEE SPECIFICATIONS</td><td colspan="4">DO NOT SCALE THIS DRAWING</td><td colspan="2">REV C</td></tr><tr><td colspan="2">FINISH</td><td colspan="2">SEE SPECIFICATIONS</td><td colspan="4">FILE: 777029421</td><td colspan="2">SHEET 1 OF 1</td></tr></table>					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		1.				DRFT KMY		DATE 07/11/12		DESCRIPTION RYM RXM 46-*M/S600		2.		APVD E.S.		SCALE 1=1.0		3.		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.		4.		CONTACT TURCK FOR MORE INFORMATION				MATERIAL		SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING				REV C		FINISH		SEE SPECIFICATIONS		FILE: 777029421				SHEET 1 OF 1	
RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us																																																										
1.				DRFT KMY		DATE 07/11/12		DESCRIPTION RYM RXM 46-*M/S600																																																										
2.				APVD E.S.		SCALE 1=1.0																																																												
3.		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO.																																																										
4.				CONTACT TURCK FOR MORE INFORMATION																																																														
MATERIAL		SEE SPECIFICATIONS		DO NOT SCALE THIS DRAWING				REV C																																																										
FINISH		SEE SPECIFICATIONS		FILE: 777029421				SHEET 1 OF 1																																																										
C	UPDATE PROTECTION CLASS	CBM	04/13/21	76628																																																														
REV	DESCRIPTION	BY	DATE	ECO NO.																																																														