


MALE END VIEW



A = BROWN
 B = TAN
 C = BLUE
 D = YELLOW/BROWN
 E = GREEN
 F = WHITE/YELLOW
 G = PINK
 H = BROWN/GREEN
 J = BLACK
 K = WHITE/GREEN
 L = RED/BLUE
 M = GREY/PINK
 N = ORANGE
 P = GREY
 R = RED
 S = WHITE
 T = VIOLET
 U = GREY/BROWN
 V = YELLOW

CONNECTOR


TYPE/STYLE - MS 3118M

SHELL SIZE - 14

INSERT ARRANGEMENT - 19P

SPECIFICATIONS



CONTACT CARRIER MATERIAL	NEOPRENE
MOLDED HEAD MATERIAL/COLOR	PVC/BLACK
CONTACT MATERIAL/PLATING	COPPER ALLOY/GOLD
COUPLING NUT MATERIAL/PLATING	ALUMINUM ALLOY/OLIVE DRAB CHROMATE
MOLD SLEEVE	ALUMINUM/BLACK ANODIZED
RATED CURRENT [A]	2.0 A
RATED VOLTAGE [V]	300 V
OUTER JACKET MATERIAL/COLOR	PVC/BLACK
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS	19x22 AWG
DRAIN/SHIELD	24 AWG/ALUM.-POLYESTER FOIL
TEMPERATURE RATING	-40°C TO +105°C (-40°F TO +221°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67, IP68
CONNECTOR TYPE	MIL-DTL-26482

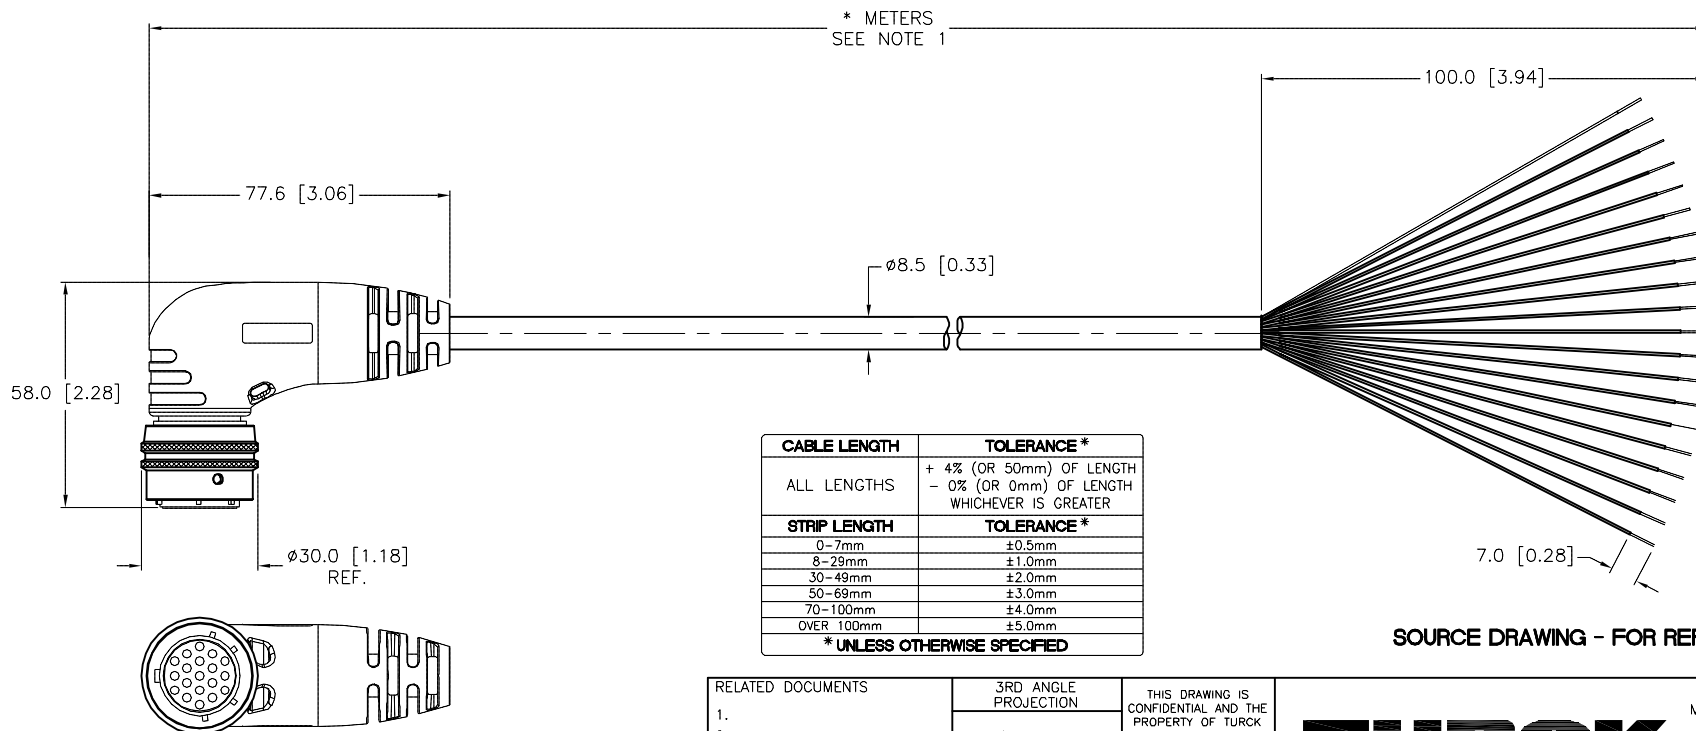

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTH.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.				3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us		
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	NF	DATE	09/30/15		DESCRIPTION MS 3118M-14-19P-0995-*		
FINISH SEE SPECIFICATIONS		APVD		SCALE	1=2.0				
		CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]			IDENTIFICATION NO.			REV A
		DO NOT SCALE THIS DRAWING			FILE: 777035049				

A	DRAWING RELEASE	TR	12/19/18	
REV	DESCRIPTION	BY	DATE	ECO. NO.