



Product designation	Power contactor		
Product type designation	BGP09		
Contact characteristics			
Number of poles	Nr.	3	
Rated insulation voltage U_i IEC/EN	V	500	
Rated impulse withstand voltage U_{imp}	kV	6	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current I_{th}	A	20	
Operational current I_e			
AC-1 ($\leq 40^\circ C$)	A	20	
AC-1 ($\leq 55^\circ C$)	A	18	
AC-1 ($\leq 70^\circ C$)	A	15	
AC-3 ($\leq 440V \leq 55^\circ C$)	A	9	
AC-4 (400V)	A	4	
Rated operational power AC-3 ($T \leq 55^\circ C$)	230V	kW	2.2
	400V	kW	4
	415V	kW	4.3
	440V	kW	4.5
	500V	kW	5
Rated operational power AC-1 ($T \leq 40^\circ C$)	230V	kW	8
	400V	kW	14
	500V	kW	16
Short-time allowable current for 10s (IEC/EN60947-1)	A	96	
Protection fuse			
gG (IEC)	A	20	
aM (IEC)	A	10	
Making capacity (RMS value)	A	92	
Breaking capacity at voltage			
440V	A	72	
500V	A	72	
Resistance per pole (average value)	mΩ		
Power dissipation per pole (average value)	I _{th}	W	4
	AC-3	W	0.81
Tightening torque for terminals	min	Nm	0.8
	max	Nm	1
	min	I _{bin}	9
	max	I _{bin}	9
Tightening torque for coil terminal	min	Nm	0.8

	max	Nm	1
	min	Ibin	9
	max	Ibin	9
Max number of wires simultaneously connectable	Nr. 2		
Conductor section			
AWG/Kcmil	max	12	
Flexible w/o lug conductor section	min	mm ²	0.8
	max	mm ²	2.5
Flexible c/w lug conductor section	min	mm ²	1.5
	max	mm ²	2.5
Flexible with insulated spade lug conductor section	min	mm ²	1.5
	max	mm ²	2.5
Power terminal protection according to IEC/EN 60529	IP00		
Mechanical features			
Operating position	normal	Vertical plan	
	allowable	±30°	
Fixing	Screw / DIN rail 35mm		
Weight	g	243	
Auxiliary contact characteristics			
Thermal current Ith	A	10	
IEC/EN 60947-5-1 designation	A600 - Q600		
Operating current AC15			
	230V	A	3
	400V	A	1.9
	500V	A	1.4
Operating current DC12	110V	A	2.9
Operating current DC13			
	24V	A	2.9
	48V	A	1.4
	60V	A	1.1
	125V	A	0.3
	220V	A	0.1
	600V	A	0.6
Operations			
Mechanical life	cycles	20000000	
Electrical life	cycles	500000	
Safety related data			
Performance level B10d according to EN/ISO 13489-1			
	rated load	cycles	500000
	mechanical load	cycles	20000000
Mirror contacts according to IEC/EN 609474-4-1	Yes		
EMC compatibility	yes		
DC coil operating			
DC rated control voltage	V	24	
DC operating voltage	pick-up		

	min	%Us	75
	max	%Us	115
drop-out			
	min	%Us	10
	max	%Us	25
Average coil consumption $\leq 20^{\circ}\text{C}$			
	in-rush	W	3.2
	holding	W	3.2
Max cycles frequency			
Mechanical operation		cycles/h	3600
Operating times			
Average time for Us control			
in AC			
Closing NO			
min	ms	12	
max	ms	21	
Opening NO			
min	ms	9	
max	ms	18	
Closing NC			
min	ms	17	
max	ms	26	
Opening NC			
min	ms	7	
max	ms	17	
in DC			
Closing NO			
min	ms	18	
max	ms	25	
Opening NO			
min	ms	2	
max	ms	3	
Closing NC			
min	ms	3	
max	ms	5	
Opening NC			
min	ms	11	
max	ms	17	
UL technical data			
Full-load current (FLA) for three-phase AC motor			
	at 480V	A	7.6
	at 600V	A	6.1
Yielded mechanical performance			
for single-phase AC motor			
	110/120V	HP	0.5
	230V	HP	1.5
for three-phase AC motor			
	200/208V	HP	2
	220/230V	HP	3
	460/480V	HP	5
	575/600V	HP	5
General USE			
Contactor			
	AC current	A	20

Contact rating of auxiliary contacts according to UL

A600 - Q600

Ambient conditions

Temperature

Operating temperature

	min	°C	-50
	max	°C	+70

Storage temperature

	min	°C	-60
	max	°C	+80

Max altitude


m 3000

Resistance & Protection

Pollution degree


3

Dimensions

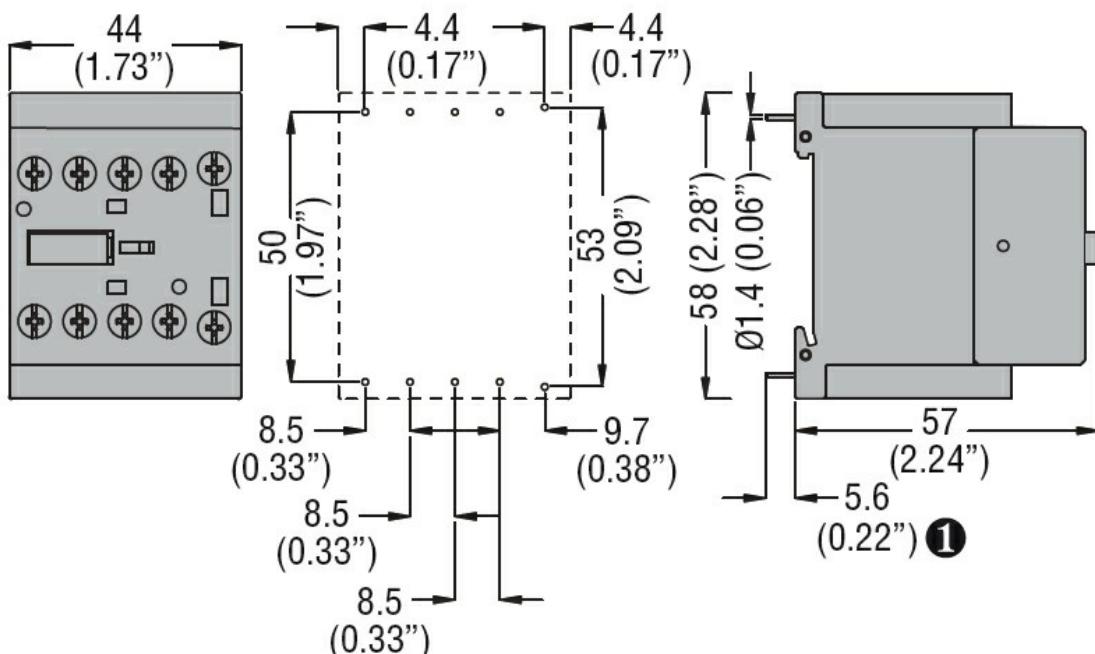

① Recommended PCB drillings 1.7-2mm.

Wiring diagrams

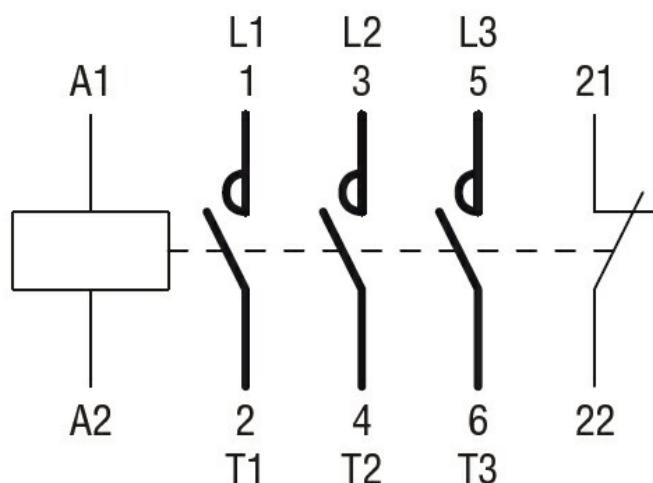

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

cURus

EAC

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching