



Product designation	Auxiliary contact		
Product type designation	11BGX10		
Contact characteristics			
Number of poles	Nr.	4	
Rated insulation voltage Ui IEC/EN	V	690	
Rated impulse withstand voltage Uimp	kV	6	
IEC Conventional free air thermal current Ith	A	10	
Tightening torque for terminals	min	Nm	0.8
	max	Nm	1
	min	Ibin	9
	max	Ibin	9
Tightening torque for coil terminal	min	Ibin	9
	max	Ibin	9
Max number of wires simultaneously connectable	Nr.	2	
Conductor section			
AWG/Kcmil	max		12
Flexible w/o lug conductor section	min	mm ²	0.75
	max	mm ²	2.5
Flexible c/w lug conductor section	min	mm ²	0.75
	max	mm ²	2.5
Flexible with insulated spade lug conductor section	min	mm ²	0.75
	max	mm ²	2.5
Mechanical features			
Operating position	normal allowable		On vertical plane Any
Fixing			Front centre mounting
Weight	g	28	
Terminals screw			Screw
Auxiliary contact characteristics			
Type of contact			3NO +1 NC
Thermal current Ith	A	10	
IEC/EN 60947-5-1 designation			A600 - Q600
Operating current AC15	230V	A	3
	400V	A	1.9
	500V	A	1.4
Operating current DC13			

24V	A	3
48V	A	1.5
60V	A	1.2
110V	A	0.6
125V	A	0.55
220V	A	0.27
600V	A	0.1

Electrical characteristics

Conductivity	5V 10 mA		
UL/CSA and IEC/EN 60947-5-1 designation	A600 Q600		
Operating current AC15	120V	A	6
	240V	A	3
	480V	A	1.5
	600V	A	1.2

Operating current DC13

12V	A	10
250V	A	0.27
440V	A	0.15
500V	A	0.13

UL technical data

Rated operational voltage AC (UL)	V	600
-----------------------------------	---	-----

Ambient conditions


Temperature

Operating temperature	min	°C	-50
	max	°C	+70
Storage temperature	min	°C	-60
	max	°C	+80


Max altitude

m 3000

Dimensions

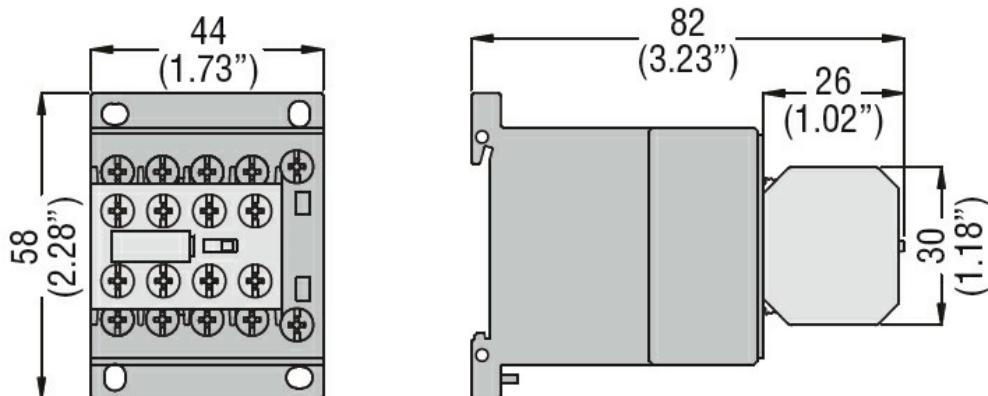

Wiring diagrams

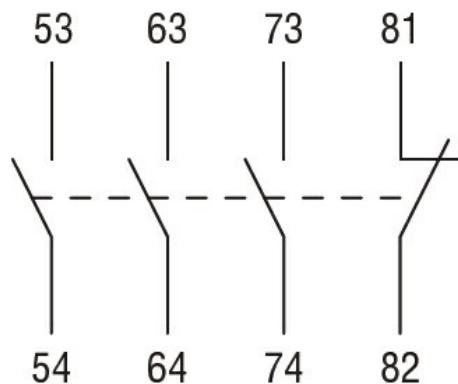

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-5-1

IEC/EN 60947-1

IEC/EN 60947-5-1

UL 60947-1

UL 60947-5-1

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000041 -
Auxiliary contact
block