





Product designation	Auxiliary contact										
Product type designation	11G482										
Contact characteristics											
Number of poles	Nr.	1 C/O									
Rated insulation voltage Ui IEC/EN	V	690									
IEC Conventional free air thermal current Ith	A	0.1									
Mechanical features											
Operating position	normal allowable	On vertical plane Any									
Fixing	Front lateral mounting										
Weight	g	13									
Auxiliary contact characteristics											
Type of contact	1 C/O										
Thermal current Ith	A	0,1									
Electrical characteristics											
Conductivity	5V 1mA										
UL technical data											
Rated operational voltage AC (UL)	V	600									
Ambient conditions											
Temperature	<table> <tr> <td>Operating temperature</td> <td>min</td> <td>°C</td> <td>-40</td> </tr> <tr> <td></td> <td>max</td> <td>°C</td> <td>+70</td> </tr> </table>			Operating temperature	min	°C	-40		max	°C	+70
Operating temperature	min	°C	-40								
	max	°C	+70								
Storage temperature	<table> <tr> <td>min</td> <td>°C</td> <td>-60</td> </tr> <tr> <td>max</td> <td>°C</td> <td>+80</td> </tr> </table>			min	°C	-60	max	°C	+80		
min	°C	-60									
max	°C	+80									
Dimensions											

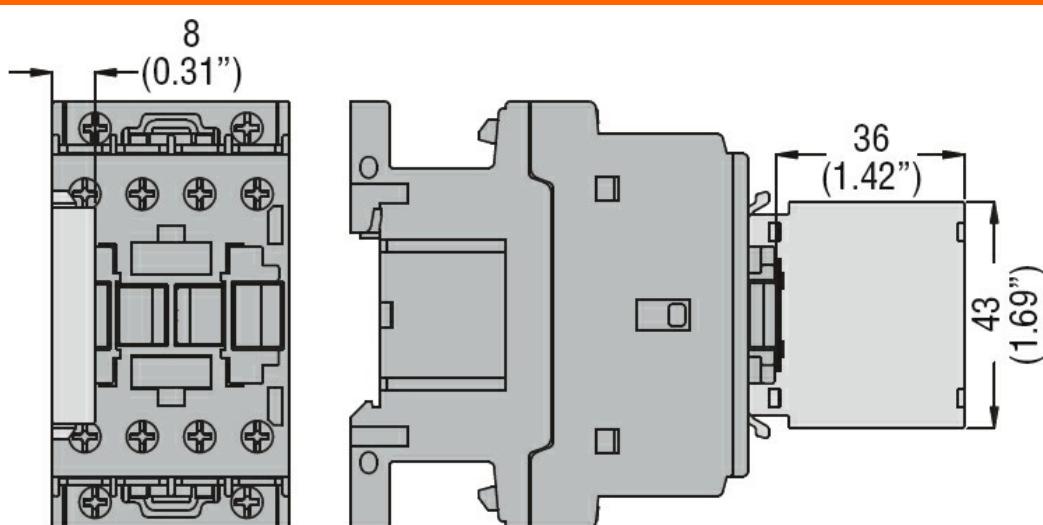

Wiring diagrams

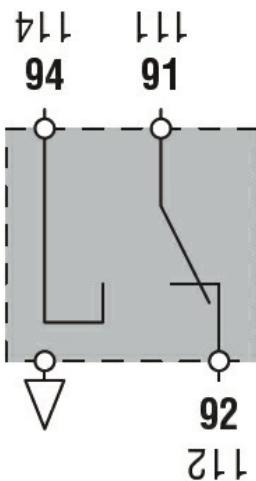

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-5-1

IEC/EN 60947-1

IEC/EN 60947-5-1

UL 60947-1

UL 60947-5-1

Certificates

CCC

CSA

cURus

EAC

ETIM classification

ETIM 8.0

EC000041 -
Auxiliary contact
block