



Product designation	Power contactor		
Product type designation	BF115		
Contact characteristics			
Number of poles	Nr.	3	
Rated insulation voltage U_i IEC/EN	V	1000	
Rated impulse withstand voltage U_{imp}	kV	8	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current I_{th}		A	160
Operational current I_e			
	AC-1 ($\leq 40^\circ C$)	A	160
	AC-1 ($\leq 55^\circ C$)	A	130
	AC-1 ($\leq 70^\circ C$)	A	115
	AC-3 ($\leq 440V \leq 55^\circ C$)	A	115
	AC-4 (400V)	A	54
Rated operational power AC-3 ($T \leq 55^\circ C$)			
	230V	kW	37
	400V	kW	55
	415V	kW	55
	440V	kW	55
	500V	kW	75
	690V	kW	110
	1000V	kW	55
Rated operational current AC-3 ($T \leq 55^\circ C$)			
	230V	A	115
	400V	A	115
	415V	A	115
	440V	A	115
	500V	A	106
	690V	A	106
	1000V	A	39
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 1 poles in series			
	$\leq 24V$	A	160
	48V	A	160
	75V	A	120
	110V	A	10
	220V	A	—
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 2 poles in series			
	$\leq 24V$	A	160
	48V	A	160
	75V	A	160
	110V	A	130
	220V	A	14
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 3 poles in series			

	≤24V	A	160
	48V	A	160
	75V	A	160
	110V	A	140
	220V	A	145
IEC max current Ie in DC1 with L/R ≤ 1ms with 4 poles in series	≤24V	A	160
	48V	A	160
	75V	A	160
	110V	A	160
	220V	A	160
IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 1 poles in series	≤24V	A	160
	48V	A	50
	75V	A	40
	110V	A	6
	220V	A	—
IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 2 poles in series	≤24V	A	160
	48V	A	72
	75V	A	65
	110V	A	65
	220V	A	7
IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 3 poles in series	≤24V	A	160
	48V	A	150
	75V	A	100
	110V	A	100
	220V	A	92
IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 4 poles in series	≤24V	A	160
	48V	A	120
	75V	A	120
	110V	A	125
	220V	A	115
Short-time allowable current for 10s (IEC/EN60947-1)		A	920
Protection fuse			
	gG (IEC)	A	200
	aM (IEC)	A	125
Making capacity (RMS value)		A	1500
Breaking capacity at voltage			
	440V	A	1200
	500V	A	850
	690V	A	905
Resistance per pole (average value)		mΩ	0.45
Power dissipation per pole (average value)			
	I _{th}	W	11.5
	AC-3	W	6.0
Tightening torque for terminals			
	min	Nm	6
	max	Nm	7
	min	I _{bin}	4.4
	max	I _{bin}	5.2

Tightening torque for coil terminal

min	Nm	0.8
max	Nm	1
min	lbin	0.59
max	lbin	0.74

Conductor section

AWG/Kcmil	max	2/0
Flexible w/o lug conductor section	min	mm ² 1.5
	max	mm ² 70
Flexible c/w lug conductor section	min	mm ² 1.5
	max	mm ² 70

Power terminal protection according to IEC/EN 60529

IP20 front

Mechanical features

Operating position

normal	Vertical plan
allowable	±30°

Fixing

Screw / DIN rail
35mm

Weight

g 2060

Operations

Mechanical life	cycles	15000000
Electrical life	cycles	1200000

Safety related data

Performance level B10d according to EN/ISO 13489-1

rated load	cycles	1200000
mechanical load	cycles	15000000

AC coil operating

Rated AC voltage at 50/60Hz, 60Hz

min	V	60
max	V	110

AC operating voltage

of 50/60Hz coil powered at 50Hz	pick-up	min	%Us	80
		max	%Us	110
drop-out		max	%Us	≤70 Us min
of 50/60Hz coil powered at 60Hz	pick-up	min	%Us	80 Us min
		max	%Us	110 Us max
drop-out		max	%Us	≤70 Us min

AC average coil consumption at 20°C


of 50/60Hz coil powered at 50Hz	in-rush	VA	70...175
	holding	VA	1.7...3.5
of 50/60Hz coil powered at 60Hz	in-rush	VA	70...175
	holding	VA	1.7...3.5
of 60Hz coil powered at 60Hz			

Dissipation at holding $\leq 20^{\circ}\text{C}$ 50Hz	in-rush holding	VA	70...175
DC coil operating	VA	1.7...3.5	
DC rated control voltage	W	1.3...1.5	
DC operating voltage	min	V	60
	max	V	110
pick-up	min	%Us	80 Us min
	max	%Us	110 Us max
drop-out	max	%Us	≤ 70 Us min
Average coil consumption $\leq 20^{\circ}\text{C}$	in-rush holding	W	70...80
		W	1.3...1.5
Max cycles frequency			
Mechanical operation		cycles/h	1500
Operating times			
Average time for Us control			
in AC			
	Closing NO	min	ms 45
		max	ms 90
	Opening NO	min	ms 24
		max	ms 60
UL technical data			
Rated operational voltage AC (UL)		V	600
Yielded mechanical performance			
for three-phase AC motor			
	200/208V	HP	40
	220/230V	HP	40
	460/480V	HP	75
	575/600V	HP	100
General USE			
Contactor	AC current	A	165
Short-circuit protection fuse, 600V			
High fault	Short circuit current	kA	100
	Fuse rating	A	200
	Fuse class	J	
Standard fault	Short circuit current	kA	10
	Fuse rating	A	250
	Fuse class	RK5	
Ambient conditions			
Temperature			
Operating temperature	min	$^{\circ}\text{C}$	-50
	max	$^{\circ}\text{C}$	70
Storage temperature	min	$^{\circ}\text{C}$	-60


Max altitude

max °C +80
m 3000

Dimensions

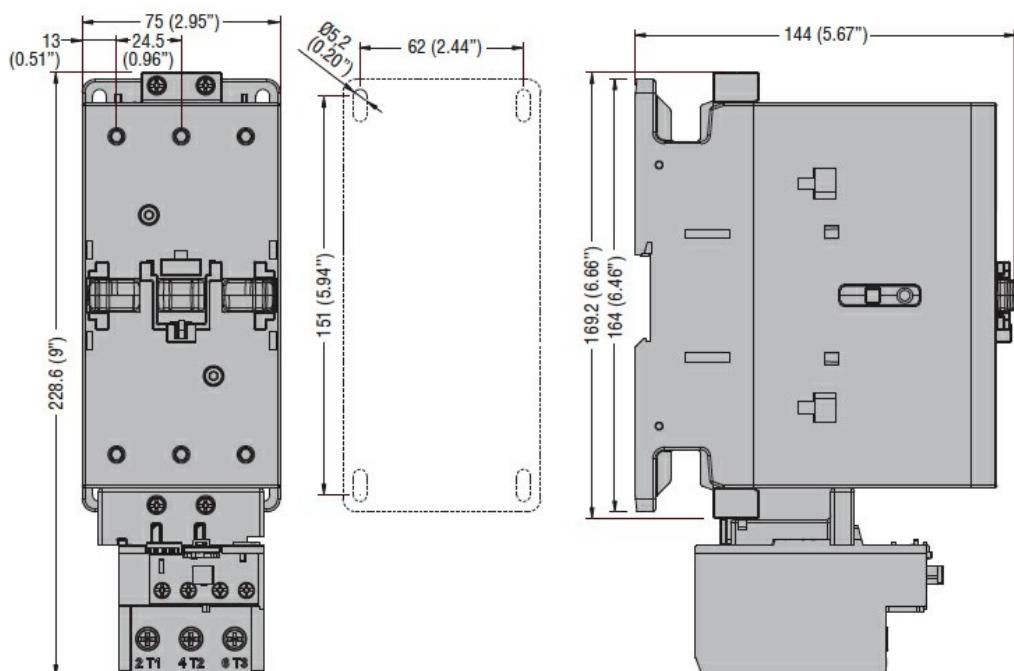

Wiring diagrams

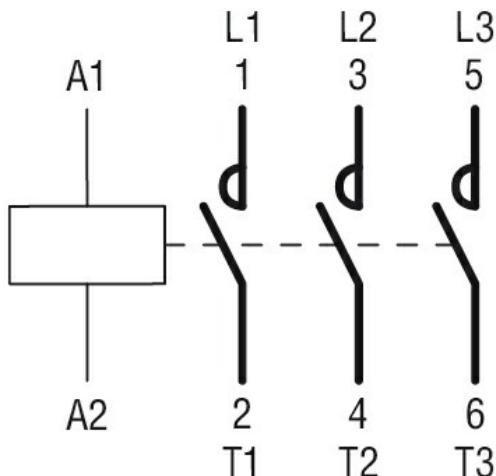

Certifications and compliance

Compliance

[CSA C22.2 n° 60947-1](#)

[CSA C22.2 n° 60947-4-1](#)

[IEC/EN/BS 60947-1](#)

[IEC/EN/BS 60947-4-1](#)

[UL 60947-1](#)

[UL 60947-4-1](#)

Certificates

[CCC](#)

[cULus](#)

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching