



Product designation	Power contactor		
Product type designation	BF150		
Contact characteristics			
Number of poles	Nr.	4	
Rated insulation voltage Ui IEC/EN	V	1000	
Rated impulse withstand voltage Uimp	kV	8	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current Ith		A	165
Operational current Ie			
	AC-1 ($\leq 40^{\circ}\text{C}$)	A	165
	AC-1 ($\leq 55^{\circ}\text{C}$)	A	135
	AC-1 ($\leq 70^{\circ}\text{C}$)	A	118
	AC-3 ($\leq 440\text{V} \leq 55^{\circ}\text{C}$)	A	150
	AC-4 (400V)	A	70
Rated operational current AC-3 ($T \leq 55^{\circ}\text{C}$)			
	230V	A	150
	400V	A	150
	415V	A	150
	440V	A	150
	500V	A	128
	690V	A	113
	1000V	A	51
Rated operational power AC-1 ($T \leq 40^{\circ}\text{C}$)			
	230V	kW	62
	400V	kW	110
	500V	kW	136
	690V	kW	187
IEC max current Ie in DC1 with $L/R \leq 1\text{ms}$ with 1 poles in series			
	$\leq 24\text{V}$	A	165
	48V	A	165
	75V	A	150
	110V	A	10
	220V	A	—
IEC max current Ie in DC1 with $L/R \leq 1\text{ms}$ with 2 poles in series			
	$\leq 24\text{V}$	A	165
	48V	A	165
	75V	A	165
	110V	A	150
	220V	A	14
IEC max current Ie in DC1 with $L/R \leq 1\text{ms}$ with 3 poles in series			
	$\leq 24\text{V}$	A	165
	48V	A	165
	75V	A	165

	110V	A	160
	220V	A	150
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 4 poles in series			
	$\leq 24V$	A	165
	48V	A	165
	75V	A	165
	110V	A	165
	220V	A	165
IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 1 poles in series			
	$\leq 24V$	A	165
	48V	A	60
	75V	A	44
	110V	A	6
	220V	A	—
IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 2 poles in series			
	$\leq 24V$	A	165
	48V	A	82
	75V	A	70
	110V	A	80
	220V	A	7
IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 3 poles in series			
	$\leq 24V$	A	165
	48V	A	195
	75V	A	110
	110V	A	120
	220V	A	120
IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 4 poles in series			
	$\leq 24V$	A	165
	48V	A	130
	75V	A	130
	110V	A	150
	220V	A	150
Short-time allowable current for 10s (IEC/EN60947-1)			A 1200
Protection fuse			
	gG (IEC)	A	250
	aM (IEC)	A	160
Making capacity (RMS value)			A 1500
Breaking capacity at voltage			
	440V	A	1200
	500V	A	1025
	690V	A	905
Resistance per pole (average value)			$\text{m}\Omega$ 0.45
Power dissipation per pole (average value)			
	I _{th}	W	12
	AC-3	W	10.1
Tightening torque for terminals			
	min	Nm	6
	max	Nm	7
	min	Ibin	35.4
	max	Ibin	44.3
Tightening torque for coil terminal			
	min	Nm	0.8
	max	Nm	1

	min	Ibin	0.59
	max	Ibin	0.74
Max number of wires simultaneously connectable	Nr. 2		
Conductor section			
AWG/Kcmil	max	2/0	
Flexible w/o lug conductor section	min	mm ²	1.5
	max	mm ²	70
Flexible c/w lug conductor section	min	mm ²	1.5
	max	mm ²	70
Power terminal protection according to IEC/EN 60529	IP20 front		
Mechanical features			
Operating position	normal allowable	Vertical plan ±30°	
Fixing	Screw / DIN rail 35mm		
Weight	g	2460	
Operations			
Mechanical life	cycles	15000000	
Electrical life	cycles	800000	
Safety related data			
Performance level B10d according to EN/ISO 13489-1	rated load	cycles	800000
	mechanical load	cycles	15000000
EMC compatibility	yes		
AC coil operating			
Rated AC voltage at 50/60Hz, 60Hz	min	V	60
	max	V	110
AC operating voltage			
of 50/60Hz coil powered at 50Hz			
pick-up	min	%Us	80 Us min
	max	%Us	110 Us max
drop-out	max	%Us	≤70 Us min
of 50/60Hz coil powered at 60Hz			
pick-up	min	%Us	80 Us min
	max	%Us	110 Us max
drop-out	max	%Us	≤70 Us min
AC average coil consumption at 20°C			
of 50/60Hz coil powered at 50Hz	in-rush	VA	70...175
	holding	VA	1.7...3.5
of 50/60Hz coil powered at 60Hz	in-rush	VA	70...175
	holding	VA	1.7...3.5
of 60Hz coil powered at 60Hz	in-rush	VA	70...175

	holding	VA	1.7...3.5
Dissipation at holding $\leq 20^{\circ}\text{C}$ 50Hz		W	1.3...1.5
DC coil operating			
DC rated control voltage		min	V 60
		max	V 110
DC operating voltage			
pick-up		min	%Us 80 Us min
		max	%Us 110 Us max
drop-out		max	%Us ≤ 70 Us min
Average coil consumption $\leq 20^{\circ}\text{C}$		in-rush	W 70...80
		holding	W 1.3...1.5
Max cycles frequency			
Mechanical operation			cycles/h 2000
Operating times			
Average time for Us control			
in AC			
Closing NO		min	ms 45
		max	ms 90
Opening NO		min	ms 24
		max	ms 60
in DC			
Closing NO		min	ms 45
		max	ms 90
Opening NO		min	ms 24
		max	ms 60
UL technical data			
Rated operational voltage AC (UL)		V	600
Yielded mechanical performance			
for three-phase AC motor			
	200/208V	HP	50
	220/230V	HP	50
	460/480V	HP	100
	575/600V	HP	125
General USE			
Contactor			
	AC current	A	165
Short-circuit protection fuse, 600V			
High fault			
	Short circuit current	kA	100
	Fuse rating	A	200
	Fuse class	J	
Standard fault			
	Short circuit current	kA	10
	Fuse rating	A	250
	Fuse class	RK5	
Ambient conditions			

Temperature

Operating temperature

	min	°C	-40
	max	°C	70

Storage temperature

	min	°C	-50
	max	°C	80

Max altitude


m 3000

Resistance & Protection


Pollution degree

3

Dimensions

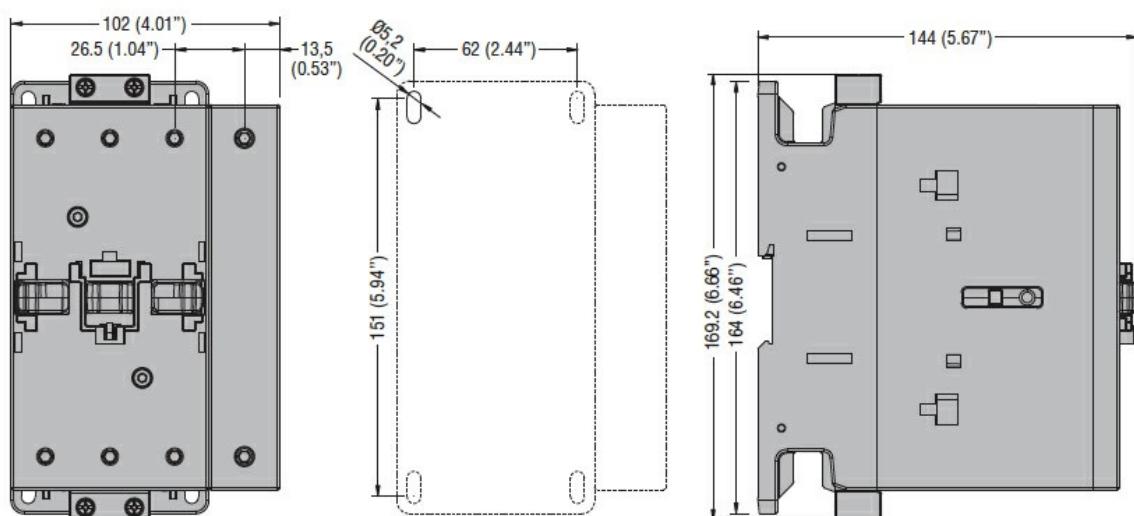

Wiring diagrams

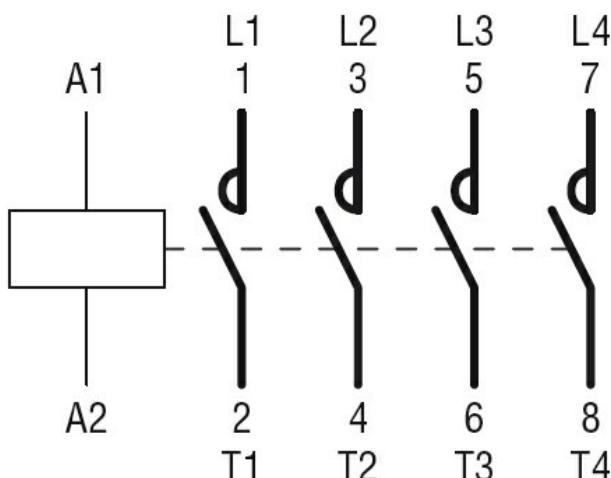

Certifications and compliance

Compliance

[CSA C22.2 n° 60947-1](#)

[CSA C22.2 n° 60947-4-1](#)

[IEC/EN/BS 60947-1](#)

[IEC/EN/BS 60947-4-1](#)

[UL 60947-1](#)

[UL 60947-4-1](#)

Certificates

[CCC](#)

[cULus](#)

EAC

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching