



Product designation	Power contactor		
Product type designation	BF160		
<b>Contact characteristics</b>			
Number of poles	Nr.	4	
Rated insulation voltage $U_i$ IEC/EN	V	1000	
Rated impulse withstand voltage $U_{imp}$	kV	8	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current $I_{th}$		A	250
Operational current $I_e$			
	AC-1 ( $\leq 40^\circ\text{C}$ )	A	250
	AC-1 ( $\leq 55^\circ\text{C}$ )	A	210
	AC-1 ( $\leq 70^\circ\text{C}$ )	A	180
	AC-3 ( $\leq 440\text{V} \leq 55^\circ\text{C}$ )	A	160
	AC-4 (400V)	A	75
Rated operational current AC-3 ( $T \leq 55^\circ\text{C}$ )			
	230V	A	160
	400V	A	160
	415V	A	160
	440V	A	160
	500V	A	150
	690V	A	135
	1000V	A	60
Rated operational power AC-1 ( $T \leq 40^\circ\text{C}$ )			
	230V	kW	95
	400V	kW	165
	500V	kW	181
	690V	kW	284
IEC max current $I_e$ in DC1 with $L/R \leq 1\text{ms}$ with 1 poles in series			
	$\leq 24\text{V}$	A	250
	48V	A	250
	75V	A	250
	110V	A	110
	220V	A	—
IEC max current $I_e$ in DC1 with $L/R \leq 1\text{ms}$ with 2 poles in series			
	$\leq 24\text{V}$	A	250
	48V	A	250
	75V	A	250
	110V	A	150
	220V	A	130
IEC max current $I_e$ in DC1 with $L/R \leq 1\text{ms}$ with 3 poles in series			
	$\leq 24\text{V}$	A	250
	48V	A	250
	75V	A	250

	110V	A	160
	220V	A	150
	330V	A	130
IEC max current $I_e$ in DC1 with $L/R \leq 1\text{ms}$ with 4 poles in series			
	$\leq 24V$	A	250
	48V	A	250
	75V	A	250
	110V	A	250
	220V	A	275
IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 1 poles in series			
	$\leq 24V$	A	250
	48V	A	250
	75V	A	160
	110V	A	80
	220V	A	—
IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 2 poles in series			
	$\leq 24V$	A	250
	48V	A	250
	75V	A	160
	110V	A	120
	220V	A	90
IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 3 poles in series			
	$\leq 24V$	A	250
	48V	A	250
	75V	A	160
	110V	A	140
	220V	A	120
	330V	A	90
IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 4 poles in series			
	$\leq 24V$	A	250
	48V	A	250
	75V	A	160
	110V	A	140
	220V	A	140
	330V	A	140
	460V	A	90
Short-time allowable current for 10s (IEC/EN60947-1)			A 1280
Protection fuse			
	gG (IEC)	A	315
	aM (IEC)	A	200
Making capacity (RMS value)			A 1360
Breaking capacity at voltage			
	440V	A	1360
	500V	A	1326
	690V	A	1139
Resistance per pole (average value)			$\text{m}\Omega$ 0.18
Power dissipation per pole (average value)			
	I <sub>th</sub>	W	11
	AC-3	W	4.5
Tightening torque for terminals			
	min	Nm	18
	max	Nm	18
	min	I <sub>bin</sub>	159
	max	I <sub>bin</sub>	159

## Tightening torque for coil terminal

	min	Nm	0.8
	max	Nm	1

Power terminal protection according to IEC/EN 60529 IP00

**Mechanical features**

## Operating position

	normal allowable	Vertical plan ±30°
--	---------------------	-----------------------

## Fixing

Weight	g	4000
--------	---	------

**Operations**

Mechanical life	cycles	10000000
-----------------	--------	----------

Electrical life	cycles	1000000
-----------------	--------	---------

**Safety related data**

## Performance level B10d according to EN/ISO 13489-1

	rated load	cycles	1000000
	mechanical load	cycles	10000000

EMC compatibility yes

**AC coil operating**

## Rated AC voltage at 50/60Hz, 60Hz

	min	V	250
	max	V	500

## AC operating voltage

of 50/60Hz coil powered at 50Hz			
pick-up	min	%Us	80 Us min
	max	%Us	110 Us max
drop-out	min	%Us	20
	max	%Us	≤70 Us min

of 50/60Hz coil powered at 60Hz			
pick-up	min	%Us	80 Us min
	max	%Us	110 Us max
drop-out	min	%Us	20
	max	%Us	≤70 Us min

## AC average coil consumption at 20°C

of 50/60Hz coil powered at 50Hz			
	in-rush	VA	160...230
	holding	VA	1.5...3.0

of 50/60Hz coil powered at 60Hz			
	in-rush	VA	160...230
	holding	VA	1.5...3.0

of 60Hz coil powered at 60Hz			
	in-rush	VA	160...230
	holding	VA	1.5...3.0

Dissipation at holding ≤20°C 50Hz W 1.5...3.0


**DC coil operating**

## DC rated control voltage


	min	V	250
	max	V	500

## DC operating voltage

pick-up	min	%Us	85 Us min
	max	%Us	110 Us max
drop-out	max	%Us	≤70 Us min
Average coil consumption ≤20°C			
	in-rush	W	160...230
	holding	W	1.5...3.0
<b>Max cycles frequency</b>			
Mechanical operation		cycles/h	1000
<b>Operating times</b>			
Average time for Us control			
in AC			
Closing NO	min	ms	50
	max	ms	100
Opening NO	min	ms	35
	max	ms	75
<b>UL technical data</b>			
Rated operational voltage AC (UL)		V	600
Yielded mechanical performance			
for three-phase AC motor			
200/208V	HP	50	
220/230V	HP	60	
460/480V	HP	125	
575/600V	HP	150	
General USE			
Contactor	AC current	A	250
Short-circuit protection fuse, 600V			
High fault	Short circuit current	kA	100
	Fuse rating	A	400
	Fuse class		J
Standard fault	Short circuit current	kA	10
	Fuse rating	A	400
	Fuse class		RK5
<b>Ambient conditions</b>			
Temperature			
Operating temperature	min	°C	-40
	max	°C	70
Storage temperature	min	°C	-50
	max	°C	80
Max altitude			
	m		3000
<b>Resistance &amp; Protection</b>			
Pollution degree			3
<b>Dimensions</b>			

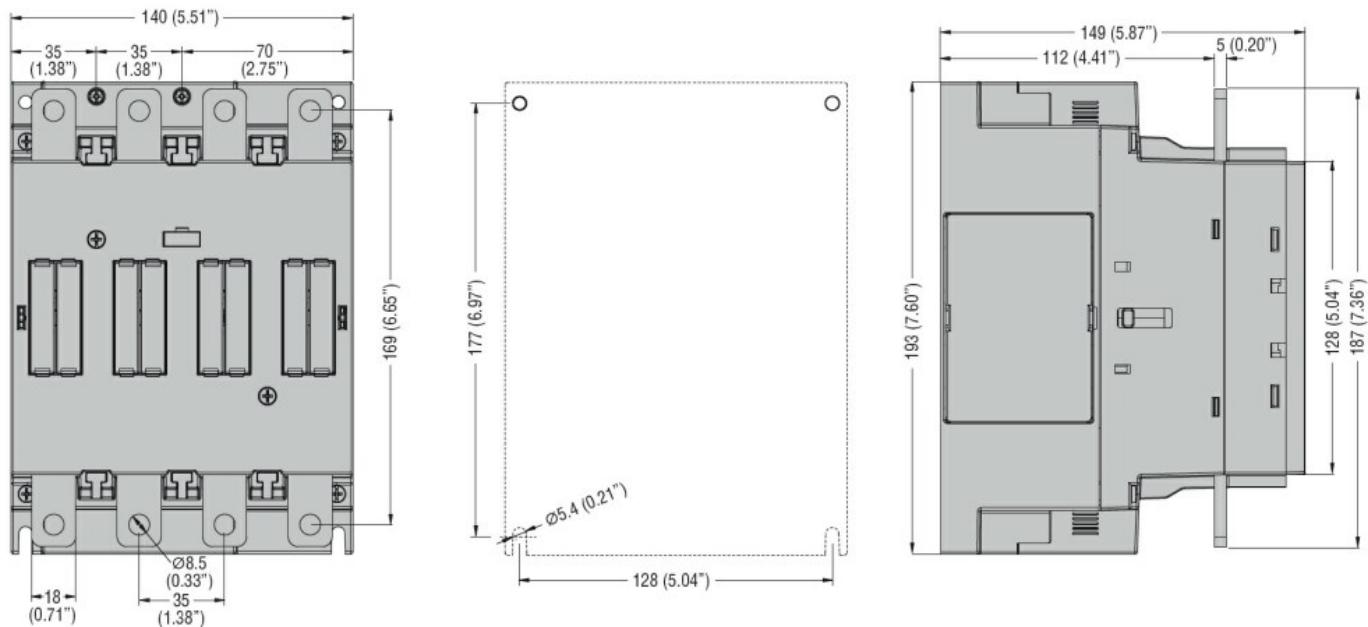

### Wiring diagrams

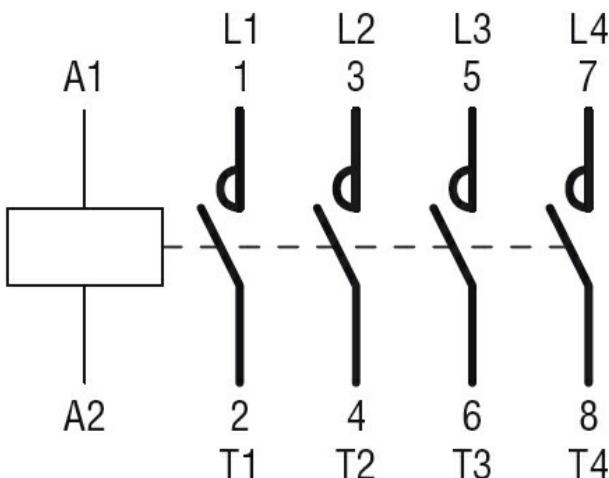

### Certifications and compliance

#### Compliance

[CSA C22.2 n° 60947-1](#)

[CSA C22.2 n° 60947-4-1](#)

[IEC/EN/BS 60947-1](#)

[IEC/EN/BS 60947-4-1](#)

[UL 60947-1](#)

[UL 60947-4-1](#)

#### Certificates

[cULus](#)

### ETIM classification

ETIM 8.0

EC000066 -  
Power contactor,  
AC switching