



| | | | |
|---|--------------------------------------|-----|------|
| Product designation | Power contactor | | |
| Product type designation | BF26 | | |
| Contact characteristics | | | |
| Number of poles | Nr. | 3 | |
| Rated insulation voltage U_i IEC/EN | V | 690 | |
| Rated impulse withstand voltage U_{imp} | kV | 6 | |
| Operational frequency | min | Hz | 25 |
| | max | Hz | 400 |
| IEC Conventional free air thermal current I_{th} | A | 45 | |
| Operational current I_e | | | |
| | AC-1 ($\leq 40^\circ C$) | A | 45 |
| | AC-1 ($\leq 55^\circ C$) | A | 36 |
| | AC-1 ($\leq 70^\circ C$) | A | 32 |
| | AC-3 ($\leq 440V \leq 55^\circ C$) | A | 26 |
| | AC-4 (400V) | A | 11.5 |
| Rated operational power AC-3 ($T \leq 55^\circ C$) | 230V | kW | 7.3 |
| | 400V | kW | 13 |
| | 415V | kW | 14 |
| | 440V | kW | 14 |
| | 500V | kW | 15.6 |
| | 690V | kW | 18.5 |
| Rated operational power AC-1 ($T \leq 40^\circ C$) | 230V | kW | 17 |
| | 400V | kW | 30 |
| | 500V | kW | 37 |
| | 690V | kW | 51 |
| IEC max current I_e in DC1 with $L/R \leq 1ms$ with 1 poles in series | $\leq 24V$ | A | 25 |
| | 48V | A | 21 |
| | 75V | A | 18 |
| | 110V | A | 6 |
| | 220V | A | — |
| IEC max current I_e in DC1 with $L/R \leq 1ms$ with 2 poles in series | $\leq 24V$ | A | 28 |
| | 48V | A | 28 |
| | 75V | A | 25 |
| | 110V | A | 22 |
| | 220V | A | 2 |
| IEC max current I_e in DC1 with $L/R \leq 1ms$ with 3 poles in series | $\leq 24V$ | A | 28 |
| | 48V | A | 28 |
| | 75V | A | 25 |
| | 110V | A | 24 |

| | | | |
|---|-------------------|------------------|--------------------|
| | 220V | A | 20 |
| IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 4 poles in series | | | |
| | $\leq 24\text{V}$ | A | 28 |
| | 48V | A | 28 |
| | 75V | A | 25 |
| | 110V | A | 24 |
| | 220V | A | 26 |
| IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 1 poles in series | | | |
| | $\leq 24\text{V}$ | A | 18 |
| | 48V | A | 15 |
| | 75V | A | 13 |
| | 110V | A | 2 |
| | 220V | A | — |
| IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 2 poles in series | | | |
| | $\leq 24\text{V}$ | A | 20 |
| | 48V | A | 20 |
| | 75V | A | 18 |
| | 110V | A | 13 |
| | 220V | A | 3 |
| IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 3 poles in series | | | |
| | $\leq 24\text{V}$ | A | 25 |
| | 48V | A | 25 |
| | 75V | A | 20 |
| | 110V | A | 18 |
| | 220V | A | 19 |
| IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 4 poles in series | | | |
| | $\leq 24\text{V}$ | A | 30 |
| | 48V | A | 30 |
| | 75V | A | 25 |
| | 110V | A | 20 |
| | 220V | A | 15 |
| Short-time allowable current for 10s (IEC/EN60947-1) | | | A 210 |
| Protection fuse | | | |
| | gG (IEC) | A | 50 |
| | aM (IEC) | A | 32 |
| Making capacity (RMS value) | | | A 260 |
| Breaking capacity at voltage | | | |
| | 440V | A | 208 |
| | 500V | A | 184 |
| | 690V | A | 168 |
| Resistance per pole (average value) | | | $\text{m}\Omega$ 2 |
| Power dissipation per pole (average value) | | | |
| | I _{th} | W | 4 |
| | AC-3 | W | 1.4 |
| Tightening torque for terminals | | | |
| | min | Nm | 2.5 |
| | max | Nm | 3 |
| | min | I _{bin} | 1.8 |
| | max | I _{bin} | 2.2 |
| Tightening torque for coil terminal | | | |
| | min | Nm | 0.8 |
| | max | Nm | 1 |
| | min | I _{bin} | 0.8 |

| | | | | | |
|---|-------------------------------|-----------------------|---------------------|--|--|
| | max | Ibin | 0.74 | | |
| Max number of wires simultaneously connectable | Nr. 2 | | | | |
| Conductor section | | | | | |
| AWG/Kcmil | max | 6 | | | |
| Flexible w/o lug conductor section | min | mm ² | 2.5 | | |
| | max | mm ² | 16 | | |
| Flexible c/w lug conductor section | min | mm ² | 1 | | |
| | max | mm ² | 10 | | |
| Flexible with insulated spade lug conductor section | min | mm ² | 1 | | |
| | max | mm ² | 10 | | |
| Power terminal protection according to IEC/EN 60529 | IP20 when properly wired | | | | |
| Mechanical features | | | | | |
| Operating position | normal allowable | Vertical plan ±30° | | | |
| Fixing | Screw / DIN rail 35mm | | | | |
| Weight | g | 420 | | | |
| Operations | | | | | |
| Mechanical life | cycles 20000000 | | | | |
| Electrical life | cycles 1600000 | | | | |
| Safety related data | | | | | |
| Performance level B10d according to EN/ISO 13489-1 | rated load mechanical load | cycles | 1600000 20000000 | | |
| EMC compatibility | yes | | | | |
| AC coil operating | | | | | |
| Rated AC voltage at 60Hz | V | 460 | | | |
| AC operating voltage | | | | | |
| of 60Hz coil powered at 60Hz | | | | | |
| pick-up | min max | %Us | 80 110 | | |
| drop-out | min max | %Us | 20 55 | | |
| AC average coil consumption at 20°C | | | | | |
| of 60Hz coil powered at 60Hz | in-rush holding | VA | 75 9 | | |
| Dissipation at holding ≤20°C 50Hz | W | 2.5 | | | |
| Max cycles frequency | | | | | |
| Mechanical operation | cycles/h 3600 | | | | |
| Operating times | | | | | |
| Average time for Us control | | | | | |
| in AC | | | | | |
| Closing NO | min max | ms | 8 24 | | |

| | | | |
|------------|-----|----|----|
| Opening NO | min | ms | 5 |
| | max | ms | 15 |
| Closing NC | min | ms | 9 |
| | max | ms | 20 |
| Opening NC | min | ms | 9 |
| | max | ms | 17 |

UL technical data

| | | |
|--|---|-----|
| Rated operational voltage AC (UL) | V | 600 |
| Full-load current (FLA) for three-phase AC motor | | |
| at 480V | A | 21 |
| at 600V | A | 22 |

Yielded mechanical performance


| | | | |
|---------------------------|----------|----|-----|
| for single-phase AC motor | 110/120V | HP | 2 |
| | 230V | HP | 5 |
| for three-phase AC motor | | | |
| | 200/208V | HP | 7.5 |
| | 220/230V | HP | 7.5 |
| | 460/480V | HP | 15 |
| | 575/600V | HP | 20 |

General USE


| | | | |
|-------------------------------------|-----------------------|----|-----|
| Contactor | AC current | A | 45 |
| Short-circuit protection fuse, 600V | | | |
| High fault | Short circuit current | kA | 100 |
| | Fuse rating | A | 100 |
| | Fuse class | J | |
| Standard fault | Short circuit current | kA | 5 |
| | Fuse rating | A | 100 |

Ambient conditions

| | | | | |
|-------------------------|-----------------------|-----|----|------|
| Temperature | Operating temperature | min | °C | -50 |
| | | max | °C | 70 |
| Storage temperature | | min | °C | -60 |
| | | max | °C | 80 |
| Max altitude | | m | | 3000 |
| Resistance & Protection | | | | |
| Pollution degree | | | | 3 |
| Dimensions | | | | |

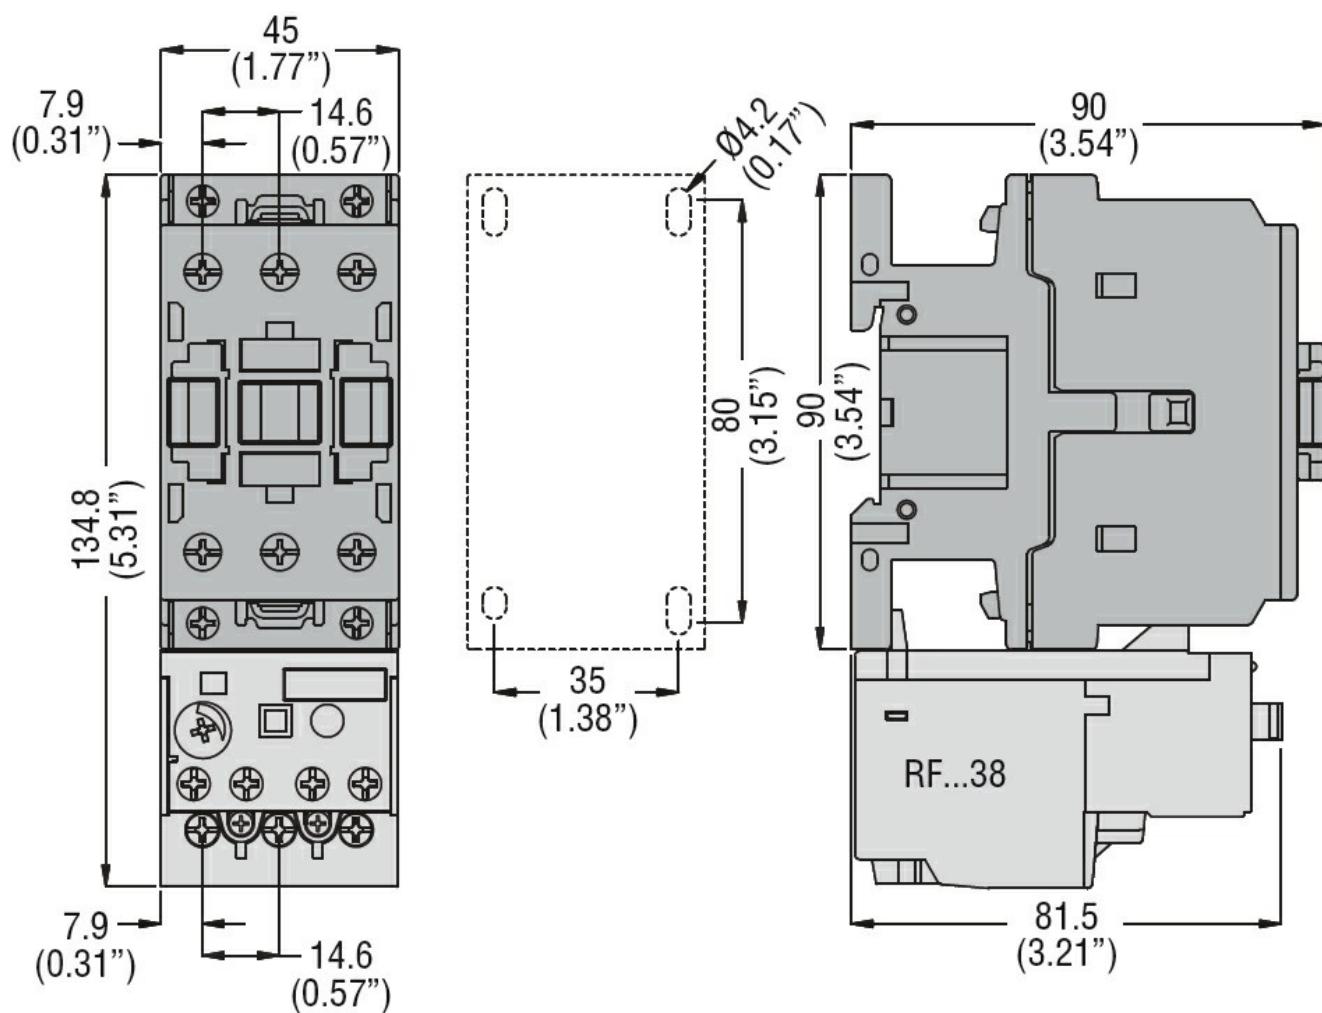

Wiring diagrams

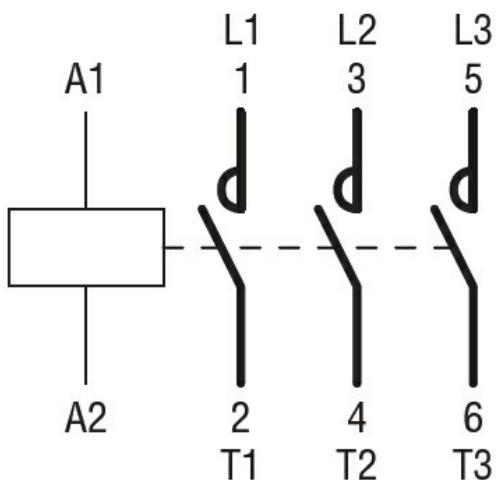

Certifications and compliance

Compliance

[CSA C22.2 n° 60947-1](#)

[CSA C22.2 n° 60947-4-1](#)

[IEC/EN/BS 60947-1](#)

[IEC/EN/BS 60947-4-1](#)

[UL 60947-1](#)

UL 60947-4-1

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching