




Product designation	Power contactor		
Product type designation	BF50		
Contact characteristics			
Number of poles	Nr.	4	
Rated insulation voltage U_i IEC/EN	V	1000	
Rated impulse withstand voltage U_{imp}	kV	8	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current I_{th}		A	90
Operational current I_e			
	AC-1 ($\leq 40^\circ C$)	A	90
	AC-1 ($\leq 55^\circ C$)	A	75
	AC-1 ($\leq 70^\circ C$)	A	65
	AC-3 ($\leq 440V \leq 55^\circ C$)	A	50
	AC-4 (400V)	A	28
Rated operational current AC-3 ($T \leq 55^\circ C$)			
	230V	A	50
	400V	A	50
	415V	A	50
	440V	A	50
	500V	A	44
	690V	A	39
	1000V	A	23
Rated operational power AC-1 ($T \leq 40^\circ C$)			
	230V	kW	34
	400V	kW	59
	500V	kW	74
	690V	kW	102
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 1 poles in series			
	$\leq 24V$	A	45
	48V	A	40
	75V	A	40
	110V	A	8
	220V	A	—
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 2 poles in series			
	$\leq 24V$	A	60
	48V	A	60
	75V	A	60
	110V	A	50
	220V	A	7
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 3 poles in series			
	$\leq 24V$	A	60
	48V	A	60
	75V	A	60

	110V	A	55
	220V	A	75
IEC max current Ie in DC1 with L/R ≤ 1ms with 4 poles in series			
	≤24V	A	60
	48V	A	60
	75V	A	60
	110V	A	60
	220V	A	90
IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 1 poles in series			
	≤24V	A	30
	48V	A	25
	75V	A	22
	110V	A	3
	220V	A	—
IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 2 poles in series			
	≤24V	A	35
	48V	A	35
	75V	A	30
	110V	A	25
	220V	A	5
IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 3 poles in series			
	≤24V	A	50
	48V	A	50
	75V	A	45
	110V	A	30
	220V	A	40
IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 4 poles in series			
	≤24V	A	55
	48V	A	55
	75V	A	55
	110V	A	45
	220V	A	50
Short-time allowable current for 10s (IEC/EN60947-1)			A 400
Protection fuse			
	gG (IEC)	A	100
	aM (IEC)	A	50
Making capacity (RMS value)			A 500
Breaking capacity at voltage			
	440V	A	400
	500V	A	352
	690V	A	312
Resistance per pole (average value)			mΩ 0.8
Power dissipation per pole (average value)			
	I _{th}	W	6.5
	AC-3	W	2
Tightening torque for terminals			
	min	Nm	4
	max	Nm	5
	min	I _{bin}	2.95
	max	I _{bin}	3.69
Tightening torque for coil terminal			
	min	Nm	0.8
	max	Nm	1


		min	Ibin	0.8
		max	Ibin	0.74
Max number of wires simultaneously connectable				Nr. 2
Conductor section				
AWG/Kcmil				
				max 2
Flexible w/o lug conductor section				
				min mm ² 1.5
				max mm ² 35
Flexible c/w lug conductor section				
				min mm ² 1.5
				max mm ² 35
Power terminal protection according to IEC/EN 60529				IP20 front
Mechanical features				
Operating position				normal allowable Vertical plan ±30°
				Screw / DIN rail 35mm
Fixing				
Weight				g 1240
Operations				
Mechanical life				cycles 15000000
Electrical life				cycles 1400000
Safety related data				
Performance level B10d according to EN/ISO 13489-1				
				rated load cycles 1400000
				mechanical load cycles 15000000
EMC compatibility				yes
AC coil operating				
Rated AC voltage at 60Hz				V 120
AC operating voltage				
of 60Hz coil powered at 60Hz				
pick-up				
				min %Us 80
				max %Us 110
drop-out				
				min %Us 20
				max %Us 55
AC average coil consumption at 20°C				
of 60Hz coil powered at 60Hz				
				in-rush VA 210
				holding VA 15
Dissipation at holding ≤20°C 50Hz				W 5
Max cycles frequency				
Mechanical operation				cycles/h 3600
Operating times				
Average time for Us control				
in AC				
Closing NO				
				min ms 12
				max ms 28
Opening NO				
				min ms 8
				max ms 22

in DC			
Closing NO	min	ms	40
	max	ms	85
Opening NO	min	ms	20
	max	ms	55
UL technical data			
Rated operational voltage AC (UL)		V	600
Full-load current (FLA) for three-phase AC motor		at 480V	A 52
		at 600V	A 41
Yielded mechanical performance			
for single-phase AC motor	110/120V	HP	5
	230V	HP	10
for three-phase AC motor	200/208V	HP	15
	220/230V	HP	20
	460/480V	HP	40
	575/600V	HP	40
General USE			
Contactor	AC current	A	90
Short-circuit protection fuse, 600V			
High fault	Short circuit current	kA	100
	Fuse rating	A	150
	Fuse class		J
Standard fault	Short circuit current	kA	5
	Fuse rating	A	150
	Fuse class		RK5
Ambient conditions			
Temperature			
Operating temperature	min	°C	-50
	max	°C	70
Storage temperature	min	°C	-60
	max	°C	80
Max altitude		m	3000
Resistance & Protection			
Pollution degree			3
Dimensions			

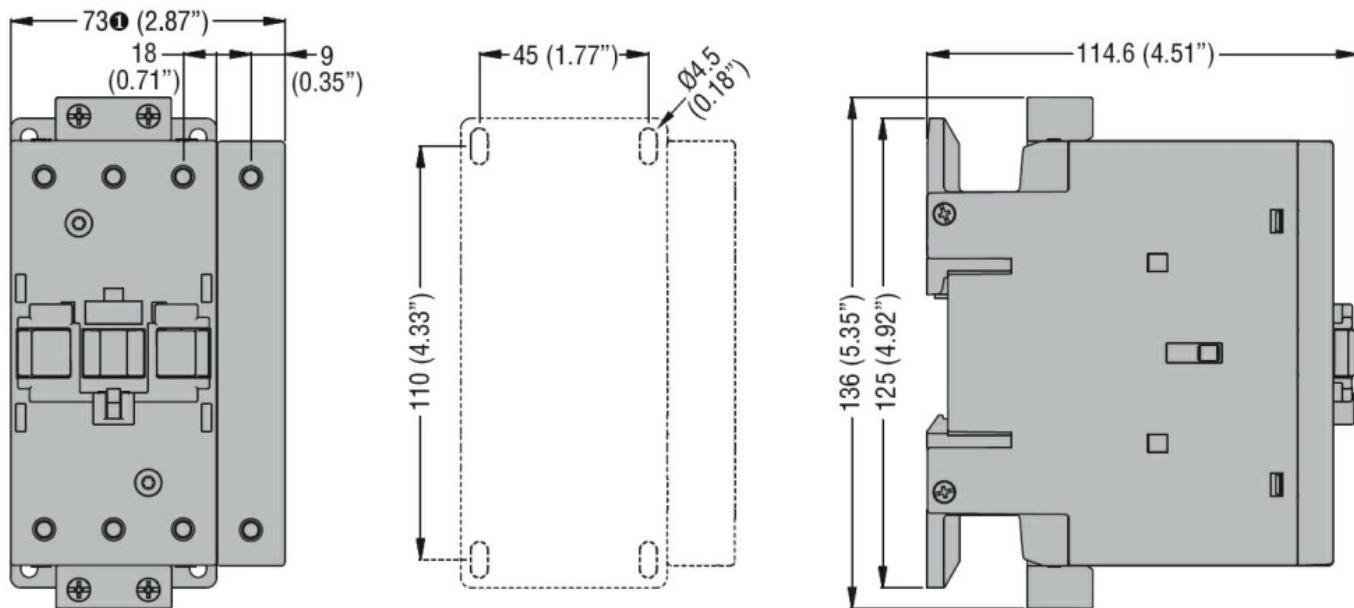

① BF80T2 82mm/3.23"

Wiring diagrams

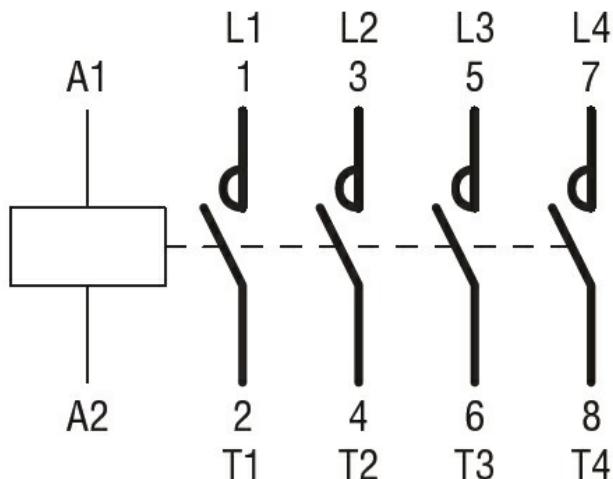

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN/BS 60947-1

IEC/EN/BS 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching