




Product designation	Screw fixing brackets for BF09...BF38		
Product type designation	BFX8902		
<b>Mechanical features</b>			
Weight	g	2	
AC coil operating	V	48	
Rated AC voltage at 50/60Hz	V	48	
AC operating voltage			
of 50/60Hz coil powered at 50Hz	min	%Us	20
drop-out	max	%Us	55
of 50/60Hz coil powered at 60Hz	min	%Us	85
pick-up	max	%Us	110
drop-out	min	%Us	20
	max	%Us	55
AC average coil consumption at 20°C			
of 50/60Hz coil powered at 50Hz	in-rush	VA	75
	holding	VA	9
of 50/60Hz coil powered at 60Hz	in-rush	VA	70
	holding	VA	6.5
of 60Hz coil powered at 60Hz	in-rush	VA	75
	holding	VA	9
Dissipation at holding ≤20°C 50Hz	W	2.5	
<b>UL technical data</b>			
Rated operational voltage AC (UL)	V	600	
Dimensions			

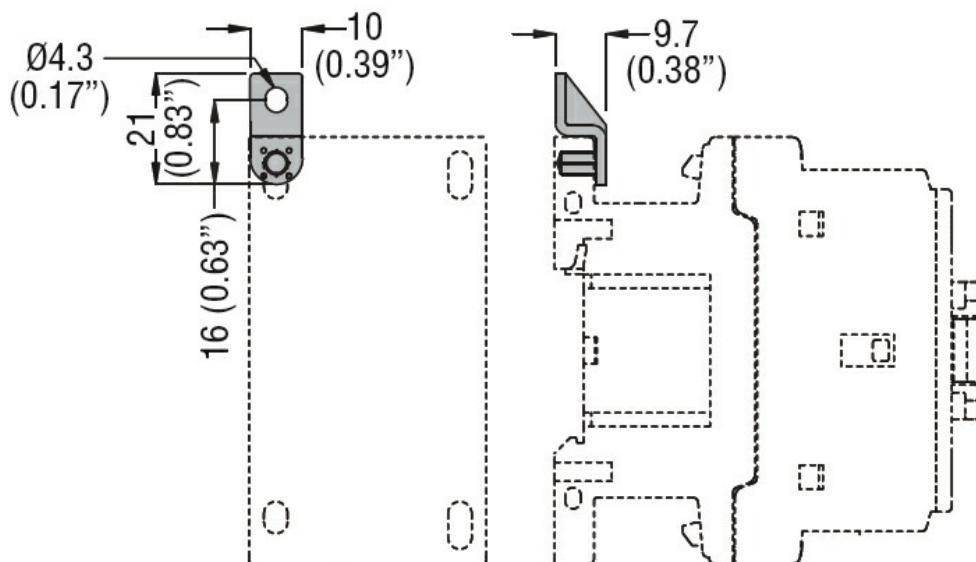

**Certifications and compliance**

**Certificates**

/

**ETIM classification**

**ETIM 8.0**

EC002498 -  
Accessories/spare  
parts for low-  
voltage switch  
technology