

## KSR label plate




### Product information

High-quality, halogen-free round label plate (PC circular blank) for subsequent labeling of cables, lines and conduits.

Fastened with either a cable tie or the S-hook.

### Information, conformities and approvals

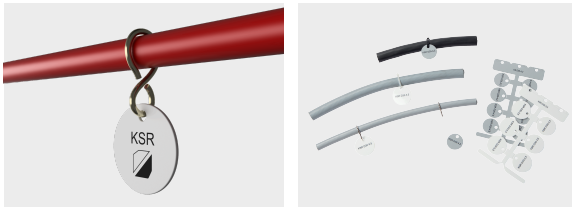

Article	Order No.	Color	RAL equiv.	Marking diameter Ø mm	Number x Holes mm	Cable ties max. width mm	Quantity per frame	Software Article	Base plate	PU pcs.
<b>Mounting hole 3.5 mm</b>										
KSR D20-3,5	86411210	White	9016	20	1x 3.5	2.9	8	447	GP3	120
KSR D20-3,5	86411222	Gray	7038	20	1x 3.5	2.9	8	453	GP3	120
KSR D25-3,5	86411214	White	9016	25	1x 3.5	2.9	8	449	GP3	120
KSR D25-3,5	86411226	Gray	7038	25	1x 3.5	2.9	8	455	GP3	120
KSR D30-3,5	86411218	White	9016	30	1x 3.5	2.9	6	451	GP3	90
KSR D30-3,5	86411230	Gray	7038	30	1x 3.5	2.9	6	457	GP3	90
<b>Mounting hole 4.2 mm</b>										
KSR D20-4,2	86411212	White	9016	20	1x 4.2	3.6	8	448	GP3	120
KSR D20-4,2	86411224	Gray	7038	20	1x 4.2	3.6	8	454	GP3	120
KSR D25-4,2	86411216	White	9016	25	1x 4.2	3.6	8	450	GP3	120
KSR D25-4,2	86411228	Gray	7038	25	1x 4.2	3.6	8	456	GP3	120



## KSR label plate

Article	Order No.	Color	RAL equiv.	Marking diameter Ø mm	Number x Holes mm	Cable ties max. width mm	Quantity per frame	Software Article	Base plate	PU pcs.
KSR D30-4.2	86411220	White	9016	30	1x 4.2	3.6	6	452	GP3	90
KSR D30-4.2	86411232	Gray	7038	30	1x 4.2	3.6	6	458	GP3	90

### Material properties



Polycarbonate (PC) II

### Thermal properties



Temperature / temperature range -40 °C – 130 °C

### Fire properties



Fire classification V0

### Technical information



Halogen-free

### Classification



ETIM 9: EC001530 || eClass 14: 27281102 || UNSPSC: 39131504 ||

### General technical data



Assembly method 0001000000000

### Assembly method



Cable tie system with plate

### Labelling technology



Plotter



---

## KSR label plate

---

### Labelling technology



Laser



Inkjet

---