





# ELO polycarbonate label, perforated

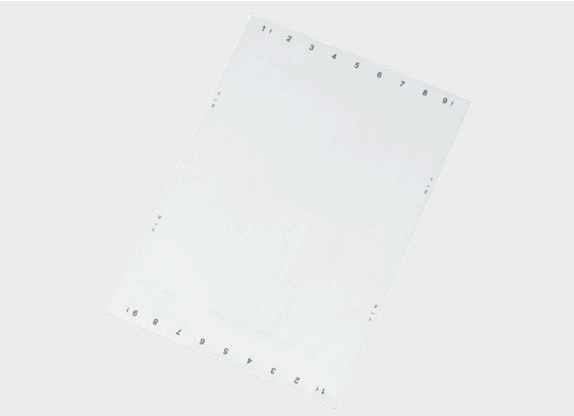

## Product information

High-quality, easily separable polycarbonate sheet labels for single and multi-line marking for printing with the inkjet, plotter and laser printer labeling technologies.

## Information, conformities and approvals



Article	Order No.	Color	Sheet size mm	Printable area mm	No. columns	No. per sheet	Software Article	PU pcs.
For labelling Siemens S7 assemblies								
ELO 27.5x12.85 1)	86561268	Opaque	27.5 x 12.85	27.5 x 12.85	14	126	E24	1260
ELO 28x17,5 1)	86561267	Opaque	28 x 17.5	28 x 17.5	7	112	AAR	1120
ELO 50x12,85 1)	86561264	Opaque	50 x 12.85	50 x 12.85	14	70	E22	700
ELO 50x25,5 1)	86561266	Opaque	50 x 25.5	50 x 25.5	7	35	E23	350
ELO 103.5x17.45 1)	86561262	Opaque	103.5 x 17.45	103.5 x 17.45	10	20	E21	200
ELO 103.5x22.85 1)	86561260	Opaque	103.5 x 22.85	103.5 x 22.85	8	16	E20	160

1) \* The specified software types are blank templates. The predefined types EA0 and ED7 should be used for Siemens S7 assemblies.

## Material properties



Polycarbonate II



## ELO polycarbonate label, perforated

### Thermal properties



Temperature / temperature range -40 °C – 140 °C

### Fire properties



Fire classification V0

### Technical information



Halogen-free

### Classification



ETIM 9: EC001288 || eClass 14: 27144009 || UNSPSC: 39131504 ||

### General technical data



Assembly method 0000000001000

### Assembly method



Strip system

### Labelling technology



Plotter



Laser printer



Inkjet