




Type USH/D

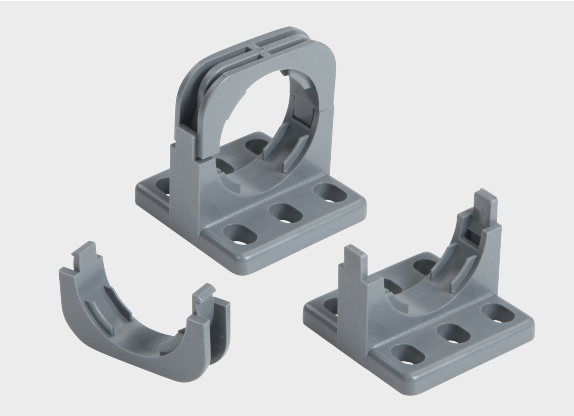


Product information

The USH/D holder with rotating part is made of specially modified polycarbonate. The material is halogen, phosphor and cadmium-free. The holder with rotating part is used for quick and easy holding of Murrplastik EL, ELS and EVK cable protection conduits and features the following advantages:

- Various fastening possibilities
- Conduits can still be rotated
- Pre-assembly of lower part possible

Information, conformities and approvals

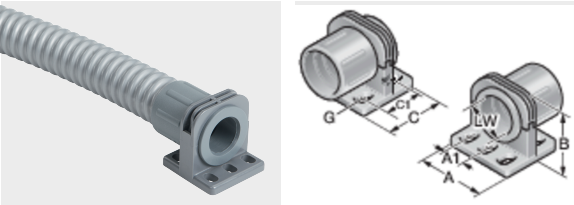

| Article | Order No. | Color | A mm | B mm | C mm | A1 mm | C1 mm | PU pcs. |
|-----------|-----------|-------|------|------|------|-------|-------|---------|
| USH/D P16 | 83641210 | Gray | 38 | 40 | 38 | 13 | 23 | 50 |
| USH/D P21 | 83641212 | Gray | 38 | 40 | 38 | 13 | 23 | 50 |
| USH/D P29 | 83641214 | Gray | 46 | 48 | 38 | 17.5 | 26 | 50 |
| USH/D P29 | 83641250 | Black | 46 | 48 | 38 | 17.5 | 26 | 50 |
| USH/D P36 | 83641216 | Gray | 52 | 59 | 60 | 20 | 48 | 10 |
| USH/D P48 | 83641218 | Gray | 68 | 77 | 60 | 27.5 | 47 | 10 |

Material properties

Polycarbonate II

Thermal properties

Temperature / temperature range -40 °C – 110 °C / short term: 140 °C



Type USH/D

Fire properties



Fire classification acc. to UL94: V2 self-extinguishing

Chemical resistances



Resistant to: Weak acids | Yes | Fuels | Alcohol | Mineral oils

Technical information



Halogen-free

Conformity



RoHS (EC Directive 2011/65/EU)

Classification



ETIM 9: EC000368 || eClass 14: 27430315 || UNSPSC: 31162814 ||