



Blanking plate (plastic)




Product information


The blanking plates are suited for sealing cut-outs for 16- or 24-pole connectors.

- Integrated seal
- BP/N can be snap-fitted or screw-fastened
- BP/H snap-fit assembly

Information, conformities and approvals

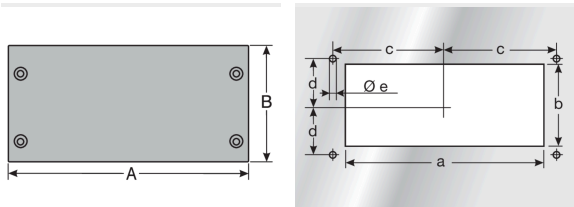

Article	Order No.	Color	Material Plate	PU pcs.
Reinforced version				
BP/G 16	87171630	Black	mod. polyamide PA 6.6	10
High design, latchable from plate thickness 1.5-2.0 mm				
BP/N 24	87171624	Black		1
Flexible version				
BP/H 24	87171626	Black		1

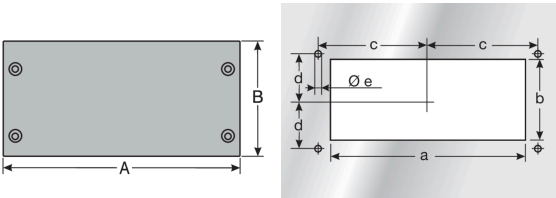

Article	Order No.	Installation height mm	A mm	B mm	a mm	b mm	c mm	d mm	e mm
---------	-----------	------------------------	------	------	------	------	------	------	------

Reinforced version



Blanking plate (plastic)

Article	Order No.	Installation height mm	A mm	B mm	a mm	b mm	c mm	d mm	e mm
BP/G 16	87171630	8	121	58	86	36	51.5	16	5.5

High design, latchable from plate thickness 1.5-2.0 mm

BP/N 24	87171624	15.5	146	58	112	36	65	16	5.5
---------	----------	------	-----	----	-----	----	----	----	-----

Flexible version

BP/H 24	87171626	4.5	146	48	112	36	65	16	5.5
---------	----------	-----	-----	----	-----	----	----	----	-----

Material properties



Polyamide 6.6 || Thermoplastic elastomer (TPE) ||

Thermal properties



Temperature / temperature range -40 °C - 125 °C

Protection class



Protection class IP54 BP/G: IP65 BP/N: IP42 BP/H:

Fire properties



Fire classification V0HB BP/G, BP/N: BP/H:

Technical information



According to ISO 4892-2

Conformity



RoHS (EC Directive 2011/65/EU)

Approvals and operating permits



GL approval



Blanking plate (plastic)

Classification



ETIM 9: EC002624 || eClass 14: 27182815 || UNSPSC: 39121312 ||

General information



Made in Germany