




Product designation	Power contactor		
Product type designation	BF80		
<b>Contact characteristics</b>			
Number of poles	Nr.	3	
Rated insulation voltage $U_i$ IEC/EN	V	1000	
Rated impulse withstand voltage $U_{imp}$	kV	8	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current $I_{th}$	A	115	
Operational current $I_e$			
	AC-1 ( $\leq 40^\circ C$ )	A	115
	AC-1 ( $\leq 55^\circ C$ )	A	95
	AC-1 ( $\leq 70^\circ C$ )	A	80
	AC-3 ( $\leq 440V \leq 55^\circ C$ )	A	80
	AC-4 (400V)	A	38
Rated operational power AC-3 ( $T \leq 55^\circ C$ )	230V	kW	22
	400V	kW	45
	415V	kW	45
	440V	kW	45
	500V	kW	55
	690V	kW	55
	1000V	kW	37
Rated operational current AC-3 ( $T \leq 55^\circ C$ )	230V	A	80
	400V	A	80
	415V	A	80
	440V	A	80
	500V	A	78
	690V	A	57
	1000V	A	28
Rated operational power AC-1 ( $T \leq 40^\circ C$ )	230V	kW	43
	400V	kW	76
	500V	kW	95
	690V	kW	120
IEC max current $I_e$ in DC1 with $L/R \leq 1ms$ with 1 poles in series	$\leq 24V$	A	70
	48V	A	60
	75V	A	60
	110V	A	8
	220V	A	—
IEC max current $I_e$ in DC1 with $L/R \leq 1ms$ with 2 poles in series	$\leq 24V$	A	100

	48V	A	100
	75V	A	100
	110V	A	80
	220V	A	9
IEC max current le in DC1 with L/R ≤ 1ms with 3 poles in series			
	≤24V	A	100
	48V	A	100
	75V	A	100
	110V	A	85
	220V	A	95
IEC max current le in DC1 with L/R ≤ 1ms with 4 poles in series			
	≤24V	A	100
	48V	A	100
	75V	A	100
	110V	A	100
	220V	A	115
IEC max current le in DC3-DC5 with L/R ≤ 15ms with 1 poles in series			
	≤24V	A	40
	48V	A	30
	75V	A	30
	110V	A	3
	220V	A	—
IEC max current le in DC3-DC5 with L/R ≤ 15ms with 2 poles in series			
	≤24V	A	60
	48V	A	50
	75V	A	50
	110V	A	40
	220V	A	5
IEC max current le in DC3-DC5 with L/R ≤ 15ms with 3 poles in series			
	≤24V	A	80
	48V	A	70
	75V	A	70
	110V	A	60
	220V	A	64
IEC max current le in DC3-DC5 with L/R ≤ 15ms with 4 poles in series			
	≤24V	A	90
	48V	A	90
	75V	A	90
	110V	A	75
	220V	A	80
Short-time allowable current for 10s (IEC/EN60947-1)		A	640
Protection fuse			
	gG (IEC)	A	125
	aM (IEC)	A	80
Making capacity (RMS value)		A	800
Breaking capacity at voltage			
	440V	A	640
	500V	A	625
	690V	A	456
Resistance per pole (average value)		mΩ	0.6
Power dissipation per pole (average value)			
	I <sub>th</sub>	W	7.9
	AC-3	W	3.8
Tightening torque for terminals			


	min	Nm	4
	max	Nm	5
	min	Ibin	2.95
	max	Ibin	3.69
Tightening torque for coil terminal			
	min	Nm	0.8
	max	Nm	1
	min	Ibin	0.8
	max	Ibin	0.74
Max number of wires simultaneously connectable		Nr.	2
Conductor section			
AWG/Kcmil	max		2
Flexible w/o lug conductor section			
	min	mm <sup>2</sup>	1.5
	max	mm <sup>2</sup>	35
Flexible c/w lug conductor section			
	min	mm <sup>2</sup>	1.5
	max	mm <sup>2</sup>	35
Power terminal protection according to IEC/EN 60529			IP20 front
Mechanical features			
Operating position	normal allowable		Vertical plan ±30°
Fixing			Screw / DIN rail 35mm
Weight	g	1020	
Operations			
Mechanical life	cycles	15000000	
Electrical life	cycles	1300000	
Safety related data			
Performance level B10d according to EN/ISO 13489-1			
	rated load mechanical load	cycles	1300000 15000000
EMC compatibility			yes
AC coil operating			
Rated AC voltage at 50/60Hz	V	400	
AC operating voltage			
of 50/60Hz coil powered at 50Hz			
pick-up			
	min	%Us	80
	max	%Us	110
drop-out			
	min	%Us	20
	max	%Us	55
of 50/60Hz coil powered at 60Hz			
pick-up			
	min	%Us	85
	max	%Us	110
drop-out			
	min	%Us	40
	max	%Us	55
AC average coil consumption at 20°C			
of 50/60Hz coil powered at 50Hz			

	in-rush holding	VA VA	210 15	
of 50/60Hz coil powered at 60Hz				
	in-rush holding	VA VA	195 13	
of 60Hz coil powered at 60Hz				
	in-rush holding	VA VA	210 15	
Dissipation at holding $\leq 20^{\circ}\text{C}$ 50Hz		W	5	
<b>Max cycles frequency</b>				
Mechanical operation		cycles/h	3600	
<b>Operating times</b>				
Average time for Us control in AC	Closing NO	min max	ms ms	12 28
	Opening NO	min max	ms ms	8 22
in DC				
	Closing NO	min max	ms ms	40 85
	Opening NO	min max	ms ms	20 55
<b>UL technical data</b>				
Rated operational voltage AC (UL)			V	600
Full-load current (FLA) for three-phase AC motor		at 480V at 600V	A	77 77
<b>Yielded mechanical performance</b>				
for three-phase AC motor		200/208V 220/230V 460/480V 575/600V	HP	25 30 60 75
<b>General USE</b>				
Contactor		AC current	A	115
Short-circuit protection fuse, 600V High fault		Short circuit current Fuse rating Fuse class	kA A J	100 200 RK5
Standard fault		Short circuit current Fuse rating Fuse class	kA A RK5	10 200 -50
<b>Ambient conditions</b>				
Temperature	Operating temperature	min	°C	-50

	max	°C	70
Storage temperature	min	°C	-60
	max	°C	80
Max altitude	m		3000
Resistance & Protection			
Pollution degree			3
Dimensions			

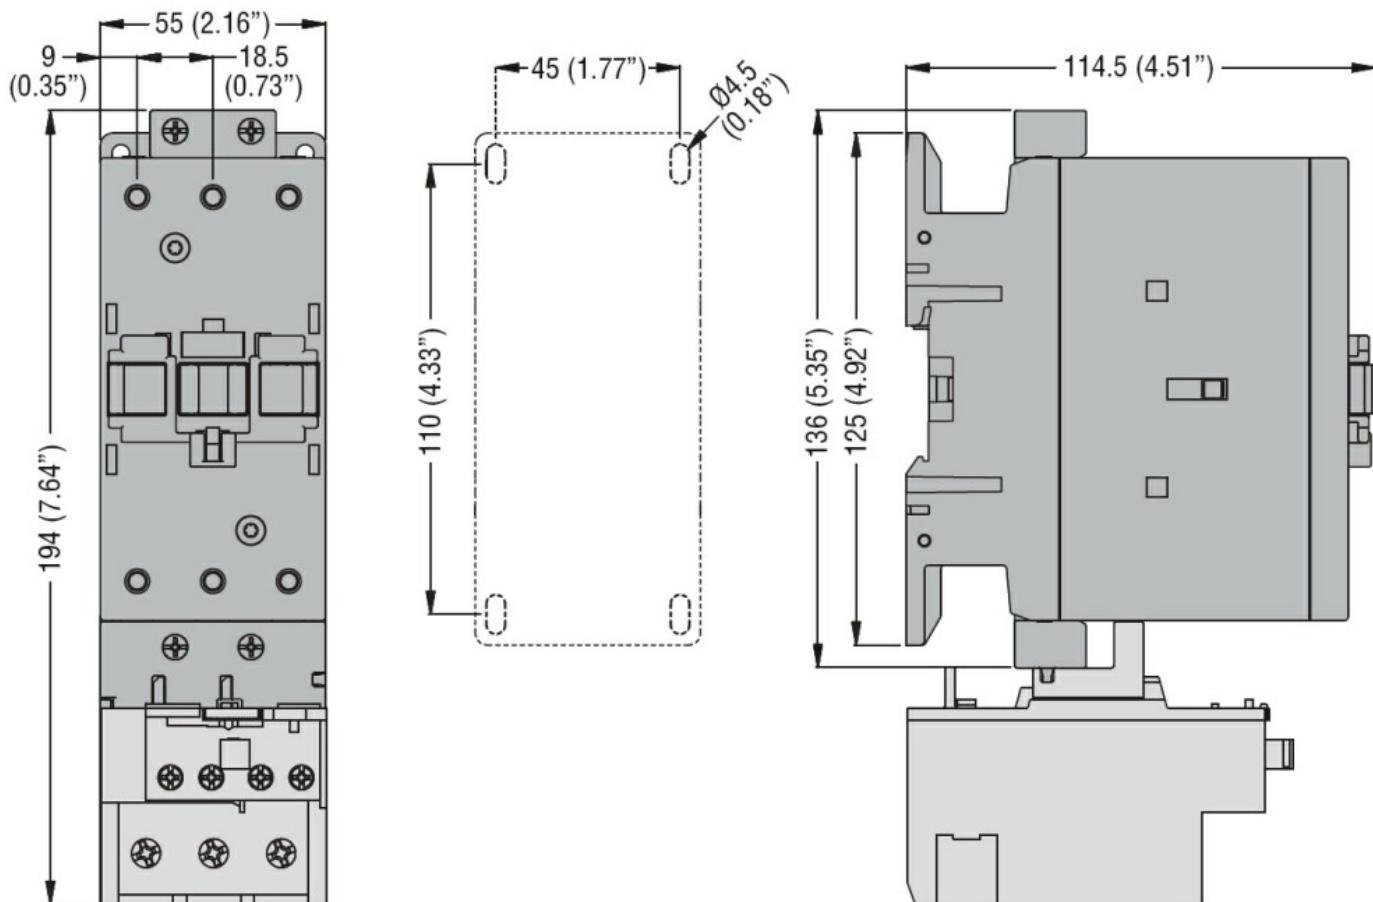

#### Wiring diagrams

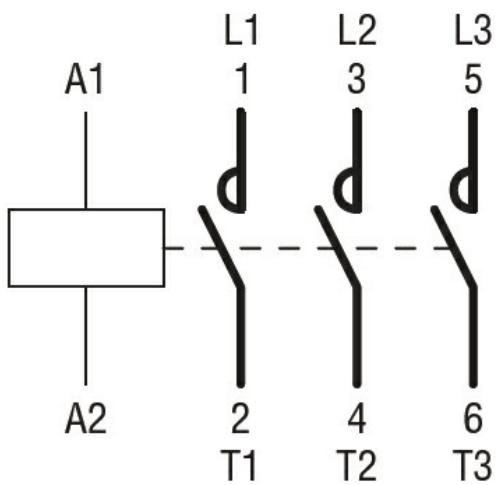

#### Certifications and compliance

##### Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN/BS 60947-1

IEC/EN/BS 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

ETIM classification

ETIM 8.0

EC000066 -  
Power contactor,  
AC switching