



Product designation	Power contactor		
Product type designation	BF95		
Contact characteristics			
Number of poles	Nr.	3	
Rated insulation voltage Ui IEC/EN	V	1000	
Rated impulse withstand voltage $Uimp$	kV	8	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current Ith		A	140
Operational current le			
	AC-1 ($\leq 40^{\circ}\text{C}$)	A	140
	AC-1 ($\leq 55^{\circ}\text{C}$)	A	115
	AC-1 ($\leq 70^{\circ}\text{C}$)	A	100
	AC-3 ($\leq 440\text{V} \leq 55^{\circ}\text{C}$)	A	95
	AC-4 (400V)	A	45
Rated operational power AC-3 ($T \leq 55^{\circ}\text{C}$)	230V	kW	30
	400V	kW	55
	415V	kW	55
	440V	kW	55
	500V	kW	75
	690V	kW	90
	1000V	kW	45
Rated operational current AC-3 ($T \leq 55^{\circ}\text{C}$)	230V	A	95
	400V	A	95
	415V	A	95
	440V	A	95
	500V	A	95
	690V	A	93
	1000V	A	33
IEC max current le in DC1 with $L/R \leq 1\text{ms}$ with 1 poles in series	$\leq 24\text{V}$	A	140
	48V	A	140
	75V	A	100
	110V	A	10
	220V	A	—
IEC max current le in DC1 with $L/R \leq 1\text{ms}$ with 2 poles in series	$\leq 24\text{V}$	A	140
	48V	A	140
	75V	A	140
	110V	A	110
	220V	A	12
IEC max current le in DC1 with $L/R \leq 1\text{ms}$ with 3 poles in series			

	≤24V	A	140
	48V	A	140
	75V	A	155
	110V	A	120
	220V	A	125
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 4 poles in series	≤24V	A	140
	48V	A	140
	75V	A	155
	110V	A	140
	220V	A	140
IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 1 poles in series	≤24V	A	140
	48V	A	44
	75V	A	36
	110V	A	6
	220V	A	—
IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 2 poles in series	≤24V	A	140
	48V	A	63
	75V	A	60
	110V	A	55
	220V	A	7
IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 3 poles in series	≤24V	A	140
	48V	A	115
	75V	A	90
	110V	A	85
	220V	A	76
IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 4 poles in series	≤24V	A	140
	48V	A	110
	75V	A	110
	110V	A	105
	220V	A	95
Short-time allowable current for 10s (IEC/EN60947-1)		A	760
Protection fuse			
	gG (IEC)	A	160
	aM (IEC)	A	100
Making capacity (RMS value)		A	1200
Breaking capacity at voltage			
	440V	A	1100
	500V	A	775
	690V	A	745
Resistance per pole (average value)		$\text{m}\Omega$	0.45
Power dissipation per pole (average value)			
	I _{th}	W	8.8
	AC-3	W	4.1
Tightening torque for terminals			
	min	Nm	6
	max	Nm	7
	min	I _{bin}	4.4
	max	I _{bin}	5.2

Tightening torque for coil terminal

min	Nm	0.8
max	Nm	1
min	lbin	0.59
max	lbin	0.74

Conductor section

AWG/Kcmil	max	2/0
Flexible w/o lug conductor section	min	mm ² 1.5
	max	mm ² 70
Flexible c/w lug conductor section	min	mm ² 1.5
	max	mm ² 70

Power terminal protection according to IEC/EN 60529

IP20 front

Mechanical features

Operating position

normal	Vertical plan
allowable	±30°

Fixing

Screw / DIN rail
35mm

Weight

g 2020

Auxiliary contact characteristics

Thermal current I_{th} A 140

Operations

Mechanical life cycles 15000000

Electrical life cycles 1400000

Safety related data

Performance level B10d according to EN/ISO 13489-1

rated load	cycles	1400000
mechanical load	cycles	15000000

AC coil operating

Rated AC voltage at 50/60Hz V 400

AC operating voltage


of 50/60Hz coil powered at 50Hz	pick-up	min	%Us	80
		max	%Us	110
drop-out		min	%Us	20
		max	%Us	55

of 50/60Hz coil powered at 60Hz	pick-up	min	%Us	85
		max	%Us	110
drop-out		min	%Us	40
		max	%Us	55


AC average coil consumption at 20°C

of 50/60Hz coil powered at 50Hz	in-rush	VA	300
	holding	VA	20
of 50/60Hz coil powered at 60Hz	in-rush	VA	275

of 60Hz coil powered at 60Hz	holding	VA	17
	in-rush	VA	300
	holding	VA	20
Dissipation at holding \leq 20°C 50Hz		W	6.5
Max cycles frequency			
Mechanical operation		cycles/h	1500
Operating times			
Average time for Us control in AC			
	Closing NO		
		min	ms 16
		max	ms 32
	Opening NO		
		min	ms 9
		max	ms 24
UL technical data			
Rated operational voltage AC (UL)		V	600
Yielded mechanical performance for three-phase AC motor			
	200/208V	HP	30
	220/230V	HP	30
	460/480V	HP	60
	575/600V	HP	75
General USE			
Contactor		AC current	A 150
Short-circuit protection fuse, 600V High fault		Short circuit current	kA 100
		Fuse rating	A 200
		Fuse class	J
Standard fault		Short circuit current	kA 10
		Fuse rating	A 250
		Fuse class	RK5
Ambient conditions			
Temperature	Operating temperature	min	°C -50
		max	°C 70
Storage temperature	min	°C -60	
	max	°C +80	
Max altitude		m	3000
Dimensions			

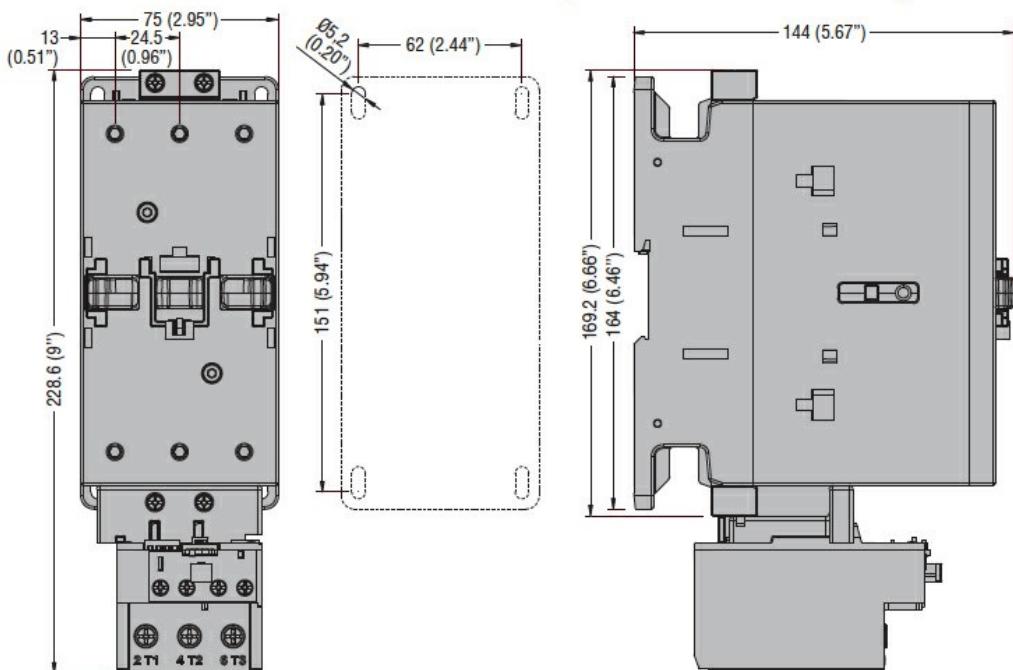

Wiring diagrams

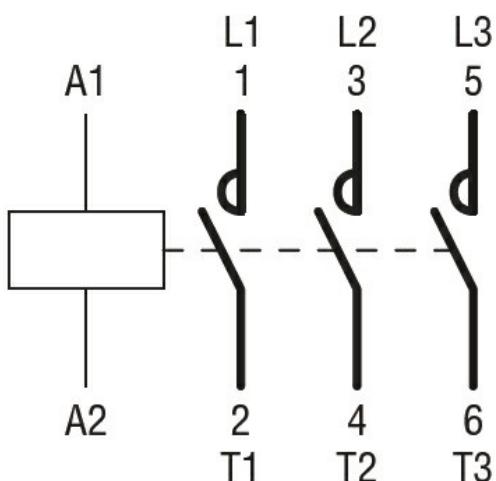

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN/BS 60947-1

IEC/EN/BS 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching