



| | | | |
|---|---|------|-----|
| Product designation | Power contactor | | |
| Product type designation | B400 | | |
| Contact characteristics | | | |
| Number of poles | Nr. | 4 | |
| Rated insulation voltage Ui IEC/EN | V | 1000 | |
| Rated impulse withstand voltage Uimp | kV | 8 | |
| Operational frequency | min | Hz | 25 |
| | max | Hz | 400 |
| IEC Conventional free air thermal current Ith | | A | 550 |
| Operational current Ie | | | |
| | AC-1 ($\leq 40^{\circ}\text{C}$) | A | 550 |
| | AC-1 ($\leq 55^{\circ}\text{C}$) | A | 430 |
| | AC-1 ($\leq 70^{\circ}\text{C}$) | A | 360 |
| | AC-3 ($\leq 440\text{V} \leq 55^{\circ}\text{C}$) | A | 420 |
| | AC-4 (400V) | A | 200 |
| Rated operational power AC-1 ($T \leq 40^{\circ}\text{C}$) | | | |
| | 230V | kW | 200 |
| | 400V | kW | 345 |
| | 500V | kW | 452 |
| | 690V | kW | 598 |
| IEC max current Ie in DC1 with $L/R \leq 1\text{ms}$ with 1 poles in series | | | |
| | 75V | A | 400 |
| | 110V | A | 250 |
| | 220V | A | -- |
| | 330V | A | -- |
| | 460V | A | -- |
| IEC max current Ie in DC1 with $L/R \leq 1\text{ms}$ with 2 poles in series | | | |
| | 75V | A | 400 |
| | 110V | A | 400 |
| | 220V | A | 350 |
| | 330V | A | -- |
| | 460V | A | -- |
| IEC max current Ie in DC1 with $L/R \leq 1\text{ms}$ with 3 poles in series | | | |
| | 75V | A | 400 |
| | 110V | A | 400 |
| | 220V | A | 400 |
| | 330V | A | 350 |
| | 460V | A | -- |
| IEC max current Ie in DC1 with $L/R \leq 1\text{ms}$ with 4 poles in series | | | |
| | 75V | A | 400 |
| | 110V | A | 400 |
| | 220V | A | 400 |
| | 330V | A | 400 |
| | 460V | A | 350 |

IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 1 poles in series

| | | |
|------|---|-----|
| 75V | A | 350 |
| 110V | A | 200 |
| 220V | A | -- |
| 330V | A | -- |
| 460V | A | -- |

IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 2 poles in series

| | | |
|------|---|-----|
| 75V | A | 350 |
| 110V | A | 350 |
| 220V | A | 280 |
| 330V | A | -- |
| 460V | A | -- |

IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 3 poles in series

| | | |
|------|---|-----|
| 75V | A | 350 |
| 110V | A | 350 |
| 220V | A | 350 |
| 330V | A | 280 |
| 460V | A | -- |

IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 4 poles in series

| | | |
|------|---|-----|
| 75V | A | 350 |
| 110V | A | 350 |
| 220V | A | 350 |
| 330V | A | 280 |
| 460V | A | 280 |

Short-time allowable current for 10s (IEC/EN60947-1) A 3600

Protection fuse

| | | |
|----------|---|-----|
| gG (IEC) | A | 630 |
| aM (IEC) | A | 400 |

Making capacity (RMS value) A 4200

Breaking capacity at voltage

| | | |
|------|---|------|
| 440V | A | 4000 |
| 500V | A | 3400 |
| 690V | A | 3360 |

Resistance per pole (average value) $\text{m}\Omega$ 0.2

Power dissipation per pole (average value)

| | | |
|-----------------|---|----|
| I _{th} | W | 52 |
| AC-3 | W | 32 |

Tightening torque for terminals

| | | |
|-----|------------------|------|
| min | Nm | 35 |
| max | Nm | 35 |
| min | I _{bin} | 25.8 |
| max | I _{bin} | 25.8 |

Tightening torque for coil terminal

| | | |
|-----|------------------|------|
| min | Nm | 1 |
| max | Nm | 1 |
| min | I _{bin} | 0.74 |
| max | I _{bin} | 0.74 |

Max number of wires simultaneously connectable Nr. 2

Conductor section

AWG/Kcmil

max 2x 300 kcmil

Power terminal protection according to IEC/EN 60529 IP00

Mechanical features

Operating position

| | normal allowable | Vertical plan ±30° |
|---------------------|---------------------|-----------------------|
| Fixing | | Screw |
| Weight | g | 1112 |
| Operations | | |
| Mechanical life | cycles | 10000000 |
| Electrical life | cycles | 700000 |
| Safety related data | | |

Performance level B10d according to EN/ISO 13489-1

| | | |
|-----------------|--------|----------|
| rated load | cycles | 700000 |
| mechanical load | cycles | 10000000 |

Mirror contacts according to IEC/EN 609474-4-1 Yes

EMC compatibility yes

AC coil operating

Rated AC voltage at 50/60Hz, 60Hz

| | | |
|-----|---|-----|
| min | V | 220 |
| max | V | 240 |

AC operating voltage

 of 50/60Hz coil powered at 50Hz
 pick-up

| | | |
|-----|-----|-----|
| min | %Us | 80 |
| max | %Us | 110 |

drop-out

| | | |
|-----|-----|----|
| min | %Us | 20 |
| max | %Us | 60 |

 of 50/60Hz coil powered at 60Hz
 pick-up

| | | |
|-----|-----|-----|
| min | %Us | 80 |
| max | %Us | 110 |

drop-out

| | | |
|-----|-----|----|
| min | %Us | 20 |
| max | %Us | 60 |

 of 60Hz coil powered at 60Hz
 pick-up

| | | |
|-----|-----|-----|
| min | %Us | 80 |
| max | %Us | 110 |

drop-out

| | | |
|-----|-----|----|
| min | %Us | 20 |
| max | %Us | 60 |

AC average coil consumption at 20°C

of 50/60Hz coil powered at 50Hz

| | | |
|---------|----|-----|
| in-rush | VA | 300 |
| holding | VA | 10 |

of 50/60Hz coil powered at 60Hz

| | | |
|---------|----|-----|
| in-rush | VA | 300 |
| holding | VA | 10 |

Dissipation at holding ≤20°C 50Hz

W 10

DC coil operating

DC rated control voltage

| | | |
|-----|---|-----|
| min | V | 220 |
| max | V | 240 |

DC operating voltage


| | | | |
|--|-----------------------|--------------------|------|
| pick-up | min | %Us | 80 |
| | max | %Us | 110 |
| drop-out | min | %Us | 20 |
| | max | %Us | 60 |
| Average coil consumption $\leq 20^{\circ}\text{C}$ | | | |
| | in-rush | W | 300 |
| | holding | W | 10 |
| Max cycles frequency | | | |
| Mechanical operation | | cycles/h | 2400 |
| Operating times | | | |
| Average time for Us control | | | |
| in AC | | | |
| Closing NO | min | ms | 80 |
| | max | ms | 120 |
| Opening NO | min | ms | 30 |
| | max | ms | 75 |
| in DC | | | |
| Closing NO | min | ms | 80 |
| | max | ms | 120 |
| Opening NO | min | ms | 30 |
| | max | ms | 75 |
| UL technical data | | | |
| Rated operational voltage AC (UL) | | V | 600 |
| Full-load current (FLA) for three-phase AC motor | | | |
| | at 480V | A | 414 |
| | at 600V | A | 382 |
| Yielded mechanical performance | | | |
| for three-phase AC motor | | | |
| | 200/208V | HP | 125 |
| | 220/230V | HP | 150 |
| | 460/480V | HP | 350 |
| | 575/600V | HP | 400 |
| General USE | | | |
| Contactor | | | |
| | AC current | A | 550 |
| Short-circuit protection fuse, 600V | | | |
| Standard fault | | | |
| | Short circuit current | kA | 18 |
| | Fuse rating | A | 800 |
| | Fuse class | L | |
| Ambient conditions | | | |
| Temperature | | | |
| Operating temperature | | | |
| | min | $^{\circ}\text{C}$ | -50 |
| | max | $^{\circ}\text{C}$ | 70 |
| Storage temperature | | | |
| | min | $^{\circ}\text{C}$ | -60 |
| | max | $^{\circ}\text{C}$ | 80 |

Max altitude m 3000


Resistance & Protection

Pollution degree 3

Dimensions

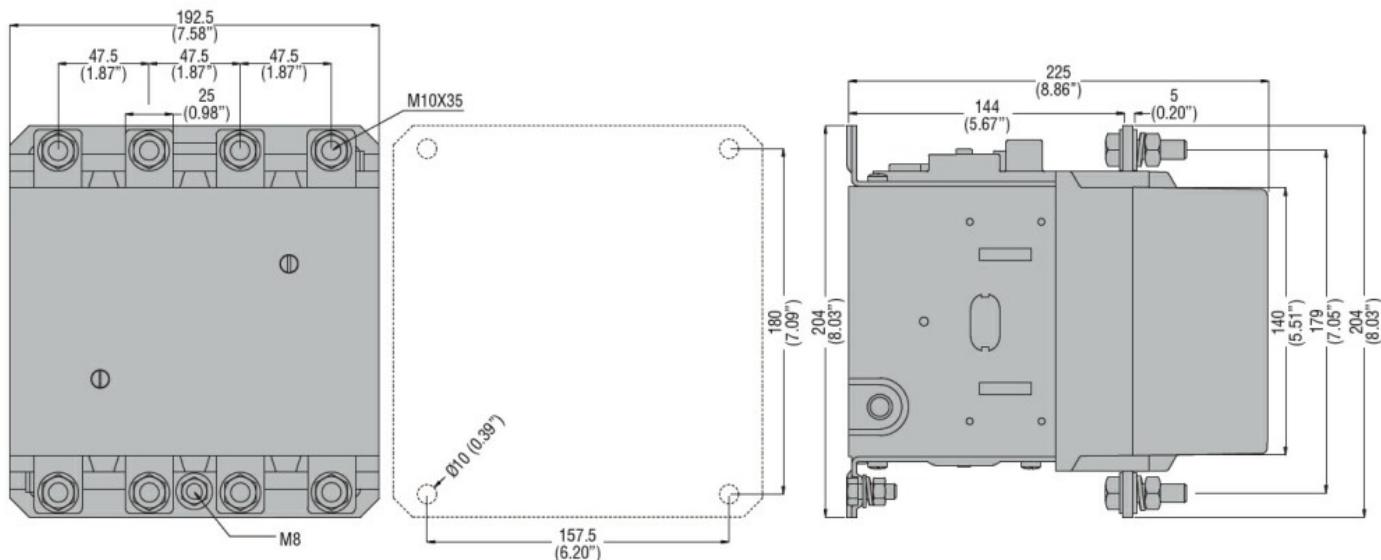

Wiring diagrams

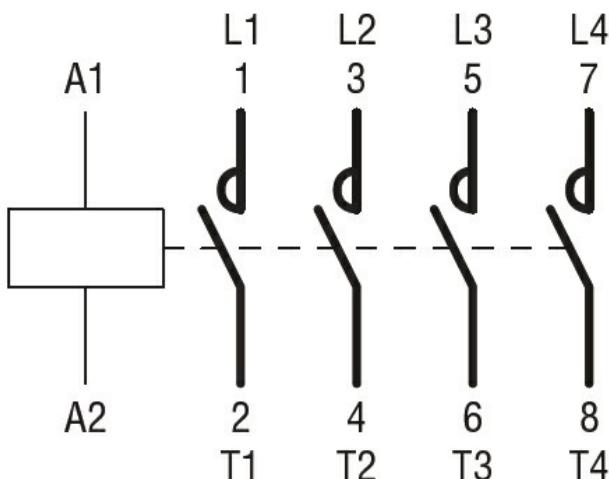

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching