



Product designation	Power contactor		
Product type designation	B250		
Contact characteristics			
Number of poles	Nr.	3	
Rated insulation voltage U_i IEC/EN	V	1000	
Rated impulse withstand voltage U_{imp}	kV	8	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current I_{th}		A	350
Operational current I_e			
	AC-1 ($\leq 40^\circ C$)	A	350
	AC-1 ($\leq 55^\circ C$)	A	300
	AC-1 ($\leq 70^\circ C$)	A	250
	AC-3 ($\leq 440V \leq 55^\circ C$)	A	265
	AC-4 (400V)	A	115
Rated operational power AC-3 ($T \leq 55^\circ C$)			
	230V	kW	83
	400V	kW	140
	415V	kW	155
	440V	kW	164
	500V	kW	176
	690V	kW	212
	1000V	kW	156
Rated operational power AC-1 ($T \leq 40^\circ C$)			
	230V	kW	124
	400V	kW	214
	500V	kW	282
	690V	kW	380
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 1 poles in series			
	75V	A	350
	110V	A	160
	220V	A	--
	330V	A	--
	460V	A	--
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 2 poles in series			
	75V	A	350
	110V	A	300
	220V	A	250
	330V	A	--
	460V	A	--
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 3 poles in series			
	75V	A	350
	110V	A	300
	220V	A	300

	330V	A	250
	460V	A	--
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 4 poles in series			
	75V	A	350
	110V	A	300
	220V	A	300
	330V	A	300
	460V	A	250
IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 1 poles in series			
	75V	A	280
	110V	A	150
	220V	A	--
	330V	A	--
	460V	A	--
IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 2 poles in series			
	75V	A	280
	110V	A	250
	220V	A	200
	330V	A	--
	460V	A	--
IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 3 poles in series			
	75V	A	280
	110V	A	280
	220V	A	250
	330V	A	200
	460V	A	--
IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 4 poles in series			
	75V	A	280
	110V	A	280
	220V	A	280
	330V	A	200
	460V	A	200
Short-time allowable current for 10s (IEC/EN60947-1)			A 2200
Protection fuse			
	gG (IEC)	A	400
	aM (IEC)	A	250
Making capacity (RMS value)			A 2750
Breaking capacity at voltage			
	440V	A	2500
	500V	A	2250
	690V	A	2200
Resistance per pole (average value)			$\text{m}\Omega$ 0.2
Power dissipation per pole (average value)			
	I _{th}	W	24.5
	AC-3	W	12.5
Tightening torque for terminals			
	min	Nm	35
	max	Nm	35
	min	Ibin	25.8
	max	Ibin	25.8
Tightening torque for coil terminal			
	min	Nm	1
	max	Nm	1

	min	Ibin	0.74		
	max	Ibin	0.74		
Max number of wires simultaneously connectable	Nr. 2				
Conductor section	AWG/Kcmil				
	max	500 kcmil			
Power terminal protection according to IEC/EN 60529	IP00				
Mechanical features					
Operating position	normal allowable	Vertical plan ±30°			
Fixing	Screw				
Weight	g	9550			
Operations					
Mechanical life	cycles	10000000			
Electrical life	cycles	1000000			
Safety related data					
Performance level B10d according to EN/ISO 13489-1	rated load mechanical load	cycles	1000000		
		cycles	10000000		
Mirror contacts according to IEC/EN 609474-4-1	Yes				
EMC compatibility	yes				
AC coil operating					
Rated AC voltage at 50/60Hz, 60Hz	min max	V V	380 415		
AC operating voltage					
of 50/60Hz coil powered at 50Hz					
pick-up	min max	%Us %Us	80 110		
drop-out	min max	%Us %Us	20 60		
of 50/60Hz coil powered at 60Hz					
pick-up	min max	%Us %Us	80 110		
drop-out	min max	%Us %Us	20 60		
of 60Hz coil powered at 60Hz					
pick-up	min max	%Us %Us	80 110		
drop-out	min max	%Us %Us	20 60		
AC average coil consumption at 20°C					
of 50/60Hz coil powered at 50Hz	in-rush holding	VA VA	300 10		
of 50/60Hz coil powered at 60Hz					

Dissipation at holding $\leq 20^{\circ}\text{C}$ 50Hz	in-rush holding	VA	300
DC coil operating	VA	10	
DC rated control voltage	W	10	
DC operating voltage	min	V	380
	max	V	415
pick-up	min	%Us	80
	max	%Us	110
drop-out	min	%Us	20
	max	%Us	60
Average coil consumption $\leq 20^{\circ}\text{C}$	in-rush holding	W	300
		W	10
Max cycles frequency	cycles/h	2400	
Mechanical operation			
Operating times			
Average time for Us control			
in AC			
Closing NO	min	ms	80
	max	ms	120
Opening NO	min	ms	30
	max	ms	75
in DC			
Closing NO	min	ms	80
	max	ms	120
Opening NO	min	ms	30
	max	ms	75
UL technical data			
Rated operational voltage AC (UL)	V	600	
Full-load current (FLA) for three-phase AC motor			
	at 480V	A	240
	at 600V	A	242
Yielded mechanical performance			
for three-phase AC motor			
	200/208V	HP	75
	220/230V	HP	100
	575/600V	HP	250
General USE			
Contactor			
	AC current	A	350
Short-circuit protection fuse, 600V			
Standard fault			
	Short circuit current	kA	18
	Fuse rating	A	800
	Fuse class	L	
Ambient conditions			

Temperature

Operating temperature

	min	°C	-50
	max	°C	70

Storage temperature

	min	°C	-60
	max	°C	80

Max altitude


m 3000

Resistance & Protection


Pollution degree

3

Dimensions

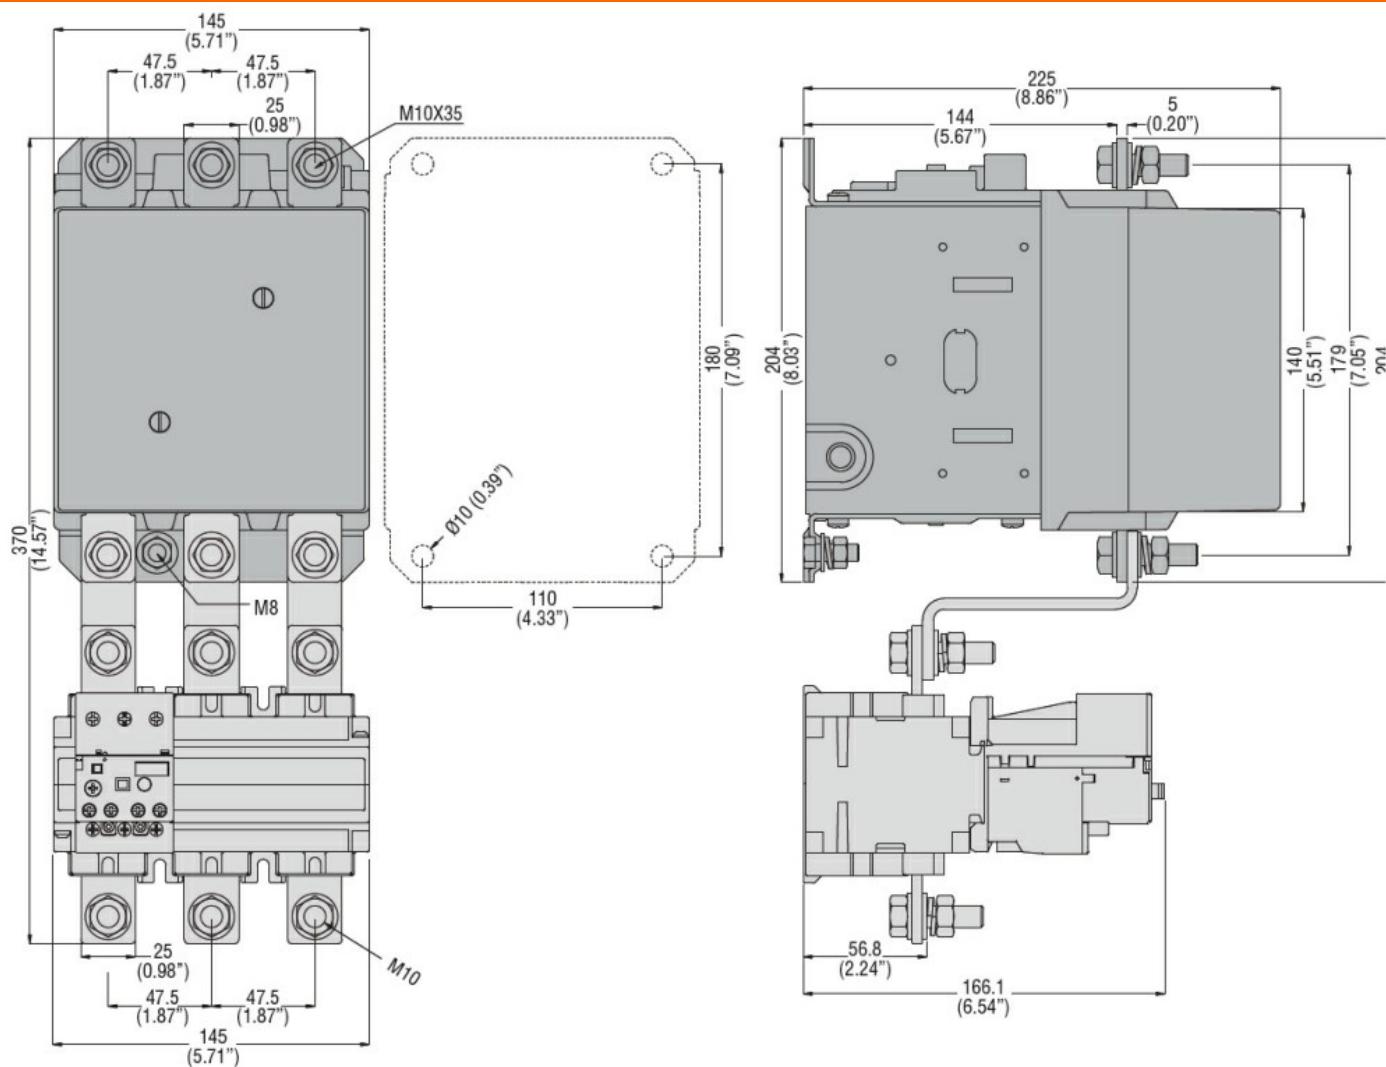

Wiring diagrams

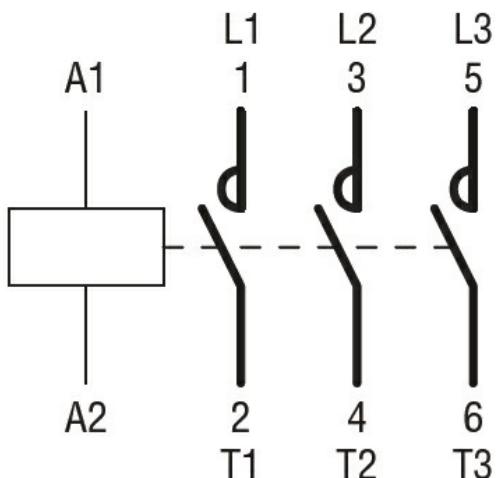

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching