



Product designation	Power contactor		
Product type designation	BF40		
<b>Contact characteristics</b>			
Number of poles	Nr.	4	
Rated insulation voltage U <sub>i</sub> IEC/EN	V	1000	
Rated impulse withstand voltage U <sub>imp</sub>	kV	8	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current I <sub>th</sub>		A	70
Operational current I <sub>e</sub>	AC-1 ( $\leq 40^{\circ}\text{C}$ ) A 70 AC-1 ( $\leq 55^{\circ}\text{C}$ ) A 60 AC-1 ( $\leq 70^{\circ}\text{C}$ ) A 50 AC-3 ( $\leq 440\text{V} \leq 55^{\circ}\text{C}$ ) A 40 AC-4 (400V) A 24		
Rated operational current AC-3 ( $T \leq 55^{\circ}\text{C}$ )	230V A 40 400V A 40 415V A 40 440V A 40 500V A 33 690V A 32 1000V A 21		
Rated operational power AC-1 ( $T \leq 40^{\circ}\text{C}$ )	230V kW 26 400V kW 46 500V kW 58 690V kW 79		
IEC max current I <sub>e</sub> in DC1 with L/R $\leq 1\text{ms}$ with 1 poles in series	$\leq 24\text{V}$ A 40 48V A 35 75V A 30 110V A 8 220V A –		
IEC max current I <sub>e</sub> in DC1 with L/R $\leq 1\text{ms}$ with 2 poles in series	$\leq 24\text{V}$ A 48 48V A 48 75V A 45 110V A 42 220V A 5		
IEC max current I <sub>e</sub> in DC1 with L/R $\leq 1\text{ms}$ with 3 poles in series	$\leq 24\text{V}$ A 48 48V A 48 75V A 48		

	110V	A	44
	220V	A	56
IEC max current $I_e$ in DC1 with $L/R \leq 1\text{ms}$ with 4 poles in series			
	$\leq 24V$	A	—
	48V	A	—
	75V	A	—
	110V	A	—
	220V	A	70
IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 1 poles in series			
	$\leq 24V$	A	27
	48V	A	23
	75V	A	19
	110V	A	3
	220V	A	—
IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 2 poles in series			
	$\leq 24V$	A	32
	48V	A	30
	75V	A	27
	110V	A	22
	220V	A	5
IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 3 poles in series			
	$\leq 24V$	A	40
	48V	A	40
	75V	A	38
	110V	A	27
	220V	A	32
IEC max current $I_e$ in DC3-DC5 with $L/R \leq 15\text{ms}$ with 4 poles in series			
	$\leq 24V$	A	—
	48V	A	—
	75V	A	—
	110V	A	—
	220V	A	40
Short-time allowable current for 10s (IEC/EN60947-1)			A 400
Protection fuse			
	gG (IEC)	A	100
	aM (IEC)	A	50
Making capacity (RMS value)			A 400
Breaking capacity at voltage			
	440V	A	320
	500V	A	265
	690V	A	256
Resistance per pole (average value)			$\text{m}\Omega$ 0.8
Power dissipation per pole (average value)			
	I <sub>th</sub>	W	3.9
	AC-3	W	1.3
Tightening torque for terminals			
	min	Nm	4
	max	Nm	5
	min	I <sub>bin</sub>	2.95
	max	I <sub>bin</sub>	3.69
Tightening torque for coil terminal			
	min	Nm	0.8
	max	Nm	1

	min	I <sub>bin</sub>	0.8		
	max	I <sub>bin</sub>	0.74		
Max number of wires simultaneously connectable	Nr. 2				
Conductor section					
AWG/Kcmil	max		2		
Flexible w/o lug conductor section	min	mm <sup>2</sup>	1.5		
	max	mm <sup>2</sup>	35		
Flexible c/w lug conductor section	min	mm <sup>2</sup>	1.5		
	max	mm <sup>2</sup>	35		
Power terminal protection according to IEC/EN 60529	IP20 front				
<b>Mechanical features</b>					
Operating position	normal allowable	Vertical plan ±30°			
Fixing	Screw / DIN rail 35mm				
Weight	g	1240			
<b>Operations</b>					
Mechanical life	cycles	15000000			
Electrical life	cycles	1500000			
<b>Safety related data</b>					
Performance level B10d according to EN/ISO 13489-1	rated load	cycles	1500000		
	mechanical load	cycles	15000000		
EMC compatibility	yes				
<b>AC coil operating</b>					
Rated AC voltage at 50/60Hz	V	24			
AC operating voltage					
of 50/60Hz coil powered at 50Hz					
pick-up	min	%Us	80		
	max	%Us	110		
drop-out	min	%Us	20		
	max	%Us	55		
of 50/60Hz coil powered at 60Hz					
pick-up	min	%Us	85		
	max	%Us	110		
drop-out	min	%Us	40		
	max	%Us	55		
AC average coil consumption at 20°C					
of 50/60Hz coil powered at 50Hz	in-rush	VA	210		
	holding	VA	15		
of 50/60Hz coil powered at 60Hz	in-rush	VA	195		
	holding	VA	13		
of 60Hz coil powered at 60Hz	in-rush	VA	210		

	holding	VA	15
Dissipation at holding $\leq 20^{\circ}\text{C}$ 50Hz		W	5
Max cycles frequency			
Mechanical operation		cycles/h	3600
Operating times			
Average time for Us control in AC			
	Closing NO		
		min	ms 12
		max	ms 28
	Opening NO		
		min	ms 8
		max	ms 22
in DC			
	Closing NO		
		min	ms 40
		max	ms 85
	Opening NO		
		min	ms 20
		max	ms 55
UL technical data			
Rated operational voltage AC (UL)		V	600
Full-load current (FLA) for three-phase AC motor			
	at 480V	A	40
	at 600V	A	32
Yielded mechanical performance			
for single-phase AC motor			
	110/120V	HP	3
	230V	HP	7.5
for three-phase AC motor			
	200/208V	HP	10
	220/230V	HP	15
	460/480V	HP	30
	575/600V	HP	30
General USE			
Contactor			
	AC current	A	70
Short-circuit protection fuse, 600V			
High fault			
	Short circuit current	kA	100
	Fuse rating	A	150
	Fuse class		J
Standard fault			
	Short circuit current	kA	5
	Fuse rating	A	150
	Fuse class		RK5
Ambient conditions			
Temperature			
Operating temperature			
	min	°C	-50
	max	°C	70
Storage temperature			
	min	°C	-60
	max	°C	80

Max altitude


m 3000

Resistance & Protection

Pollution degree


3

Dimensions

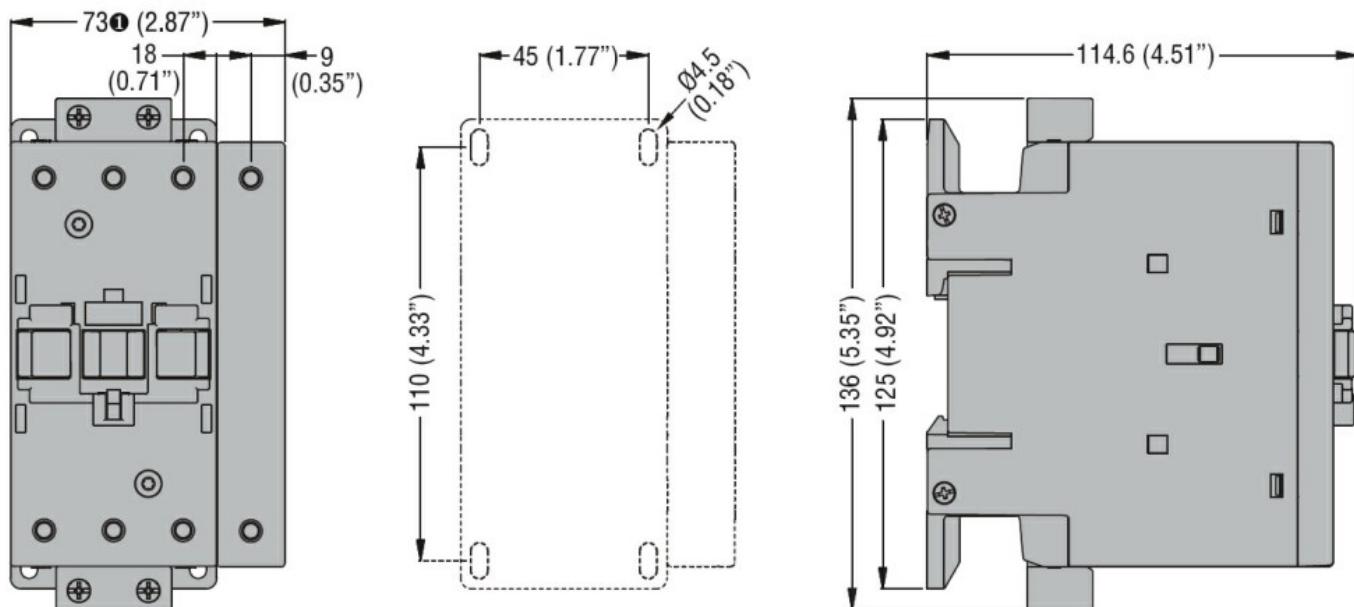

## ① BF80T2 82mm/3.23"

Wiring diagrams

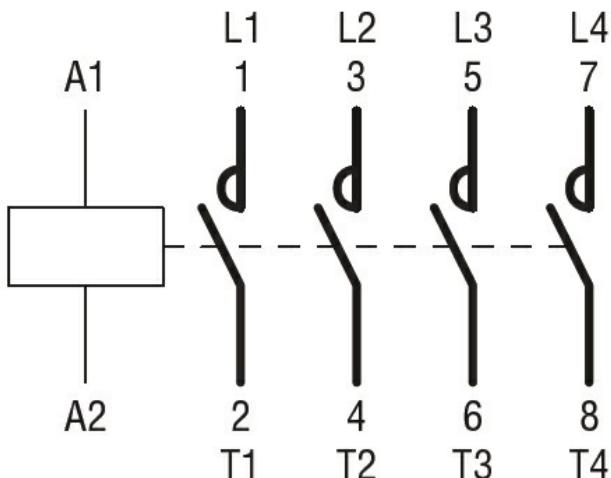

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN/BS 60947-1

IEC/EN/BS 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

ETIM classification

ETIM 8.0

EC000066 -  
Power contactor,  
AC switching