



Product designation	Power contactor		
Product type designation	BF150		
Contact characteristics			
Number of poles	Nr.	3	
Rated insulation voltage U_i IEC/EN	V	1000	
Rated impulse withstand voltage U_{imp}	kV	8	
Operational frequency	min	Hz	25
	max	Hz	400
IEC Conventional free air thermal current I_{th}		A	165
Operational current I_e			
	AC-1 ($\leq 40^\circ C$)	A	165
	AC-1 ($\leq 55^\circ C$)	A	135
	AC-1 ($\leq 70^\circ C$)	A	118
	AC-3 ($\leq 440V \leq 55^\circ C$)	A	150
	AC-4 (400V)	A	70
Rated operational power AC-3 ($T \leq 55^\circ C$)			
	230V	kW	45
	400V	kW	75
	415V	kW	75
	440V	kW	75
	500V	kW	90
	690V	kW	110
	1000V	kW	55
Rated operational current AC-3 ($T \leq 55^\circ C$)			
	230V	A	150
	400V	A	150
	415V	A	150
	440V	A	150
	500V	A	128
	690V	A	113
	1000V	A	51
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 1 poles in series			
	$\leq 24V$	A	165
	48V	A	165
	75V	A	150
	110V	A	10
	220V	A	—
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 2 poles in series			
	$\leq 24V$	A	165
	48V	A	165
	75V	A	165
	110V	A	150
	220V	A	14
IEC max current I_e in DC1 with $L/R \leq 1ms$ with 3 poles in series			

	≤24V	A	165
	48V	A	165
	75V	A	165
	110V	A	160
	220V	A	150
IEC max current Ie in DC1 with L/R ≤ 1ms with 4 poles in series	≤24V	A	165
	48V	A	165
	75V	A	165
	110V	A	165
	220V	A	165
IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 1 poles in series	≤24V	A	165
	48V	A	60
	75V	A	44
	110V	A	6
	220V	A	—
IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 2 poles in series	≤24V	A	165
	48V	A	82
	75V	A	70
	110V	A	80
	220V	A	7
IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 3 poles in series	≤24V	A	165
	48V	A	195
	75V	A	110
	110V	A	120
	220V	A	120
IEC max current Ie in DC3-DC5 with L/R ≤ 15ms with 4 poles in series	≤24V	A	165
	48V	A	130
	75V	A	130
	110V	A	150
	220V	A	150
Short-time allowable current for 10s (IEC/EN60947-1)		A	1200
Protection fuse			
	gG (IEC)	A	250
	aM (IEC)	A	160
Making capacity (RMS value)		A	1500
Breaking capacity at voltage			
	440V	A	1200
	500V	A	1025
	690V	A	905
Resistance per pole (average value)		mΩ	0.45
Power dissipation per pole (average value)			
	I _{th}	W	12
	AC-3	W	10.1
Tightening torque for terminals			
	min	Nm	6
	max	Nm	7
	min	I _{bin}	4.4
	max	I _{bin}	5.2

Tightening torque for coil terminal

min	Nm	0.8
max	Nm	1
min	lbin	0.59
max	lbin	0.74

Conductor section

AWG/Kcmil	max	2/0
Flexible w/o lug conductor section	min	mm ² 1.5
	max	mm ² 70
Flexible c/w lug conductor section	min	mm ² 1.5
	max	mm ² 70

Power terminal protection according to IEC/EN 60529

IP20 front

Mechanical features

Operating position

normal	Vertical plan
allowable	±30°

Fixing

Screw / DIN rail
35mm

Weight

g 2020

Operations

Mechanical life

cycles 15000000

Electrical life

cycles 800000

Safety related data

Performance level B10d according to EN/ISO 13489-1

rated load	cycles	800000
mechanical load	cycles	15000000

EMC compatibility

yes

AC coil operating

Rated AC voltage at 50/60Hz V 400

AC operating voltage


of 50/60Hz coil powered at 50Hz	pick-up	min	%Us	80
		max	%Us	110
drop-out		min	%Us	20
		max	%Us	55

of 50/60Hz coil powered at 60Hz	pick-up	min	%Us	85
		max	%Us	110
drop-out		min	%Us	40
		max	%Us	55


AC average coil consumption at 20°C

of 50/60Hz coil powered at 50Hz	in-rush	VA	300
	holding	VA	20
of 50/60Hz coil powered at 60Hz	in-rush	VA	275
	holding	VA	17

of 60Hz coil powered at 60Hz	in-rush	VA	300
	holding	VA	20
Dissipation at holding $\leq 20^{\circ}\text{C}$ 50Hz		W	6.5
Max cycles frequency			
Mechanical operation		cycles/h	1500
Operating times			
Average time for Us control in AC			
	Closing NO		
		min	ms 45
		max	ms 32
	Opening NO		
		min	ms 9
		max	ms 24
UL technical data			
Rated operational voltage AC (UL)		V	600
Yielded mechanical performance for three-phase AC motor			
	200/208V	HP	50
	220/230V	HP	50
	460/480V	HP	100
	575/600V	HP	125
General USE			
Contactor	AC current	A	165
Short-circuit protection fuse, 600V High fault	Short circuit current Fuse rating Fuse class	kA A J	100 200 J
Standard fault	Short circuit current Fuse rating Fuse class	kA A RK5	10 250 RK5
Ambient conditions			
Temperature Operating temperature	min max	$^{\circ}\text{C}$	-50 70
Storage temperature	min max	$^{\circ}\text{C}$	-60 80
Max altitude		m	3000
Dimensions			

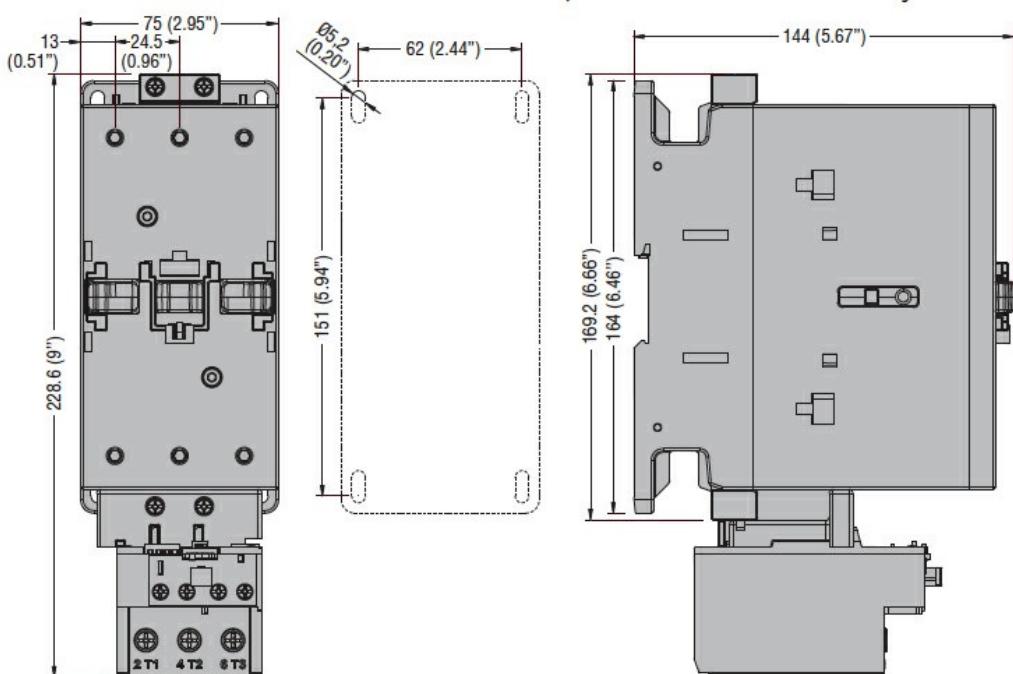

Wiring diagrams

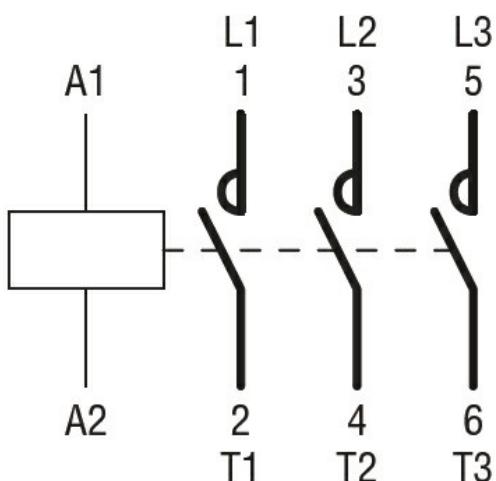

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN/BS 60947-1

IEC/EN/BS 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching