



Auxiliary
contactor
BGF00

Product designation

Product type designation

Contact characteristics

Number of poles	Nr.	4
Rated insulation voltage U_i IEC/EN	V	690
Rated impulse withstand voltage U_{imp}	kV	6
Operational frequency	min	Hz 25
	max	Hz 400
IEC Conventional free air thermal current I_{th}	A	10
Short-time allowable current for 10s (IEC/EN60947-1)	A	0
Protection fuse	gG (IEC)	A 16
Tightening torque for terminals	min	Nm 0.8
	max	Nm 1
	min	Ibin 9
	max	Ibin 9
Tightening torque for coil terminal	min	Nm 0.8
	max	Nm 1
	min	Ibin 9
	max	Ibin 9
Max number of wires simultaneously connectable	Nr.	2

Conductor section

AWG/Kcmil

	max	12
Flexible w/o lug conductor section	min	mm ² 0.75
	max	mm ² 2.5
Flexible c/w lug conductor section	min	mm ² 1.5
	max	mm ² 2.5
Flexible with insulated spade lug conductor section	min	mm ² 1.5
	max	mm ² 2.5

Power terminal protection according to IEC/EN 60529

IP20 when
properly wired

Mechanical features

Operating position

normal
allowable

Vertical plan
±30°

Fixing

Screw / DIN rail
35mm

Weight	g	222		
Auxiliary contact characteristics				
Thermal current I _{th}	A	10		
IEC/EN 60947-5-1 designation		A600 - Q600		
Operating current AC15	230V	A	3	
	400V	A	1.9	
	500V	A	1.4	
Operating current DC12	110V	A	2.9	
Operating current DC13	24V	A	2.9	
	48V	A	1.4	
	60V	A	1.1	
	125V	A	0.3	
	220V	A	0.1	
	600V	A	0.6	
Operations				
Mechanical life	cycles	20000000		
Safety related data				
Performance level B10d according to EN/ISO 13489-1	mechanical load	cycles	20000000	
EMC compatibility			yes	
DC coil operating				
DC rated control voltage	V	125		
DC operating voltage				
pick-up	min	%Us	75	
	max	%Us	115	
drop-out	min	%Us	10	
	max	%Us	25	
Average coil consumption ≤20°C	in-rush	W	3.2	
	holding	W	3.2	
Max cycles frequency				
Mechanical operation	cycles/h	3600		
Operating times				
Average time for U _s control				
in AC				
Closing NO	min	ms	12	
	max	ms	21	
Opening NO	min	ms	9	
	max	ms	18	
Closing NC	min	ms	17	
	max	ms	26	
Opening NC	min	ms	7	
	max	ms	17	
in DC				

Closing NO	min	ms	18
	max	ms	25
Opening NO	min	ms	2
	max	ms	3
Closing NC	min	ms	3
	max	ms	5
Opening NC	min	ms	11
	max	ms	17

UL technical data

Rated operational voltage AC (UL)	V	600
Contact rating of auxiliary contacts according to UL		A600 - Q600


Ambient conditions

Temperature	Operating temperature	min	°C	-50
		max	°C	+70
	Storage temperature	min	°C	-60
		max	°C	+80
Max altitude		m		3000


Resistance & Protection

Pollution degree	3
------------------	---

Dimensions

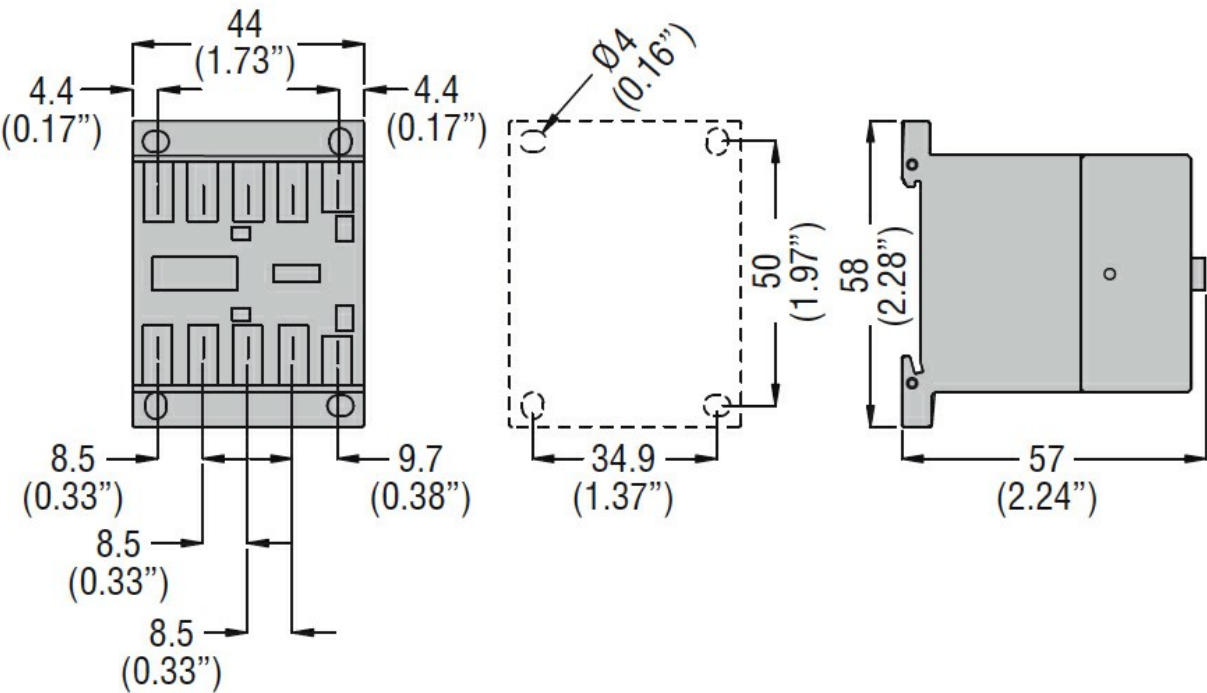

Wiring diagrams

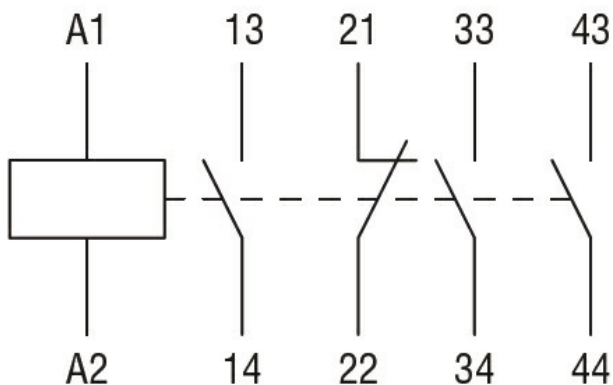

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1
CSA C22.2 n° 60947-5-1
IEC/EN 60947-1
IEC/EN 60947-5-1
UL 60947-1
UL 60947-5-1

Certificates

CCC
cULus
EAC

ETIM classification

ETIM 8.0

EC000196 -
Contactor relay