





Product designation			Auxiliary contact	
Product type designation			G350	
Contact characteristics				
Number of poles			Nr.	4
Rated insulation voltage Ui IEC/EN			V	690
IEC Conventional free air thermal current Ith			A	10
Mechanical features				
Operating position			normal allowable	On vertical plane Any
Fixing			Side mounting	
Weight			g	82
Auxiliary contact characteristics				
Type of contact			2NO+1NC or 1NO+2NC reversible	
Thermal current Ith			A	10
IEC/EN 60947-5-1 designation			A600 - P600	
Operating current AC15			230V	A 3
			400V	A 1.9
			500V	A 1.4
Electrical characteristics				
Conductivity			5V 10 mA	
UL/CSA and IEC/EN 60947-5-1 designation			A600 P600	
Operating current AC15			120V	A 6
			240V	A 3
			480V	A 1.5
UL technical data				
Rated operational voltage AC (UL)			V	600
Ambient conditions				
Temperature				
Operating temperature			min	°C -50
			max	°C +70
Storage temperature			min	°C -60
			max	°C +80
Max altitude			m	3000
Dimensions				

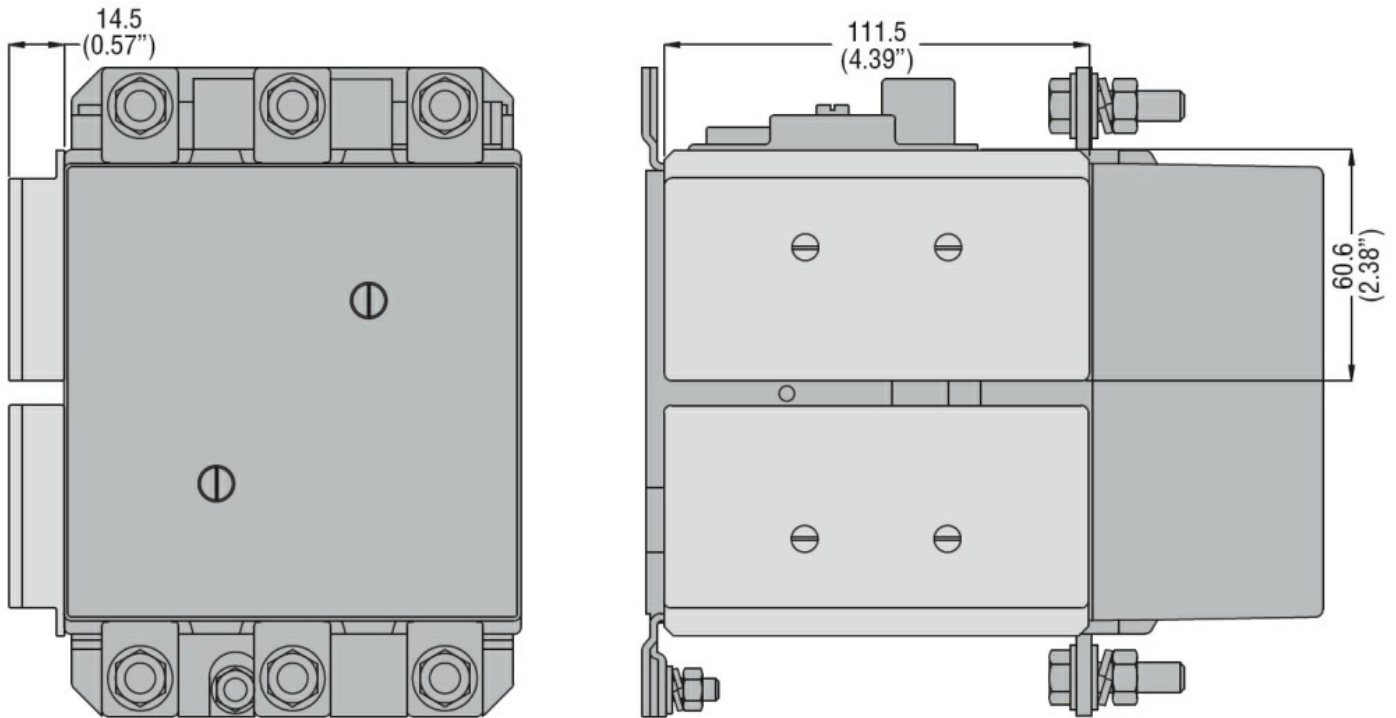

Wiring diagrams

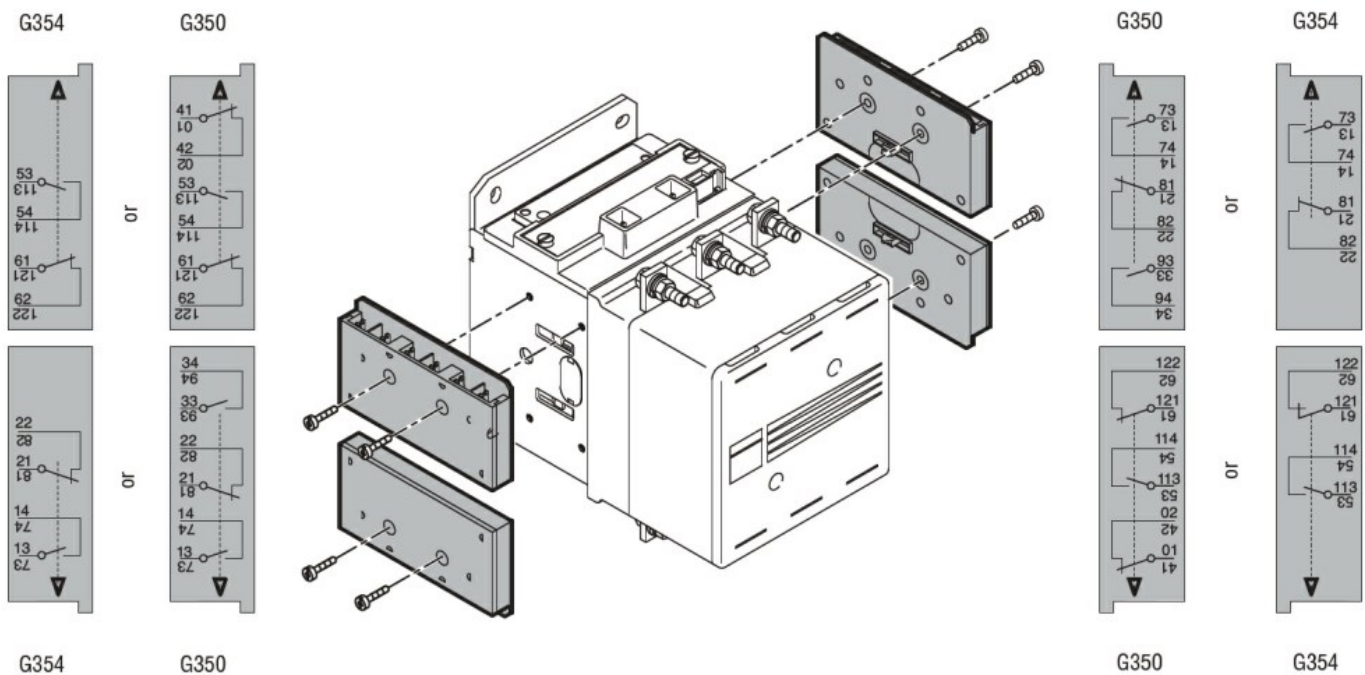

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1
CSA C22.2 n° 60947-5-1
IEC/EN 60947-1
IEC/EN 60947-5-1
UL 60947-1
UL 60947-5-1

Certificates

CCC
cULus
EAC

UR

ETIM classification

ETIM 8.0

EC000041 -
Auxiliary contact
block