

Product designation	Rotary cam switches	
Product type designation	7GN25	
General characteristics		
Switching diagram	05 - ON/OFF switch 1 pole	
N° of elements	1	
Mounting form	O88 - Rear mounting with red/yellow handle padlockable in 0, door coupling and protection covers	
Contact characteristics		
Rated insulation voltage U_i	IEC/EN V 690 UL/CSA V 600	
Rated impulse withstand voltage U_{imp}	kV 6	
Conventional free air thermal current I_{th}	IEC/EN A 25 UL/CSA A 30	
Rated operational voltage	V 480	
Rated operational impulse voltage	kV 4	
Maximum fuse size for short-circuit protection I_n (gG)	10kA A 25 15kA A 25 25kA A 25	
Rated short time current I_{cw}	1s kA 400	
Conductivity	10/5 mA/V	
Operational current I_e IEC/EN		
AC1/AC21A	A 25	
AC15	110V A 16 220/230V A 12 380/400V A 8 660/690V A 2	
Rated operational power in AC		
Three-phase AC-3	220/230V kW 5.5 380/440V kW 7.5 500/690V kW 7.5	
Single-phase AC-3	110V kW 1.5 220/230V kW 3 380/440V kW 5.5	
Three-phase AC23A	220/230V kW 6.5 380/440V kW 11 500/690V kW 11	
Single-phase AC23A	110V kW 1.5	

ROTARY CAM SWITCH 7GN SERIES, ON-OFF SWITCH 1 POLE 25A, FOR REAR MOUNTING
WITH RED/YELLOW HANDLE PADLOCKABLE IN 0, DOOR COUPLING AND PROTECTION
COVERS, FRONT PLATE 65X65MM

	220/230V	kW	3.7
	380/440V	kW	5.5
Rated operational current in DC			
DC21A			
	48V	A	25
	60V	A	25
	110V	A	4
	220V	A	0.7
DC23A (poles in series)			
	24V	A	25 (1)
	48V	A	25 (2)
	60V	A	25 (3)
	110V	A	12 (3)
	220V	A	10 (4)
DC13			
	24V	A	25
	48V	A	20
	60V	A	16
	110V	A	1.5
	220V	A	0.4
Power dissipation		W	1.1
Mechanical features			
Terminals screw			M3.5
Tightening torque for terminals max		Nm	0.8
Conductor size			
AWG - Rigid cable			
	min	AWG	20
	Max	AWG	10
AWG - Flexible cable			
	min	AWG	20
	Max	AWG	12
Conductor size (IEC) - Flexible cable			
	min	mm ²	0.5
	Max	mm ²	4
Conductor size (IEC) - Rigid cable			
	min	mm ²	0.5
	Max	mm ²	4
Mechanical life		cycles	5x10 ⁶
UL technical data			
Motor power for direct-on-line control			
for three-phase motor			
	120V	HP	3
	240V	HP	5
	480V	HP	10
	600V	HP	15
for single-phase motor			
	120V	HP	1.5
	240V	HP	3
Ambient conditions			
Temperature			
Operating temperature			
	min	°C	-25
	max	°C	+55
Storage temperature			


min °C -40
max °C +70

Resistance & Protection

Frontal IP degree IP40


Terminals IP degree IP00

Dimensions

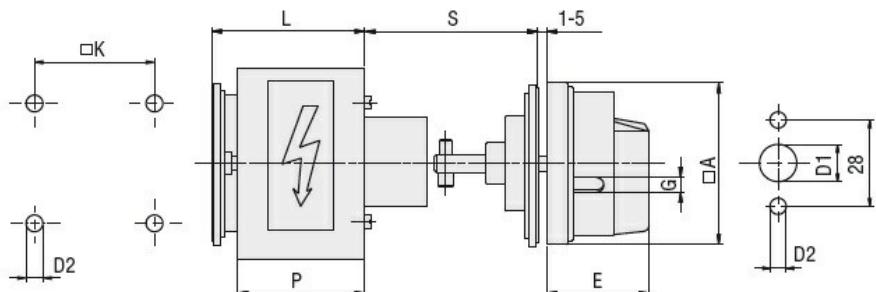

Series	Dimensions								
	A	D1	D2	E	G	K	S	P	L
7GN12	65	12	5	34.2	5	36	45-55	43	51.3
7GN20	65	12	5	34.2	5	36	45-55	43	51.3
7GN25	65	12	5	34.2	5	36	45-55	51	59.6
7GN32	65	14	5	38	6	48	45-55	55	68.7
7GN40	65	14	5	38	6	48	45-55	55	68.7

Wiring diagrams

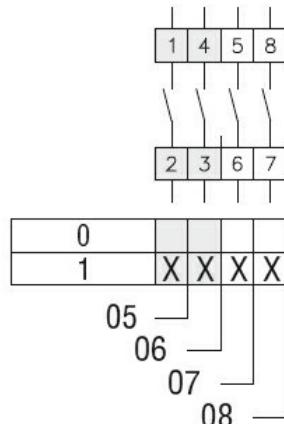

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

UL60947-4-1

Certificates

cCSAus

EAC

UL

ETIM classification

ETIM 8.0

EC001029 -
Selector switch,
complete

ROTARY CAM SWITCH 7GN SERIES, ON-OFF SWITCH 1 POLE 25A, FOR REAR MOUNTING
WITH RED/YELLOW HANDLE PADLOCKABLE IN 0, DOOR COUPLING AND PROTECTION
COVERS, FRONT PLATE 65X65MM