



Product designation			Rotary cam switches	
Product type designation			GF10	
General characteristics				
Switching diagram			85 - Multi-step 1-2-3-4-6 1 pole	
N° of elements			3	
Mounting form			U47 - Snap on fron mounting with black handle for hole diam. 22mm finxing	
Contact characteristics				
Rated insulation voltage Ui			IEC/EN UL/CSA	V V 480 240
Rated impulse withstand voltage Uimp			kV	4
Conventional free air thermal current Ith			IEC/EN UL/CSA	A A 10 10
Rated operational voltage			V	480
Rated operational impulse voltage			kV	4
Maximum fuse size for short-circuit protection In (gG)			10kA	A 16
Rated short time current Icw			1s	kA 250
Conductivity			10/5 mA/V	
Operational current Ie IEC/EN				
AC1/AC21A			A	10
AC15			110V 220/230V 380/400V	A A A 5 3 2
Rated operational power in AC				
Three-phase AC-3			220/230V 380/440V	kW kW 1.5 2.2
Single-phase AC-3			110V 220/230V 380/440V	kW kW kW 0.3 0.55 0.75
Three-phase AC23A			220/230V 380/440V	kW kW 1.8 3
Single-phase AC23A			110V 220/230V 380/440V	kW kW kW 0.7 0.75 1.1
Rated operational current in DC				
DC21A			48V 60V	A A 10 7

		110V	A	2
		220V	A	0.7
		440V	A	0.2
DC13				
		24V	A	3
		48V	A	3
		60V	A	2
		110V	A	1
		220V	A	0.3
		440V	A	0.1
Power dissipation			W	0.4
Mechanical features				
Terminals screw				2.5M
Tightening torque for terminals max			Nm	0.4
Conductor size				
AWG - Rigid cable				
	min	AWG		20
	Max	AWG		14
AWG - Flexible cable				
	min	AWG		20
	Max	AWG		14
Conductor size (IEC) - Flexible cable				
	min	mm ²		0.5
	Max	mm ²		1.5
Conductor size (IEC) - Rigid cable				
	min	mm ²		0.5
	Max	mm ²		1.5
Mechanical life			cycles	1x10 ⁶
UL technical data				
Motor power for direct-on-line control				
for three-phase motor				
		240V	HP	2
for single-phase motor				
		240V	HP	0.75
Ambient conditions				
Temperature				
Operating temperature				
	min	°C		-25
	max	°C		+55
Storage temperature				
	min	°C		-40
	max	°C		+70
Resistance & Protection				
Frontal IP degree				IP40
Terminals IP degree				IP20
Dimensions				

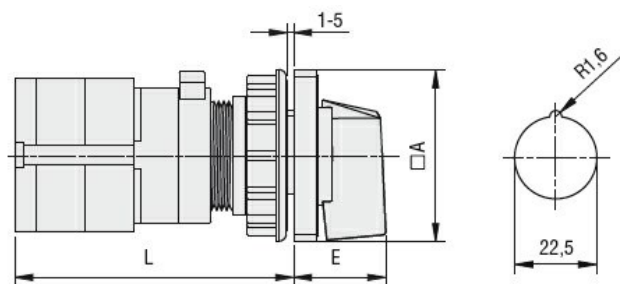

Series	Dimensions		L			
	□A	E	1	2	3...8	
GF10	30	18.5	60	72	84	144
GF20	48	26.5	56	69.5	83	150.5

Wiring diagrams



1	X				
2		X			
3				X	
4		X			
5			X		
6					X

85

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

UL60947-4-1

Certificates

cULus

EAC

ETIM classification

ETIM 8.0

EC001029 -
Selector switch,
complete