

ROTARY CAM SWITCH GX SERIES, DAHLANDER MOTOR 2-SPEED REVERSING SWITCH, 16A, FOR REAR MOUNTING WITH RED/YELLOW HANDLE PADLOCKABLE IN 0, DOOR COUPLING AND PROTECTION COVERS, FRONT PLATE 48X48MM

Product designation	Rotary cam switches
Product type designation	GX16
General characteristics	
Switching diagram	20 - Dahlander motor 2-speed reversing switch
N° of elements	6
Mounting form	O88 - Rear mounting with red/yellow handle padlockable in 0, door coupling and protection covers
Contact characteristics	
Rated insulation voltage Ui	IEC/EN V 690 UL/CSA V 600
Rated impulse withstand voltage Uimp	kV 6
Conventional free air thermal current Ith	IEC/EN A 16 UL/CSA A 12
Rated operational voltage	V 440
Rated operational impulse voltage	kV 4
Maximum fuse size for short-circuit protection In (gG)	10kA A 16 15kA A 16 25kA A 16
Rated short time current Icw	1s kA 250
Conductivity	10/5 mA/V
Operational current Ie IEC/EN	
AC1/AC21A	A 16
AC15	110V A 10 220/230V A 8 380/400V A 4 660/690V A 1.5
Rated operational power in AC	
Three-phase AC-3	220/230V kW 3.5 380/440V kW 4.5 500/690V kW 5.5
Single-phase AC-3	110V kW 0.55 220/230V kW 1.5 380/440V kW 2.2
Three-phase AC23A	220/230V kW 3.7 380/440V kW 6.5 500/690V kW 7.5
Single-phase AC23A	

**ROTARY CAM SWITCH GX SERIES, DAHLANDER MOTOR 2-SPEED REVERSING SWITCH,
16A, FOR REAR MOUNTING WITH RED/YELLOW HANDLE PADLOCKABLE IN 0, DOOR
COUPLING AND PROTECTION COVERS, FRONT PLATE 48X48MM**

	110V	kW	0.75
	220/230V	kW	1.8
	380/440V	kW	3
<hr/>			
Rated operational current in DC			
DC21A			
	48V	A	16
	60V	A	16
	110V	A	4
	220V	A	0.6
	440V	A	0.25
<hr/>			
DC23A (poles in series)			
	24V	A	16 (1)
	48V	A	16 (2)
	60V	A	16 (3)
	110V	A	10 (3)
	220V	A	7 (4)
<hr/>			
DC13			
	24V	A	16
	48V	A	14
	60V	A	10
	110V	A	1
	220V	A	0.4
	440V	A	0.15
<hr/>			
Power dissipation		W	0.6
<hr/>			
Mechanical features			
Terminals screw			3M
Tightening torque for terminals max		Nm	0.5
<hr/>			
Conductor size			
AWG - Rigid cable			
	min	AWG	20
	Max	AWG	12
<hr/>			
AWG - Flexible cable			
	min	AWG	20
	Max	AWG	12
<hr/>			
Conductor size (IEC) - Flexible cable			
	min	mm ²	0.5
	Max	mm ²	2.5
<hr/>			
Conductor size (IEC) - Rigid cable			
	min	mm ²	0.5
	Max	mm ²	2.5
<hr/>			
Mechanical life		cycles	1X10 ⁶
<hr/>			
UL technical data			
Motor power for direct-on-line control			
for three-phase motor			
	120V	HP	1.5
	240V	HP	3
	480V	HP	5
	600V	HP	5
<hr/>			
for single-phase motor			
	120V	HP	0.75
	240V	HP	1
<hr/>			
Ambient conditions			
Temperature			
Operating temperature			

min	°C	-25
max	°C	+55

Storage temperature

min	°C	-40
max	°C	+70

Resistance & Protection

Frontal IP degree


IP65

Terminals IP degree

IP20

Dimensions

Wiring diagrams

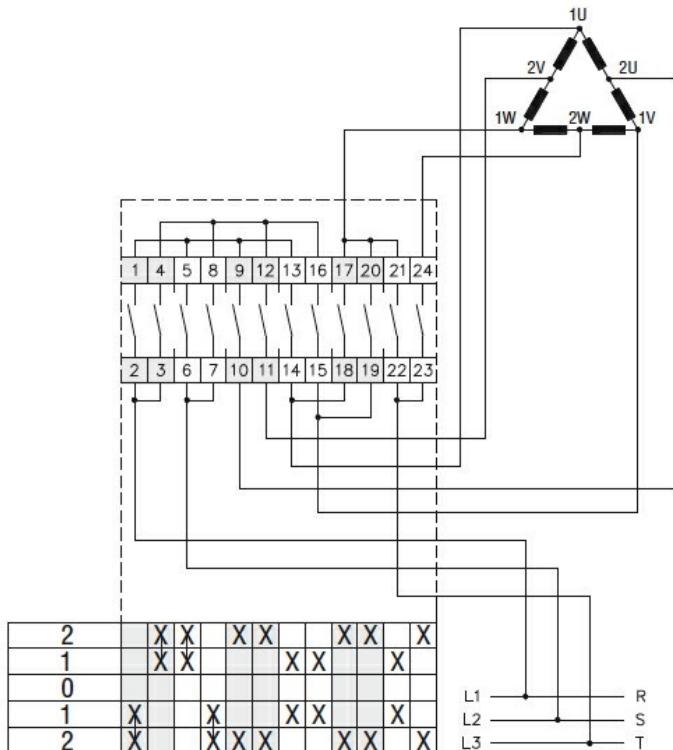

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

IEC/EN/BS 61058-1

UL60947-4-1

Certificates

cULus

EAC

ETIM classification

ETIM 8.0

EC001029 -
Selector switch,
complete