

Product designation	Rotary cam switches	
Product type designation	7GN32	
<b>General characteristics</b>		
Switching diagram	84 - Multi-step 1-2-3-4-5 1 pole	
N° of elements	3	
Mounting form	U - Front mounting with black handle	
<b>Contact characteristics</b>		
Rated insulation voltage Ui	IEC/EN V 690 UL/CSA V 600	
Rated impulse withstand voltage Uimp	kV 6	
Conventional free air thermal current Ith	IEC/EN A 32 UL/CSA A 40	
Rated operational voltage	V 480	
Rated operational impulse voltage	kV 4	
Maximum fuse size for short-circuit protection In (gG)	10kA A 32 15kA A 32 25kA A 32 50kA A 32	
Rated short time current Icw	1s kA 800	
Conductivity	10/5 mA/V	
Operational current Ie IEC/EN		
AC1/AC21A	A 32	
AC15	110V A 25 220/230V A 20 380/400V A 10 660/690V A 2	
Rated operational power in AC		
Three-phase AC-3	220/230V kW 7.5 380/440V kW 11 500/690V kW 11	
Single-phase AC-3	110V kW 2.2 220/230V kW 4 380/440V kW 6.5	
Three-phase AC23A	220/230V kW 8 380/440V kW 15 500/690V kW 18.5	
Single-phase AC23A	110V kW 2.2 220/230V kW 4 380/440V kW 7.5	

Rated operational current in DC

DC21A

48V	A	32
60V	A	32
110V	A	6
220V	A	0.9

DC23A (poles in series)

24V	A	32 (1)
48V	A	32 (2)
60V	A	32 (3)
110V	A	15 (3)
220V	A	12 (4)

DC13

24V	A	32
48V	A	25
60V	A	16
110V	A	3
220V	A	0.5

Power dissipation

W 1.5

Mechanical features

Terminals screw

M4

Tightening torque for terminals max

Nm 1.2

Conductor size

AWG - Rigid cable

min	AWG	16
Max	AWG	8

AWG - Flexible cable

min	AWG	16
Max	AWG	10

Conductor size (IEC) - Flexible cable

min	mm <sup>2</sup>	1.5
Max	mm <sup>2</sup>	4

Conductor size (IEC) - Rigid cable

min	mm <sup>2</sup>	1.5
Max	mm <sup>2</sup>	6

Mechanical life

cycles 5x10<sup>6</sup>

UL technical data

Motor power for direct-on-line control

for three-phase motor

120V	HP	5
240V	HP	10
480V	HP	15
600V	HP	15

for single-phase motor

120V	HP	2
240V	HP	5

Ambient conditions

Temperature

Operating temperature

min	°C	-25
max	°C	+55

Storage temperature

min	°C	-40
max	°C	+70

Resistance & Protection



Frontal IP degree

IP40

Terminals IP degree

IP00



Dimensions

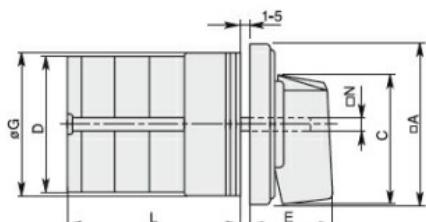

Standard drillings for 7GN125.  
Drillings on request for 4 screws fixing (4V version).

Series	Dimensions									L Number of elements											
	A	C	D	D1	D2	E	G	K	N	1	2	3	4	5	6	7	8	9	10	11	12
7GN12	48	39.5	39	12	5	26.5	38	36	6	36.1	45.8	55.5	65.2	74.9	84.6	94.3	104	113.7	123.4	133.1	142.8
7GN20	48	39.5	39	12	5	26.5	38	36	6	36.1	45.8	55.5	65.2	74.9	84.6	94.3	104	113.7	123.4	133.1	142.8
7GN25	48	39.5	43	12	5	26.5	38	36	6	40.5	54.1	67.7	81.3	94.9	108.5	122.1	135.7	147.3	162.9	176.5	190.1
7GN32	65	53	58	14	5	34.5	58.5	48	7	46.5	61.6	76.7	91.8	106.9	122	137.1	152.2	167.3	182.4	197.5	212.6
7GN40	65	53	58	14	5	34.5	58.5	48	7	46.5	61.6	76.7	91.8	106.9	122	137.1	152.2	167.3	182.4	197.5	212.6
7GN63	65	53	62	14	5	34.5	58.5	48	7	50.3	68.4	86.5	104.6	122.7	140.8	158.9	177	195.1	213.2	231.3	249.4
7GN125	90	70.5	86	16	6	41.5	84	68	9	67.3	96.4	125.5	154.6	183.7	220.3	249.4	278.5	307.6	336.7	365.8	394.9

Wiring diagrams



Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

UL60947-4-1

Certificates

cCSAus

EAC

UL

ETIM classification

ETIM 8.0

EC001029 -  
Selector switch,  
complete