

Product designation	Enclosed rotary cam switch		
Product type designation	GN200		
<b>General characteristics</b>			
Switching diagram	94 - Multi-step 1-2-3-4 3 poles		
N° of elements	6		
Mounting form	L - Metal enclosure with black handle		
<b>Contact characteristics</b>			
Rated insulation voltage Ui	IEC/EN UL/CSA	V V	690 600
Rated impulse withstand voltage Uimp		kV	8
Conventional free air thermal current Ith	IEC/EN UL/CSA	A A	200 200
Rated operational voltage		V	690
Rated operational impulse voltage		kV	6
Maximum fuse size for short-circuit protection In (gG)	10kA 15kA	A A	200 200
Rated short time current Icw	1s	kA	3300
Operational current Ie IEC/EN AC1/AC21A		A	200
Rated operational power in AC Three-phase AC-3	220/230V 380/440V	kW kW	27.5 47
Rated operational current in DC DC21A	48V 60V 110V 220V 440V	A A A A A	200 200 35 2.5 0.9
Power dissipation		W	26
<b>Mechanical features</b>			
Terminals screw		M10	
Tightening torque for terminals max		Nm	10
Conductor size			
AWG - Rigid cable	Max	AWG	1X3
AWG - Flexible cable	Max	AWG	0
Conductor size (IEC) - Flexible cable	Max	mm <sup>2</sup>	1X95
Conductor size (IEC) - Rigid cable	Max	mm <sup>2</sup>	1X95
Mechanical life		cycles	2X10 <sup>5</sup>

**UL technical data**

Motor power for direct-on-line control  
for three-phase motor

120V	HP	30
240V	HP	50
480V	HP	100
600V	HP	75

for single-phase motor

120V	HP	15
240V	HP	30

**Ambient conditions**

Temperature

Operating temperature

min	°C	-25
max	°C	+55

Storage temperature

min	°C	-40
max	°C	+70

**Resistance & Protection**


Frontal IP degree

IP54

Terminals IP degree


IP00

**Dimensions**

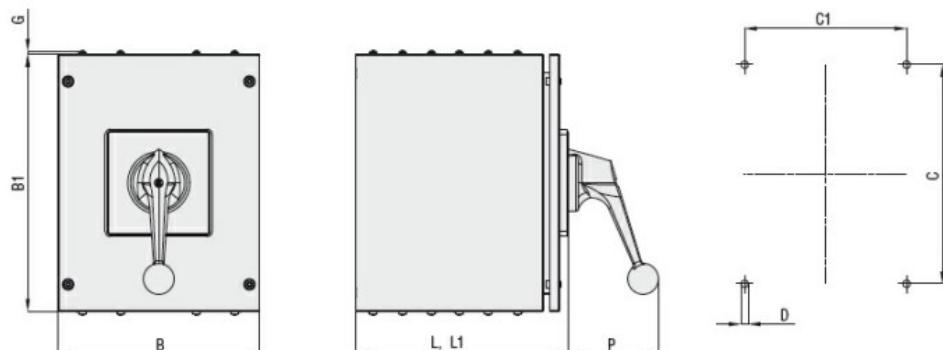

Series	Enclosure size	Number of elements		Dimensions								Protection degree	
		L	L1	L	L1	B	B1	C	C1	D	G	P	
GN200	250x316	1 - 3	4 - 6	162	252	250	316	270	200	9	4.5	98	IP54
GN315		1 - 3	4 - 6	162	252	250	316	270	200	9	4.5	98	IP54

**Wiring diagrams**

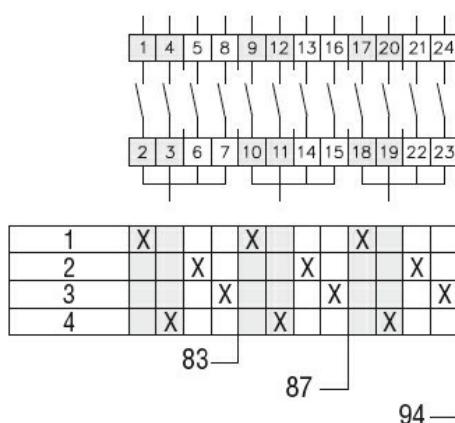

**Certifications and compliance**

Compliance

IEC/EN/BS 60947-1

---

IEC/EN/BS 60947-3

---

IEC/EN/BS 60947-5-1

---

ETIM classification

ETIM 8.0

EC001029 -  
Selector switch,  
complete