


Product designation	Enclosed rotary cam switch		
Product type designation	GN315		
General characteristics			
Switching diagram	08 - ON/OFF switch 4 poles		
N° of elements	2		
Mounting form	L - Metal enclosure with black handle		
Contact characteristics			
Rated insulation voltage Ui	IEC/EN UL/CSA	V V	690 600
Rated impulse withstand voltage Uimp		kV	8
Conventional free air thermal current Ith	IEC/EN UL/CSA	A A	315 255
Rated operational voltage		V	690
Rated operational impulse voltage		kV	6
Maximum fuse size for short-circuit protection In (gG)	10kA 15kA	A A	315 315
Rated short time current Icw	1s	kA	5200
Operational current Ie IEC/EN AC1/AC21A		A	315
Rated operational power in AC Three-phase AC-3	220/230V 380/440V 500/690V	kW	37 55 69
Single-phase AC-3	110V 220/230V 380/440V	kW	11 22 30
Rated operational current in DC DC21A	48V 60V 110V 220V 440V	A	200 200 35 2.5 0.9
Power dissipation		W	64.5
Mechanical features			
Terminals screw		M10	
Tightening torque for terminals max		Nm	10
Conductor size AWG - Rigid cable	Max	AWG	1XMC350
AWG - Flexible cable	Max	AWG	1XMC350

Conductor size (IEC) - Flexible cable	Max	mm ²	1X185
Conductor size (IEC) - Rigid cable	Max	mm ²	1X185
Mechanical life	cycles		2X10 ⁵
UL technical data			
Motor power for direct-on-line control for three-phase motor			
	120V	HP	30
	240V	HP	50
	480V	HP	100
	600V	HP	75
for single-phase motor			
	120V	HP	15
	240V	HP	30


Ambient conditions			
Temperature			
Operating temperature	min	°C	-25
	max	°C	+55
Storage temperature	min	°C	-40
	max	°C	+70

Resistance & Protection		
Frontal IP degree		IP54
Terminals IP degree		IP00
Dimensions		

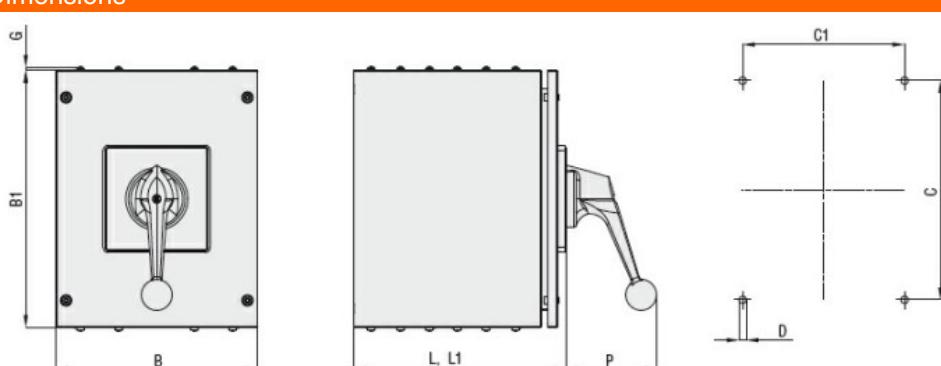

Series	Enclosure size	Dimensions										Protection degree	
		L	L1	L	L1	B	B1	C	C1	D	G		
GN200	250x316	1 - 3	4 - 6	162	252	250	316	270	200	9	4.5	98	IP54
GN315		1 - 3	4 - 6	162	252	250	316	270	200	9	4.5	98	IP54

Wiring diagrams

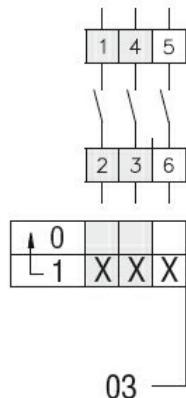

Certifications and compliance

Compliance

[IEC/EN/BS 60947-1](#)

[IEC/EN/BS 60947-3](#)

[IEC/EN/BS 60947-5-1](#)

ETIM classification

ETIM 8.0

EC001029 -
Selector switch,
complete