

Product designation	Rotary cam switches	
Product type designation	7GN63	
General characteristics		
Switching diagram	20 - Dahlander motor 2-speed reversing switch	
N° of elements	6	
Mounting form	U - Front mounting with black handle	
Contact characteristics		
Rated insulation voltage Ui	IEC/EN V 690 UL/CSA V 600	
Rated impulse withstand voltage Uimp	kV 6	
Conventional free air thermal current Ith	IEC/EN A 63 UL/CSA A 60	
Rated operational voltage	V 480	
Rated operational impulse voltage	kV 4	
Maximum fuse size for short-circuit protection In (gG)	10kA A 63 15kA A 63 25kA A 63 50kA A 63 63kA A 63	
Rated short time current Icw	1s kA 1600	
Conductivity	10/5 mA/V	
Operational current Ie IEC/EN		
AC1/AC21A	A 63	
AC15	110V A 32 220/230V A 25 380/400V A 15 660/690V A 4	
Rated operational power in AC		
Three-phase AC-3	220/230V kW 11 380/440V kW 18.5 500/690V kW 18.5	
Single-phase AC-3	110V kW 3.7 220/230V kW 6.5 380/440V kW 11.5	
Three-phase AC23A	220/230V kW 12.5 380/440V kW 30 500/690V kW 30	
Single-phase AC23A	110V kW 3.7	

	220/230V	kW	7.5
	380/440V	kW	12.5
Rated operational current in DC			
DC21A			
	48V	A	63
	60V	A	50
	110V	A	8
	220V	A	1
DC23A (poles in series)			
	24V	A	50 (1)
	48V	A	50 (2)
	60V	A	50 (3)
	110V	A	25 (3)
	220V	A	15 (4)
DC13			
	24V	A	63
	48V	A	40
	60V	A	28
	110V	A	3.3
Power dissipation		W	3.4
Mechanical features			
Terminals screw		M5	
Tightening torque for terminals max		Nm	2
Conductor size			
AWG - Rigid cable			
	min	AWG	14
	Max	AWG	6
AWG - Flexible cable			
	min	AWG	14
	Max	AWG	8
Conductor size (IEC) - Flexible cable			
	min	mm ²	2.5
	Max	mm ²	10
Conductor size (IEC) - Rigid cable			
	min	mm ²	2.5
	Max	mm ²	16
Mechanical life		cycles	5x10 ⁶
UL technical data			
Motor power for direct-on-line control			
for three-phase motor			
	120V	HP	7.5
	240V	HP	15
	480V	HP	25
	600V	HP	25
for single-phase motor			
	120V	HP	3
	240V	HP	10
Ambient conditions			
Temperature			
Operating temperature			
	min	°C	-25
	max	°C	+55
Storage temperature			
	min	°C	-40

max °C +70

Resistance & Protection



Frontal IP degree

IP40

Terminals IP degree

IP00


Dimensions

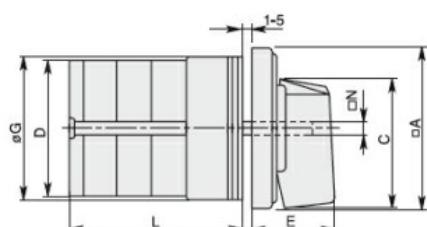

Standard drillings for 7GN125.
Drillings on request for 4 screws fixing
(4V version).

Series	Dimensions										L Number of elements										
	□A	C	0D	0D1	0D2	E	0G	□K	□N	1	2	3	4	5	6	7	8	9	10	11	12
7GN12	48	39.5	39	12	5	26.5	38	36	6	36.1	45.8	55.5	65.2	74.9	84.6	94.3	104	113.7	123.4	133.1	142.8
7GN20	48	39.5	39	12	5	26.5	38	36	6	36.1	45.8	55.5	65.2	74.9	84.6	94.3	104	113.7	123.4	133.1	142.8
7GN25	48	39.5	43	12	5	26.5	38	36	6	40.5	54.1	67.7	81.3	94.9	108.5	122.1	135.7	147.3	162.9	176.5	190.1
7GN32	65	53	58	14	5	34.5	58.5	48	7	46.5	61.6	76.7	91.8	106.9	122	137.1	152.2	167.3	182.4	197.5	212.6
7GN40	65	53	58	14	5	34.5	58.5	48	7	46.5	61.6	76.7	91.8	106.9	122	137.1	152.2	167.3	182.4	197.5	212.6
7GN63	65	53	62	14	5	34.5	58.5	48	7	50.3	68.4	86.5	104.6	122.7	140.8	158.9	177	195.1	213.2	231.3	249.4
7GN125	90	70.5	86	16	6	41.5	84	68	9	67.3	96.4	125.5	154.6	183.7	220.3	249.4	278.5	307.6	336.7	365.8	394.9

Wiring diagrams

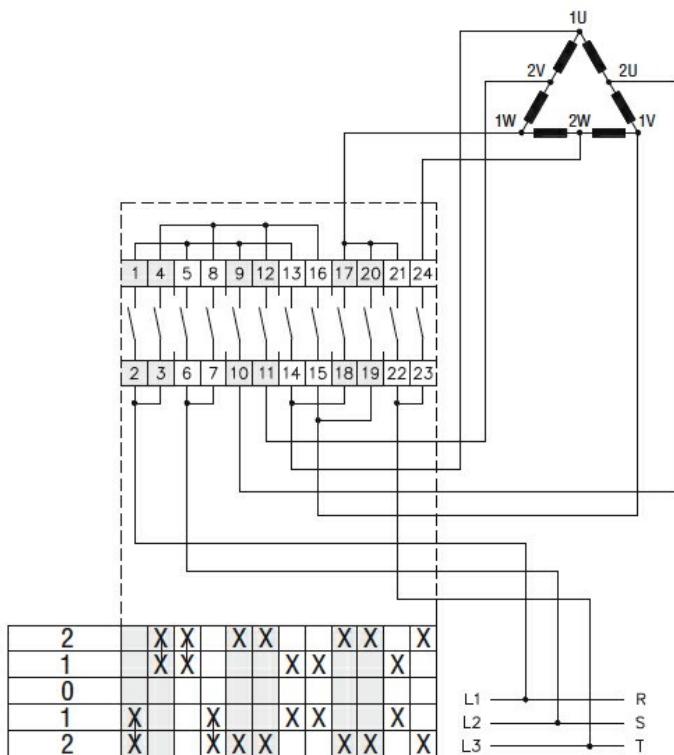

Certifications and compliance

Compliance

CSA C22.2 n° 14

IEC/EN/BS 60947-1

IEC/EN/BS 60947-3

IEC/EN/BS 60947-5-1

UL60947-4-1

Certificates

cCSAus

EAC

UL

ETIM classification

ETIM 8.0

EC001029 -
Selector switch,
complete