

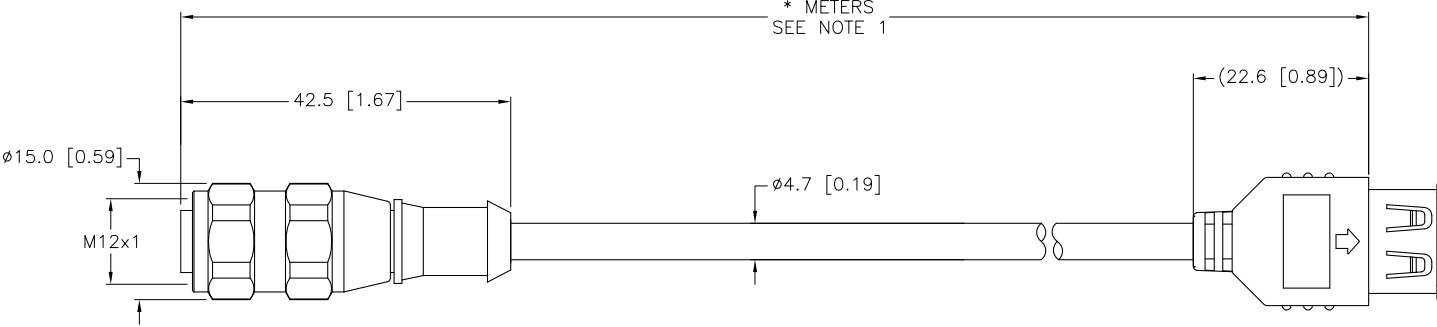





FEMALE END VIEW	USB END VIEW	SPECIFICATIONS	
 1 = RED 2 = WHITE 3 = GREEN 4 = BLACK	 1 = RED (USBVCC0) 2 = WHITE (USBD0-) DATA 3 = GREEN (USBD0+) 4 = BLACK (USBGND)	CONTACT CARRIER MATERIAL/COLOR (EURO)	NYLON OR TPU/YELLOW
		MOLDED HEAD MATERIAL/COLOR (EURO)	TPU/YELLOW
		CONTACT MATERIAL/PLATING (EURO)	BRASS/GOLD
		HOUSING MATERIAL/FINISH (EURO)	STAINLESS STEEL/PASSIVATED
		RATED CURRENT [A]	1.0 A
		RATED VOLTAGE [V]	30 V
		OUTER CABLE JACKET MATERIAL/COLOR	PVC/BEIGE
		CONDUCTOR INSULATION MATERIAL	PE (DATA), SRPVC (POWER)
		NUMBER OF CONDUCTORS [AWG]	2x28 AWG (DATA), 2x24 AWG (POWER)
		SHIELDING	TINNED-COPPER BRAIDED
		TEMPERATURE RANGE	-40°C to +75°C (-40°F to +167°F)
		PROTECTION CLASS (EURO)	MEETS NEMA 1,3,4,6P AND IEC IP68

 * METERS SEE NOTE 1 42.5 [1.67] Ø15.0 [0.59] M12x1 Ø4.7 [0.19] (22.6 [0.89]) USB CONNECTOR																																						
<table><tr><th>CABLE LENGTH</th><th>TOLERANCE</th></tr><tr><td>ALL LENGTHS</td><td>+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER</td></tr><tr><th>STRIP LENGTH</th><th>TOLERANCE</th></tr><tr><td>0-7mm</td><td>±0.5mm</td></tr><tr><td>8-29mm</td><td>±1.0mm</td></tr><tr><td>30-49mm</td><td>±2.0mm</td></tr><tr><td>50-69mm</td><td>±3.0mm</td></tr><tr><td>70-100mm</td><td>±4.0mm</td></tr><tr><td>OVER 100mm</td><td>±5.0mm</td></tr></table>		CABLE LENGTH	TOLERANCE	ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER	STRIP LENGTH	TOLERANCE	0-7mm	±0.5mm	8-29mm	±1.0mm	30-49mm	±2.0mm	50-69mm	±3.0mm	70-100mm	±4.0mm	OVER 100mm	±5.0mm																			
CABLE LENGTH	TOLERANCE																																					
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER																																					
STRIP LENGTH	TOLERANCE																																					
0-7mm	±0.5mm																																					
8-29mm	±1.0mm																																					
30-49mm	±2.0mm																																					
50-69mm	±3.0mm																																					
70-100mm	±4.0mm																																					
OVER 100mm	±5.0mm																																					
NOTES: 1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS. 2. "/C1282" DESIGNATES USB TYPE-A FEMALE CONNECTOR WITH CUSTOM WIRING.																																						
<table><tr><td>RELATED DOCUMENTS</td><td>3RD ANGLE PROJECTION</td><td colspan="2">THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</td><td colspan="2">3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</td></tr><tr><td>1. 2. 3. 4.</td><td></td><td>DRFT RDS</td><td>DATE 09/05/07</td><td colspan="2">DESCRIPTION RKV 4.4T-*--USB/AF/C1282</td></tr><tr><td>MATERIAL</td><td rowspan="2">ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</td><td>DSGN</td><td>SCALE 1=1.0</td><td colspan="2">IDENTIFICATION NO.</td></tr><tr><td>FINISH</td><td colspan="2">UNIT OF MEASUREMENT MILLIMETER [INCH]</td><td>REV C</td></tr><tr><td colspan="2"></td><td colspan="2">DO NOT SCALE THIS DRAWING</td><td colspan="2">FILE: 777020324</td></tr><tr><td colspan="2"></td><td colspan="2"></td><td colspan="2">SHEET 1 OF 1</td></tr></table>		RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com		1. 2. 3. 4.		DRFT RDS	DATE 09/05/07	DESCRIPTION RKV 4.4T-*--USB/AF/C1282		MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DSGN	SCALE 1=1.0	IDENTIFICATION NO.		FINISH	UNIT OF MEASUREMENT MILLIMETER [INCH]		REV C			DO NOT SCALE THIS DRAWING		FILE: 777020324						SHEET 1 OF 1				
RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com																																		
1. 2. 3. 4.		DRFT RDS	DATE 09/05/07	DESCRIPTION RKV 4.4T-*--USB/AF/C1282																																		
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DSGN	SCALE 1=1.0	IDENTIFICATION NO.																																		
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]		REV C																																		
		DO NOT SCALE THIS DRAWING		FILE: 777020324																																		
				SHEET 1 OF 1																																		
<table><tr><td>C</td><td>DRAWING PROCESSED AS PART OF ECO 33971</td><td>CBM</td><td>04/06/11</td><td>33971</td></tr><tr><td>REV</td><td>DESCRIPTION</td><td>BY</td><td>DATE</td><td>ECO NO.</td></tr></table>		C	DRAWING PROCESSED AS PART OF ECO 33971	CBM	04/06/11	33971	REV	DESCRIPTION	BY	DATE	ECO NO.																											
C	DRAWING PROCESSED AS PART OF ECO 33971	CBM	04/06/11	33971																																		
REV	DESCRIPTION	BY	DATE	ECO NO.																																		