


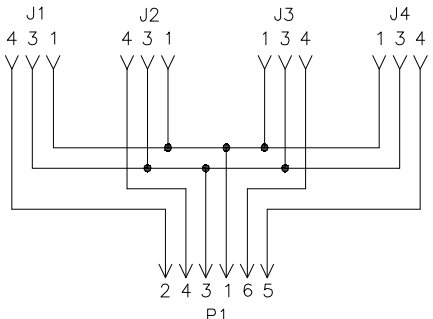


MALE END VIEW	FEMALE END VIEW	WIRING DIAGRAM	SPECIFICATIONS	
			CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/BLACK
			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
			RATED CURRENT [A]	2.0 A
			RATED VOLTAGE [V]	60 VAC/75 VDC
			OUTER JACKET MATERIAL/COLOR	PVC/GRAY(P1), PVC/YELLOW(J1-J4)
			CONDUCTOR INSULATION MATERIAL	PVC
			NUMBER OF CONDUCTOR [AWG]	24 AWG
			TEMPERATURE RATING	-40°C to +105°C (-40°F to +221°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

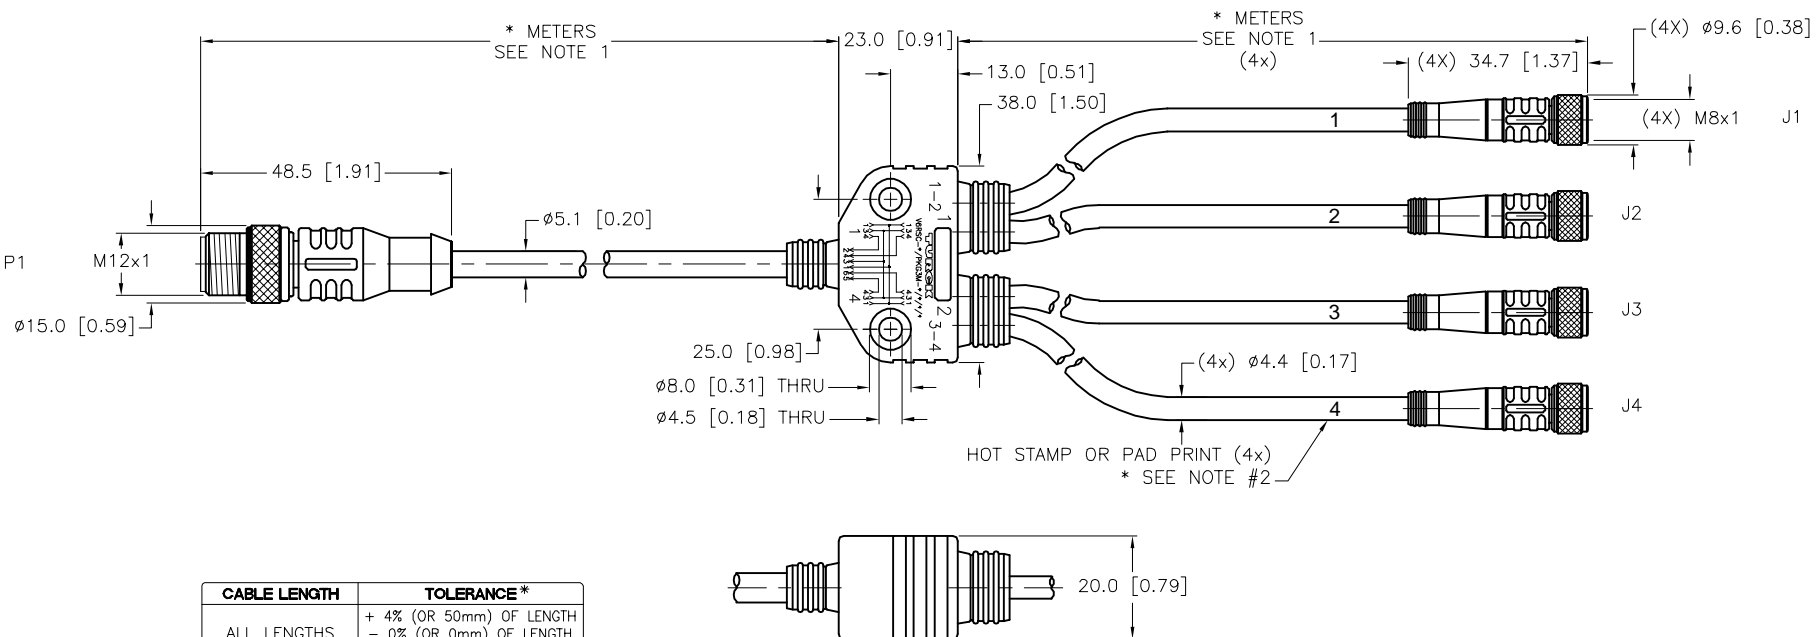


CABLE LENGTH	TOLERANCE*
ALL LENGTHS	+ 4% (OR 50mm) OF LENGTH - 0% (OR 0mm) OF LENGTH WHICHEVER IS GREATER
STRIP LENGTH	TOLERANCE*
0-7mm	±0.5mm
8-29mm	±1.0mm
30-49mm	±2.0mm
50-69mm	±3.0mm
70-100mm	±4.0mm
OVER 100mm	±5.0mm

* UNLESS OTHERWISE SPECIFIED

NOTES:

1. "*" INDICATES CABLE LENGTH IN METERS. CONTACT TURCK TO ORDER SPECIFIC LENGTHS.
2. USE HOT STAMP OR PAD PRINT BASED ON THE LENGTH OF THE BRANCHES.
 - IF BRANCHES ARE 0.22 METERS OR LONGER, USE HOT STAMP.
 - IF BRANCHES ARE LESS THAN 0.22 METERS LONG, USE PAD PRINT.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS			3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
1. 2. 3. 4.					DRFT JBJ		DATE 02/14/02	
MATERIAL SEE SPECIFICATIONS			ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=1.5	
FINISH SEE SPECIFICATIONS			CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		DESCRIPTION V6RSC-*/PKG3M-*/*/*/*	
F ADD NOTE #2			RDS 09/26/22 500000006899		DO NOT SCALE THIS DRAWING		IDENTIFICATION NO.	
REV DESCRIPTION			BY DATE ECO NO.		FILE: 777001191		REV F	
							SHEET 1 OF 1	