



Product designation Power contactor
Product type designation B400

Contact characteristics

Number of poles	Nr.	4
Rated insulation voltage U_i IEC/EN	V	1000
Rated impulse withstand voltage U_{imp}	kV	8
Operational frequency	min Hz	25
	max Hz	400
IEC Conventional free air thermal current I_{th}	A	550
Operational current I_e	AC-1 ($\leq 40^\circ\text{C}$)	A 550
	AC-1 ($\leq 55^\circ\text{C}$)	A 430
	AC-1 ($\leq 70^\circ\text{C}$)	A 360
	AC-3 ($\leq 440\text{V} \leq 55^\circ\text{C}$)	A 420
	AC-4 (400V)	A 200
Rated operational power AC-1 ($T \leq 40^\circ\text{C}$)	230V kW	200
	400V kW	345
	500V kW	452
	690V kW	598
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 1 poles in series	75V A	400
	110V A	250
	220V A	--
	330V A	--
	460V A	--
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 2 poles in series	75V A	400
	110V A	400
	220V A	350
	330V A	--
	460V A	--
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 3 poles in series	75V A	400
	110V A	400
	220V A	400
	330V A	350
	460V A	--
IEC max current I_e in DC1 with $L/R \leq 1\text{ms}$ with 4 poles in series	75V A	400
	110V A	400
	220V A	400
	330V A	400
	460V A	350

IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 1 poles in series

75V	A	350
110V	A	200
220V	A	--
330V	A	--
460V	A	--

IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 2 poles in series

75V	A	350
110V	A	350
220V	A	280
330V	A	--
460V	A	--

IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 3 poles in series

75V	A	350
110V	A	350
220V	A	350
330V	A	280
460V	A	--

IEC max current I_e in DC3-DC5 with $L/R \leq 15\text{ms}$ with 4 poles in series

75V	A	350
110V	A	350
220V	A	350
330V	A	280
460V	A	280

Short-time allowable current for 10s (IEC/EN60947-1)

A	3600
---	------

Protection fuse

gG (IEC)	A	630
aM (IEC)	A	400

Making capacity (RMS value)

A	4200
---	------

Breaking capacity at voltage

440V	A	4000
500V	A	3400
690V	A	3360

Resistance per pole (average value)

mΩ	0.2
----	-----

Power dissipation per pole (average value)

I_{th}	W	52
AC-3	W	32

Tightening torque for terminals

min	Nm	35
max	Nm	35
min	Ibin	25.8
max	Ibin	25.8

Tightening torque for coil terminal

min	Nm	1
max	Nm	1
min	Ibin	0.74
max	Ibin	0.74

Max number of wires simultaneously connectable

Nr.	2
-----	---

Conductor section

AWG/Kcmil

max	2x 300 kcmil
-----	--------------

Power terminal protection according to IEC/EN 60529


IP00

Mechanical features


Operating position

	normal allowable	Vertical plan ±30°
Fixing		Screw
Weight	g	11
Operations		
Mechanical life	cycles	10000000
Electrical life	cycles	700000
Safety related data		
Performance level B10d according to EN/ISO 13489-1		
	rated load mechanical load	cycles cycles
		700000 10000000
Mirror contacts according to IEC/EN 60947-4-1		Yes
EMC compatibility		yes
AC coil operating		
Rated AC voltage at 50/60Hz	V	48
AC operating voltage		
of 50/60Hz coil powered at 50Hz		
pick-up		
	min	%Us 80
	max	%Us 110
drop-out		
	min	%Us 20
	max	%Us 60
of 50/60Hz coil powered at 60Hz		
pick-up		
	min	%Us 80
	max	%Us 110
drop-out		
	min	%Us 20
	max	%Us 60
of 60Hz coil powered at 60Hz		
pick-up		
	min	%Us 80
	max	%Us 110
drop-out		
	min	%Us 20
	max	%Us 60
AC average coil consumption at 20°C		
of 50/60Hz coil powered at 50Hz		
	in-rush	VA 300
	holding	VA 10
of 50/60Hz coil powered at 60Hz		
	in-rush	VA 300
	holding	VA 10
Dissipation at holding ≤20°C 50Hz	W	10
DC coil operating		
DC rated control voltage	V	48
DC operating voltage		
pick-up		
	min	%Us 80
	max	%Us 110
drop-out		

		min	%Us	20
		max	%Us	60
Average coil consumption ≤20°C				
		in-rush	W	300
		holding	W	10
Max cycles frequency				
Mechanical operation			cycles/h	2400
Operating times				
Average time for Us control				
in AC				
		Closing NO		
		min	ms	80
		max	ms	120
		Opening NO		
		min	ms	30
		max	ms	75
in DC				
		Closing NO		
		min	ms	80
		max	ms	120
		Opening NO		
		min	ms	30
		max	ms	75
UL technical data				
Rated operational voltage AC (UL)			V	600
Full-load current (FLA) for three-phase AC motor				
		at 480V	A	414
		at 600V	A	382
Yielded mechanical performance				
for three-phase AC motor				
		200/208V	HP	125
		220/230V	HP	150
		460/480V	HP	350
		575/600V	HP	400
General USE				
Contactor				
		AC current	A	550
Short-circuit protection fuse, 600V				
Standard fault				
		Short circuit current	kA	18
		Fuse rating	A	800
		Fuse class		L
Ambient conditions				
Temperature				
Operating temperature				
		min	°C	-50
		max	°C	70
Storage temperature				
		min	°C	-60
		max	°C	80
Max altitude			m	3000
Resistance & Protection				
Pollution degree				3
Dimensions				

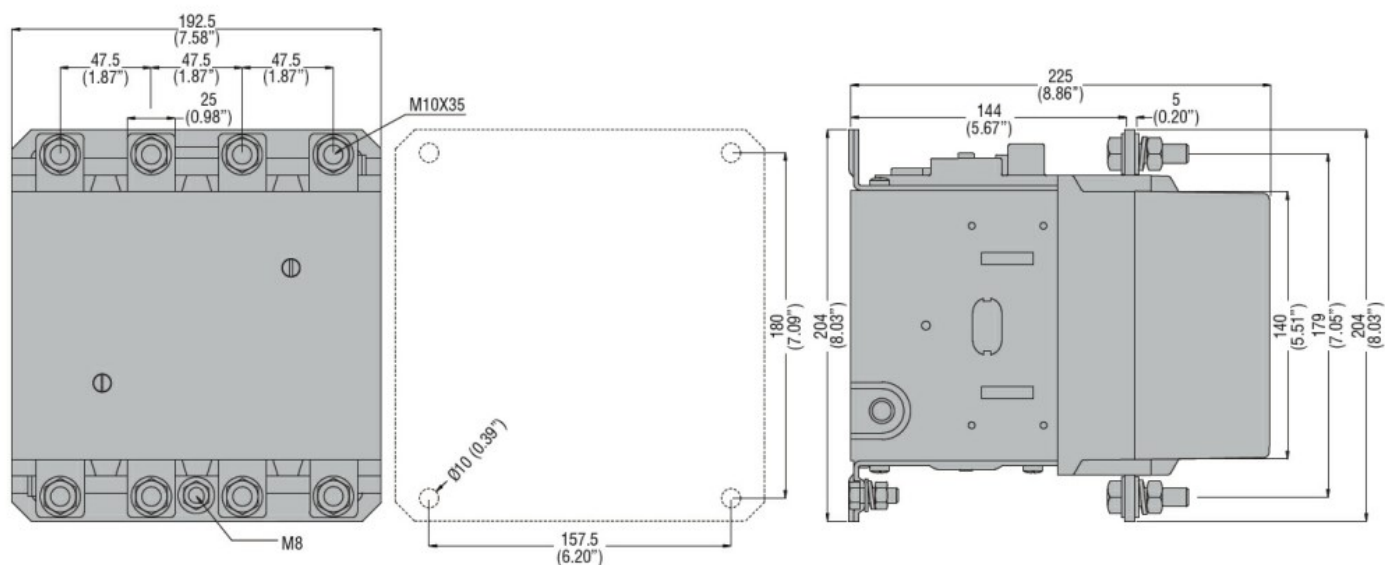

Wiring diagrams

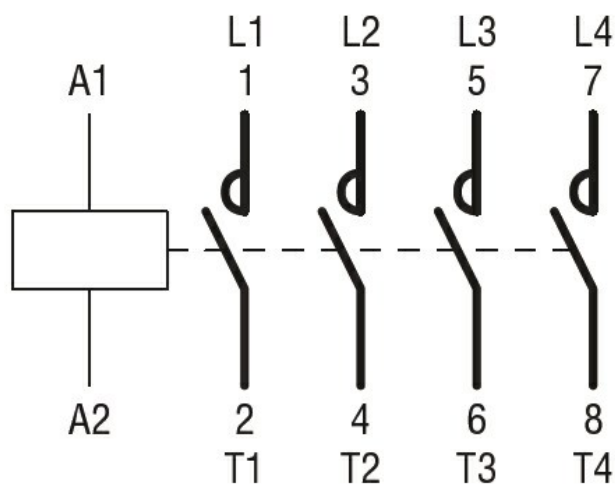

Certifications and compliance

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN 60947-1

IEC/EN 60947-4-1

UL 60947-1

UL 60947-4-1

Certificates

CCC

cULus

EAC

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching