



Product designation

Power contactor

Product type designation


BF26

**Contact characteristics**


Number of poles	Nr.	4
Rated insulation voltage $U_i$ IEC/EN	V	690
Rated impulse withstand voltage $U_{imp}$	kV	6
Operational frequency	min	Hz 25
	max	Hz 400
IEC Conventional free air thermal current $I_{th}$	A	45
Operational current $I_e$	AC-1 ( $\leq 40^\circ\text{C}$ )	A 45
	AC-1 ( $\leq 55^\circ\text{C}$ )	A 36
	AC-1 ( $\leq 70^\circ\text{C}$ )	A 32
	AC-3 ( $\leq 440\text{V } \leq 55^\circ\text{C}$ )	A 26
	AC-4 (400V)	A 11.5
Rated operational power AC-1 ( $T \leq 40^\circ\text{C}$ )	230V	kW 17
	400V	kW 30
	500V	kW 37
	690V	kW 51
Short-time allowable current for 10s (IEC/EN60947-1)	A	210
Protection fuse	gG (IEC)	A 50
	aM (IEC)	A 32
Making capacity (RMS value)	A	260
Breaking capacity at voltage	440V	A 208
	500V	A 184
	690V	A 168
Resistance per pole (average value)	m $\Omega$	2
Power dissipation per pole (average value)	$I_{th}$	W 4
	AC-3	W 1.4
Tightening torque for terminals	min	Nm 2.5
	max	Nm 3
	min	lbin 1.8
	max	lbin 2.2
Tightening torque for coil terminal	min	Nm 0.8
	max	Nm 1
	min	lbin 0.8
	max	lbin 0.74
Max number of wires simultaneously connectable	Nr.	2

Conductor section			
AWG/Kcmil	max		6
Flexible w/o lug conductor section			
	min	mm <sup>2</sup>	2.5
	max	mm <sup>2</sup>	16
Flexible c/w lug conductor section			
	min	mm <sup>2</sup>	1
	max	mm <sup>2</sup>	10
Flexible with insulated spade lug conductor section			
	min	mm <sup>2</sup>	1
	max	mm <sup>2</sup>	10
Power terminal protection according to IEC/EN 60529			IP20 when properly wired
Mechanical features			
Operating position			normal allowable Vertical plan ±30°
Fixing			Screw / DIN rail 35mm
Weight		g	490
Operations			
Mechanical life		cycles	20000000
Electrical life		cycles	1600000
Safety related data			
Performance level B10d according to EN/ISO 13489-1			rated load mechanical load
		cycles	1600000
		cycles	20000000
EMC compatibility			yes
AC coil operating			
Rated AC voltage at 50/60Hz		V	110
AC operating voltage			
of 50/60Hz coil powered at 50Hz			
pick-up		min	%Us 80
		max	%Us 110
drop-out		min	%Us 20
		max	%Us 55
of 50/60Hz coil powered at 60Hz			
pick-up		min	%Us 85
		max	%Us 110
drop-out		min	%Us 20
		max	%Us 55
AC average coil consumption at 20°C			
of 50/60Hz coil powered at 50Hz		in-rush holding	VA 75 VA 9
of 50/60Hz coil powered at 60Hz		in-rush holding	VA 70 VA 6.5
of 60Hz coil powered at 60Hz			

		in-rush holding	VA VA	75 9
Dissipation at holding $\leq 20^{\circ}\text{C}$ 50Hz			W	2.5
Max cycles frequency				
Mechanical operation			cycles/h	3600
Operating times				
Average time for $U_s$ control in AC				
	Closing NO	min max	ms ms	8 24
	Opening NO	min max	ms ms	5 15
	Closing NC	min max	ms ms	11 29
	Opening NC	min max	ms ms	6 14
UL technical data				
Rated operational voltage AC (UL)			V	600
Full-load current (FLA) for three-phase AC motor		at 480V at 600V	A A	21 22
Yielded mechanical performance				
	for single-phase AC motor	110/120V 230V	HP HP	2 5
	for three-phase AC motor	200/208V 220/230V 460/480V 575/600V	HP HP HP HP	7.5 7.5 15 20
General USE				
	Contactor	AC current	A	45
Ambient conditions				
Temperature				
	Operating temperature	min max	$^{\circ}\text{C}$ $^{\circ}\text{C}$	-50 70
	Storage temperature	min max	$^{\circ}\text{C}$ $^{\circ}\text{C}$	-60 80
Max altitude			m	3000
Resistance & Protection				
Pollution degree				3
Dimensions				

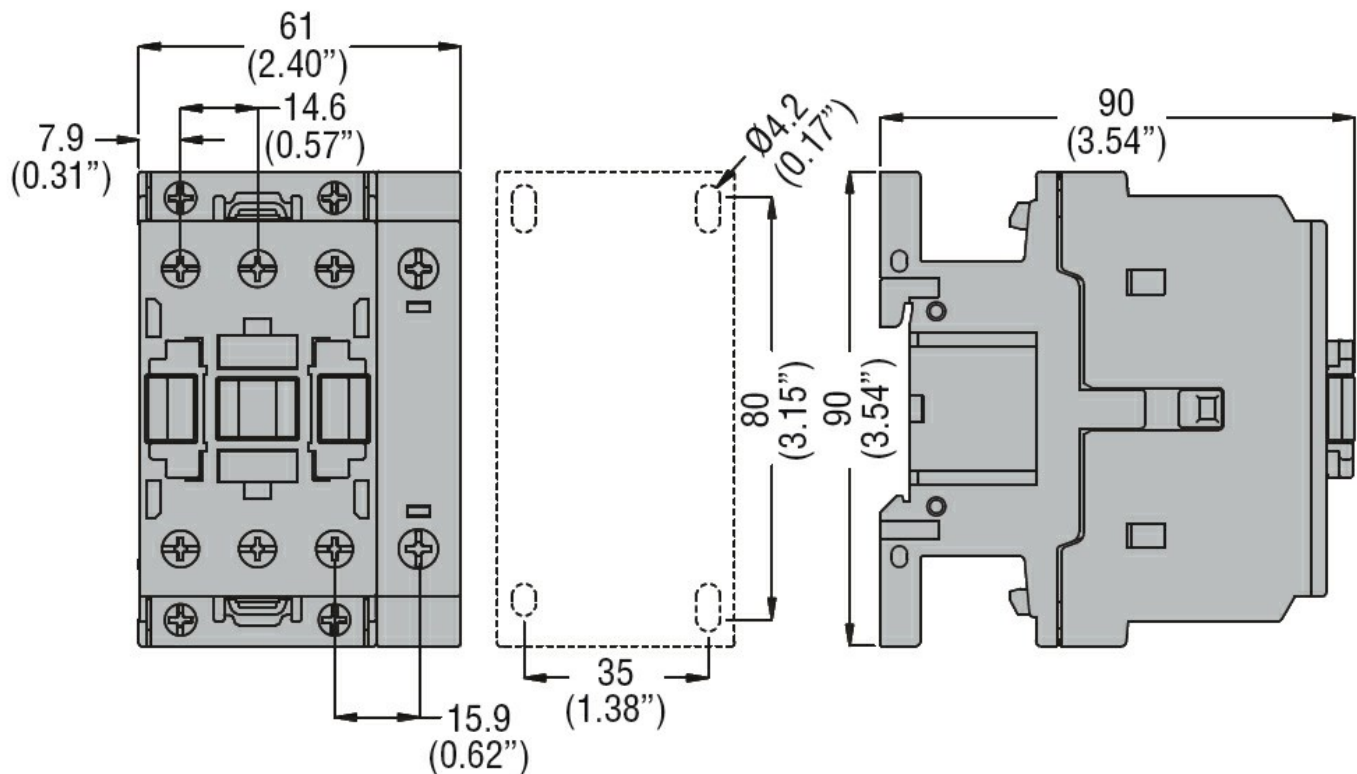

#### Wiring diagrams

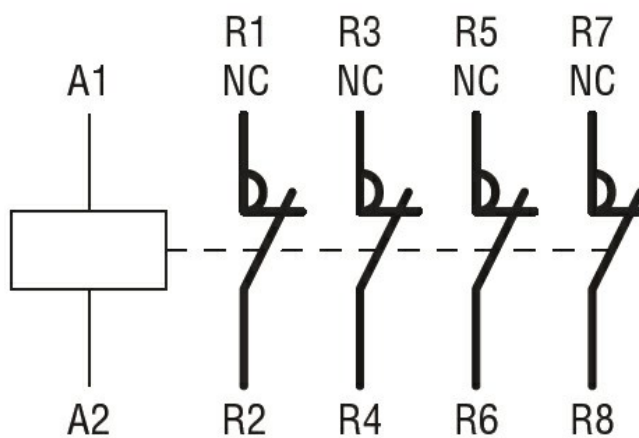

#### Certifications and compliance

##### Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-4-1

IEC/EN/BS 60947-1

IEC/EN/BS 60947-4-1

UL 60947-1

UL 60947-4-1

##### Certificates

CCC

cULus

EAC

#### ETIM classification

ETIM 8.0

EC000066 -  
Power contactor,  
AC switching